

## Development of stroboscopic muography

H. K. M. Tanaka

# Development of stroboscopic muography

**H. K. M. Tanaka**

Earthquake Research Institute, The University of Tokyo, Tokyo, Japan

Received: 9 July 2012 – Accepted: 26 August 2012 – Published: 3 September 2012

Correspondence to: H. K. M. Tanaka (ht@riken.jp)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

Conventional muon radiography has concentrated on non-destructive studies of stationary objects with relatively long exposure times required to achieve sufficient muon statistics. A muon detection system with real time readings and a high spatial resolution detector, enables the investigation of dynamic processes in a stroboscopic mode, where image frames are synchronized with the phases of the dynamic target. Although the natural cosmic-ray muon flux is quite low for imaging a rapid process, repetitive processes can still be studied with high time resolution by integrating a large number of frames synchronized to the process. In this paper we demonstrate the stroboscopic imaging capabilities of cosmic-ray muon radiography with scintillation counters and the muon readout module. The dynamics of a chemical and melting process in an electric furnace with a size of 30 m water equivalent in diameter was investigated as an example, and stroboscopic images were obtained for hourly changes, with acquisition frames of 400 h each. The results of these experiments demonstrate the future potential for muon radiography of repetitional process, such as magma flow in a conduit.

1 Introduction

Cosmic-ray muon radiography and tomography is becoming a new technique for non-destructive studies of gigantic objects. Muon radiography was first proposed to determine a thickness of an overburden of a horizontal tunnel in the Snowy Mountains in Australia (George, 1955). He measured the muon flux inside and outside the tunnel to compare them to confirm that a reduction in the muon flux reflects the average density of the overburden. In 1969, he applied George’s idea to the “Great Pyramid” of Giza to search for undiscovered chambers (Alvarez et al., 1970). The high penetration depth of muons in matter enables studies of the internal structure of geological objects such as volcanoes (Tanaka et al., 2007, 2008, 2009a, 2010; Lesparre et al., 2012) and seismic faults (Tanaka et al., 2011). Interactions of very high energy cosmic rays with the

Development of stroboscopic muography

H. K. M. Tanaka

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



atmosphere produce a flux of high energy muons. These muons come mostly from the vertical, following a known zenith angle distribution. It is also known that muons are arriving in the horizontal direction with a smaller average intensity, but with a higher intensity at energies above a few 100 GeV. These horizontal muons can be used for muon radiography of volcanoes. Muon radiographic imaging relies on attenuation contrast within the objects. If the target geometry is known, the information from counting muon events in the detector at different arriving angles can be used to infer the average density of the matter through which the muons traveled because only the integrated effect along the travel path leads to the attenuation of the flux. The required observation time of the detection system is inversely proportional to the area of the detector used.

Most of the muon radiography measurements have been applied to stationary objects, but only a few dynamic studies have so far been performed (e.g. imaging before and after the 2009 Asama eruption; Tanaka et al., 2009b). One of the reasons which makes it difficult for us to perform real-time or rapid time-sequence radiography is that the relatively low intensity of the cosmic-ray muon flux that leads to long integration times to reach an adequate contrast in muon transmission images. Furthermore, integration times are even longer in the case of high resolution radiography. However, such low cosmic-ray muon flux can be compensated for by averaging a large number of short acquisition frames, in the case of periodic processes. After adding up of all the images for the corresponding time point, an average snapshot image with a better statistics is obtained. The detection systems can be synchronized with the processes of the target, and sufficient muon statistics can be achieved in stroboscopic imaging, after integration of a number of frames. The image is built up by the superposition of a number of short-time datasets.

One of the potential applications for stroboscopic imaging is the investigation of recurrent processes of volcanic eruption that can be seen in for example, Stromboli Volcano in Italy or Pu'u'Oo of Kilauea Volcano in Hawaii. Stromboli has been erupting every five to 20 min for thousands of years between four and six vents in the summit crater, and lava-flows are commonly emitted several times a year and cascade down on

Development of  
stroboscopic  
muography

H. K. M. Tanaka

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion





showers and multi-muon events are rejected by discarding events when more than one signal from the same layer (detector plane) coincides in a time gate of 100 ns (multiplicity cut). The prior experiments on muon imaging with FPGA (field programmable gate array)-based Muon Readout Module, developed by Uchida et al. (2010) demonstrated the very low readout noise, high speed event counting and accurate timing of the acquisition frames. The readout frames can be as short as one microsecond. The histogram of the muon events as a function of azimuth and elevation angles was generated on an internal memory of the FPGA as an HTML (hyper text markup language) file and was accessed and stored by a remote computer.

The detection system has been installed next to by an electric carbide furnace. A diameter of the furnace is 14 m. The distance between the center of the furnace and the detection system is 15 m. The distance between two segmented scintillation detector planes (= position sensitive detector planes: PSD planes) was 100 cm, and a root means square (RMS) angular resolution of the system was  $\pm 14$  mrad at an interval of 33 mrad. The minimum resolvable distance (spatial resolution) at a target object is then defined by the minimum resolvable angle (RMS angular resolution) and the distance between the object and the detection system ( $R$  m):  $\pm 0.014 \times R$  m. “Forward-directed” muon trails can be distinguished from “backward-directed” ones by choosing positive or negative angles, respectively, because muons arriving from below (neutrino induced muons) are negligible to those arriving from above. The combination of high angular resolution, relatively large active area, and the cosmic-ray muon intensity allows stroboscopic imaging with acquisition frames as short as 400 h with a density resolution of 13 % for a target with a size of 30 m water equivalent (mwe) (Tanaka, 2012). The resolution of a the similar type of the detection system was also verified using cosmic-ray muon radiography of a large steel block (Tanaka, 2012). These images and the results of our previous calibrations of spatial resolution of the transmission images confirm that the spatial resolution is limited only by the angular resolutions and intervals of the detection system.

Development of  
stroboscopic  
muography

H. K. M. Tanaka

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The position and orientation of the detection system were optimized by using 3d CAD (computer aided design) models of the buildings and plants in the factory, which provide muon path lengths as a function of azimuth and elevation angles. The location was chosen so that the "backward-directed" muons were not affected by the existence of other buildings and plants. Although the whole area of the detection system is sensitive to muons that come from the near-horizontal direction, it does not catch all the muons that enter at large angles to the horizontal. The azimuth distribution of the "backward-directed" muons was then used to correct the geometrical acceptance of the detection system. Total weight of the detection system is about 15 kg, and therefore it was possible for us to place the system in a relatively small housing that can keep higher pressures inside in order to avoid dust contamination (Fig. 1). The observation altitude was near the sea level.

A carbide molten layer has different densities ( $2.0\text{--}2.1\text{ g cm}^{-3}$ ) from other layers (namely, heat, diffusion, and reaction layers) ( $1.4\text{--}2.0\text{ g cm}^{-3}$ ) in the furnace (Fig. 2). The thickest part of the furnace is therefore  $\sim 30$  mwe. Based on the steel block experiment, it was confirmed that a density resolution of 13 % for total data acquisition time of 400 h is sufficient for us to image the boundary between the melting and other layers in the furnace. Since electric furnaces require a large amount of electricity, electric load patterns change according to the electricity price per kWh. The plant operational conditions, therefore, frequently change in a day. Conventionally, the internal conditions of the furnace have been estimated based on the operator's experiences and estimation imagination. We attempted to obtain stroboscopic images with better statistics by adding up all the snapshots for the corresponding electric load patterns. Periodic electric load patterns are shown in Fig. 3. The load is a purely two-state system, where there is a certain rise time but the fall time is negligible.

## Development of stroboscopic muography

H. K. M. Tanaka

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3 Results and discussions

The low muon statistics in the dynamic muon radiography can be substantially improved if the process under study is repetitional. In this case, a number of phase-locked frames can be integrated to form one image which has sufficient statistics without degrading spatial resolution of the image. As a proof of principle measurement, the electric furnace under the different load patterns has been imaged in a stroboscopic mode with 10-min frames, but total data acquisition time is 400 h per image in this work. The total numbers of collected muons are 226 694 for a high electric load condition (total observation time of 195 h), and 238 137 for a low electric load condition (total observation time of 205 h), respectively. The acquisition frames are synchronized to the trigger provided by the electric load levels. A number of frames needs to be integrated in order to achieve the high spatial resolution of the resulting “frozen in time” image.

Figure 4 compares muographs between high and low electric loads. This figure shows the muon transmission rate distribution projected on the cross-sectional plane that is parallel to the detector plane. The more materials, the fewer the muons there will be that have enough energy to get through the furnace. There, the “more materials” simply refers to higher density in the vertical direction because of the cylindrical shape of the target. When we perform muon radiography of a target with such a simple geometry, and when the information on absolute density values is not necessary, muon transmission mappings are not usually converted into average density mappings in order to reduce errors associated to 3-D geometrical modeling of the experimental setup that includes the target and the detection system. Therefore, only the horizontal distribution of the muons was corrected in this image. In Fig. 4, we can see an increase in the muon transmission rate towards the edge of the furnace in general, and a maximum transmission rate at an elevation anagle of 165 mrad (2.5 m above the base at the center of the furnace), which comes from a competition between a decrease in geometrical acceptance and an increase in zenith-angular dependence of the muon intensity.

Development of stroboscopic muography

H. K. M. Tanaka

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Green to blue regions in the figure shows relatively low muon transmission rates that indicate high densities. When higher electric loads are applied, a thickness of the high density region increases. This is consistent with our vision that a temperature rises and more molten materials deposit at the bottom of the furnace when higher electric loads are applied. Overall, our detection system reached the acceptable levels for the stroboscopic imaging of the target the whose size of an industrial plant.

#### 4 Conclusions

With conventional muon radiography, only averaged flow distributions can be studied. The example of muon imaging of dynamic processes shown in this work, indicate that muon detection system using scintillation counters and the muon readout module, can provide some novel, stroboscopic imaging techniques. A number of frames must be acquired since the muon statistics is limited by the natural cosmic ray flux. However, even with very limited muon statistics, dynamic processes such as magma propagation, or two-phase flow in a conduit, can be studied with short acquisition frames by using a detection system with a larger active area and integration over a large number of frames. For example, lava flows erupted from Pu'u'Oo are typically 5–10 m thick and at speeds of 50–500 m h<sup>-1</sup>. As in the case of monitoring Pu'u'Oo eruptions, we assumed a simple cylindrical model with a diameter of 500 mwe, and a uniform density of 2.0 g cm<sup>-3</sup> that includes a magma pathway of 20 m in diameter, then calculated the time required to detect magma in the pathway. The number of muons that can cross 500 mwe and 460 mwe is 0.15 m<sup>-2</sup> min<sup>-1</sup> and 0.18 m<sup>-2</sup> min<sup>-1</sup>, respectively. If we assume that the detector's active area and angular resolution is 1 m<sup>2</sup> and 100 mrad, and 50 frames are available for the integration, the time required to detect the magma at 2σ confidence level will be 20 min. From 1983 to 1986, a series of 44 lava fountains built a Pu'u'Oo, and thus, the number of frames we assumed here is reasonable.

### Development of stroboscopic muography

H. K. M. Tanaka

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion





*Acknowledgements.* The experiment was supported by a collaborative research between DENKA (Denki Kagaku Kogyo Kabushiki Kaisha) and University of Tokyo. This work greatly benefited from suggestions by Justin Albert and anonymous reviewers.

## References

- 5 D'Auria, L.: Perspectives of muon radiography for Stromboli, International Workshop on Muon Radiography of Volcanoes, 11–12 October 2010, Naples, Italy, 2010.
- Garcia, M. O., Pietruszka, A. J., Rhodes, J. M., and Swanson, K.: Magmatic Processes During the Prolonged Pu'u 'O'o Eruption of Kilauea Volcano, Hawaii, *J. Petrol.*, 967–990, doi:10.1093/petrology/41.7.967, 2000.
- 10 Lesparre, N., Gibert, D., Marteau, J., Komorowski, J.-C., Nicollin, F., and Coutant, O.: Density muon radiography of La Soufrière of Guadeloupe volcano: comparison with geological, electrical resistivity and gravity data, *Geophys. J. Int.*, 190, 1008–1019, doi:10.1111/j.1365-246X.2012.05546.x, 2012.
- Tanaka, H. K. M., Nakano, T., Takahashi, S., Yoshida, J., Takeo, M., Oikawa, J., Ohminato, T., Aoki, Y., Koyama, E., Tsuji, H., and Niwa, K.: High resolution imaging in the inhomogeneous crust with cosmic ray muon radiography: The density structure below the volcanic crater floor of Mt. Asama, Japan, *Earth Planet. Sc. Lett.*, 263, 104–113, 2007.
- 15 Tanaka, H. K. M., Nakano, T., Takahashi, S., Yoshida, J., Takeo, M., Oikawa, J., Ohminato, T., Aoki, Y., Koyama, E., Tsuji, H., Ohshima, H., Maekawa, T., Watanabe, H., and Niwa, K.: Radiographic imaging below a volcanic crater floor with cosmic-ray muons, *Am. J. Sci.*, 308, 843–850, 2008.
- 20 Tanaka, H. K. M., Uchida, T., Tanaka, M., Shinohara, H., and Taira, H.: Cosmic-ray muon imaging of magma in a conduit: Degassing process of Satsuma-Iwojima Volcano, Japan, *Geophys. Res. Lett.*, 36, L01304, doi:10.1029/2008GL036451, 2009a.
- 25 Tanaka, H. K. M., Uchida, T., Tanaka, M., Takeo, M., Oikawa, J., Ohminato, T., Aoki, Y., Koyama, E., and Tsuji, H.: Detecting a mass change inside a volcano by cosmic-ray muon radiography (muography): First results from measurements at Asama volcano, Japan, *Geophys. Res. Lett.*, 36, L17302, doi:10.1029/2009GL039448, 2009b.

**GID**

2, 671–684, 2012

## Development of stroboscopic muography

H. K. M. Tanaka

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Tanaka, H. K. M., Miyajima, H., Kusagaya, T., Taketa, A., Uchida, T., and Tanaka, M.: Cosmic muon imaging of hidden seismic fault zones: Rainwater permeation into the mechanical fractured zones in Itoigawa-Shizuoka Tectonic Line, Japan, Earth Planet. Sc. Lett., 306, 156–162, 2011.

- 5 Tanaka, H. K. M.: Evaluation of positioning and density profiling accuracy of muon radiography by utilizing a 15-ton steel block, Geosci. Instrum. Method. Data Syst. Discuss., 2, 643–656, doi:10.5194/gid-2-643-2012, 2012.

## Development of stroboscopic muography

H. K. M. Tanaka

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back


Close

Full Screen / Esc


Printer-friendly Version

Interactive Discussion



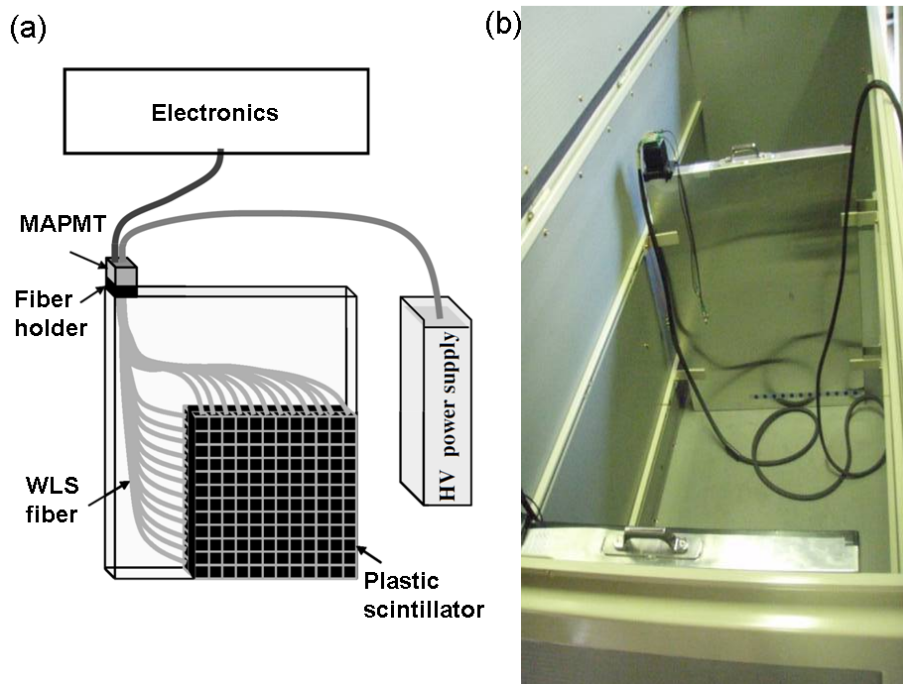


**Fig. 1.** Schematic view of the position sensitive detector (PSD) plane **(a)** and a photograph of the present experimental setup in a steel housing **(b)**. The housing was designed so that the distance between two PSD planes is adjustable, and the inside air pressure is controllable.

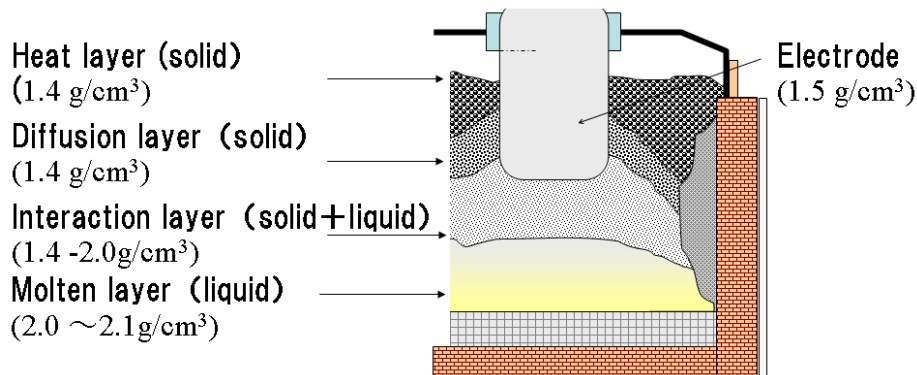


**Fig. 2.** Reaction model of a electric carbide furnace.

## Development of stroboscopic muography

H. K. M. Tanaka

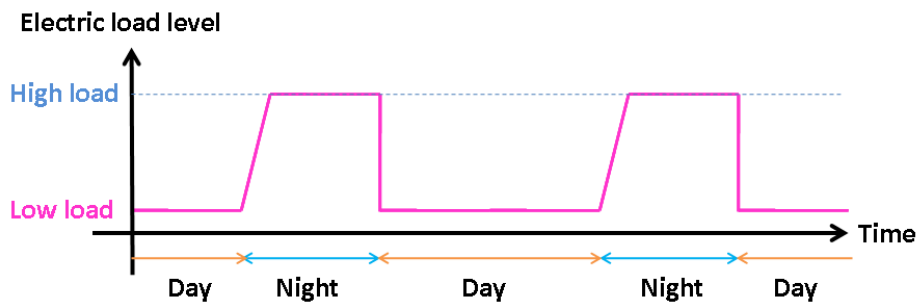

**Fig. 3.** Periodic electric load pattern applied to the electric furnace.

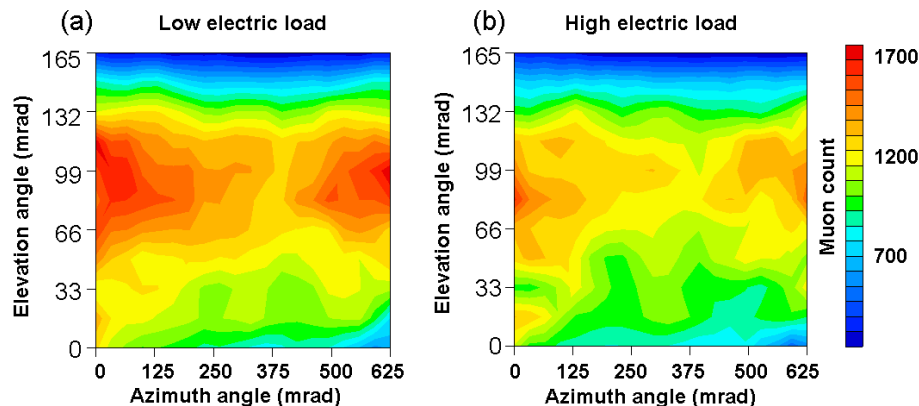

**Fig. 4.** Stroboscopic muographs reconstructed with acquisition frames of 400 h each to achieve the high spatial resolution of the electric furnace under **(a)** low electric load and **(b)** high electric load conditions.

## Development of stroboscopic muography

H. K. M. Tanaka

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

