

First conclusions about results of GPR investigations in the Church of the Assumption of the Blessed Virgin Mary in Kłodzko, Poland

Anatolii Chernov¹, Dariusz Dziubacki², Martina Cogoni³, Alexandru Bădescu⁴

¹Institute of Geology, Department of Geophysics, Taras Shevchenko National University of Kyiv, Kyiv, Ukraine

5 ²Faculty of Geology, Geophysics and Environmental Protection, Department of Geophysics, AGH University of Science and Technology, Krakow, Poland

³Department of Civil Engineering, Environmental Engineering and Architecture, University of Cagliari, Cagliari, Italy

⁴Faculty of Geology and Geophysics, Department of Geophysics, University of Bucharest, Bucharest, Romania

10 *Correspondence to:* Chernov Anatolii (achernovp@gmail.com)

Abstract. The article shows results of Ground Penetrating Radar (GPR) investigation in the Church of the Assumption of the Blessed Virgin Mary (XIV–XVI AD) in Kłodzko, Poland. Due to the wars in the 20th century, the majority of the documents connected with the church's history was lost. Under the floor of the catholic temple, unknown structures might exist. To verify the presence of underground structures such as crypts and tombs, a GPR survey was carried out in chapels and aisles
15 with 500 and 800 MHz GPR shielded antennas. Numerous anomalies were detected under the chapels and it was concluded that they were caused by the presence of crypts beneath the floor.

1. Introduction

Significant progress in archaeology was possible thanks to the advancement of Ground Penetrating Radar (GPR) technology and methodology. GPR is widely used in several scientific fields, such as geology, environmental and civil engineering, and
20 more. In archeology, GPR offers a good image of what could lie underground, for instance: caves, tombs and buried objects. The concept of GPR is well known. An electromagnetic pulse is directed to the ground. Heterogeneities cause reflections that are detected by a receiver (Annan and Cosway, 1992).

The GPR investigation presented in this paper took place in the Church of the Assumption of the Blessed Virgin Mary in Kłodzko. This is a town in the south-western part of Poland. The first information about a sacral building in this region
25 comes from the 12th century. The current catholic temple was constructed from the 14th to the 16th century. Its founder was Ernest of Pardubitz, the first Archbishop of Prague. In the beginning, it was a Joannites property, but soon it moved under the Jesuites management. Nowadays the church is administered by the Jesuits order (www.klodzko.pl – Religious monuments, 2017).

Mortuary chambers which are situated on the territory of the church are as follows: remains of Ernest of Pardubitz (the first
30 Archbishop of Prague); Dead People's Chapel immediately adjacent to the north aisle (the remains of Count Montani of Oldrzychowice) – surveyed site; the Main Altar of 1727–1729; The Altar of the Assumption of the Blessed Virgin Mary (1725); Chapel of St. Jacob (also a surveyed site) (www.klodzko.pl – Religious monuments, 2017) and (Parafia Rzymskokatolicka WNMP, 2017).

Most of the documents connected with the church, like parish chronicles, were burned during the Second World War. Therefore, the main sources of information were church's sketches presented in Fig. 1, Fig. 2 and a few websites. General knowledge about the temple's underground is still poor. The aim of the presented work is to verify the presence of structures under the church's floor.

5 2. Acquisition and processing

Surveys were conducted in aisles and chapels. Radargrams were recorded with a GPR ProEx by MALÅ Geoscience equipped with 500 MHz and 800 MHz shielded antennas. Velocity for the surrounding medium was established as 0.1 m/ns (based on similar investigations (Panisova et al., 2016) and processing approach (Persico, 2014, pp. 13–16)). Localization of the profiles in aisles is shown in Fig. 1 (profiles from 500 MHz antenna), in Dead People's Chapel in the Fig. 2 (a), (b) 10 (profiles recorded with 500 MHz (a) and 800 MHz (b) antenna). Figure 2 (c) shows profiles from the Chapel of St. Jacob recorded with 800 MHz antenna. The chapels' floors were covered by a regular grid of profiles. Anomalies which were detected on radargrams are shown with green ovals on the ground floor plans (Fig.1, Fig.2). The processing sequence for recorded radargrams include routine steps (Karczewski et al., 2011).

3. Analysis and interpretation

15 3.1. Aisles

Several clear hyperbolic anomalies were recorded along the aisles at a depth of 50–75 ns (3–4 m) with both 500 and 800 MHz antennas. The shape of upper part of the reflectors at a depth of 50–75 ns (3–4 m) along the aisles resembles a curve of 15 m radius circle according to the evaluation of the angle between branches of hyperbolic anomalies (e.g. PR 8 on Fig. 3, anomalies "a"). Shallow anomalies (2–20 ns) along the PR 8 profile (on the distance 2–5 m, 14–18 m, 22–24 m) are marked 20 in the Fig. 1 (anomalies "b,c,d"). These anomalies are probably caused by the foundations of the pillars (Daniels, 2004, p.356). Shallow anomalies and strong reflections at a distance 31.8–36.2 m are connected with elements of central heating system under the floor (Fig. 3, anomaly "e"). According to the comparison of the data obtained along and across aisles and information about the setting of the former church, (www.klodzko.pl – Religious monuments, 2017), it is possible that reflections from 50 to 75 ns might be caused by a presence of foundation remains of a previous sacral building. Despite the 25 fact that antennas were shielded these anomalies might be reflections from the ceiling of the church (vaults of the naves) (Daniels, 2004, pp. 335–339). Analysis of the velocity of the hyperbolic reflections gave values from the 0.25 m/ns to 0.30 m/ns. The shape of the reflections indicates the presence of diffraction.

3.2. Dead People's Chapel

Radargrams registered with the 500 MHz antenna show hyperbolic anomaly at 6 ns (corresponding to a depth of 0.3 m). The 30 anomaly is visible clearly on radargram from the PPR 14 profile (Fig.4 (a), anomaly "f"). There is also another reflection

visible at the 26–32 ns (1.2–1.6 m) (anomaly “g”). Radargram from 800 MHz antenna shows also clear anomaly at 50 ns (2.5 m), which is worse visible on the data from 500 MHz antenna (anomaly “h”). Figure 4 (c) shows radargram obtained along the P 9 profile which is perpendicular to the P 1 (Fig.4 (b)). The deepest reflection at time 50 ns is still visible. Reflection at 26 ns continues from the beginning to the end of the profile with changing depth.

- 5 The hyperbolic anomaly at 6 ns is interpreted as a reflection from the ceiling (vault) of the crypt. It is the most probable interpretation of this anomaly. Crypts and tombs are common in the middle-aged catholic temples. In this church, there are various crypts which are marked on the ground floor plan, e.g. crypt under the PPR 19 and the PPR 20 profiles in Fig. 2 (b) (probably Count Montani’s crypt). However, the recorded crypt considered to be new, because there is no sign of it on the church sketches (Fig. 2 (a), (b)). The shape of the anomaly suggests that the entrance to it may be under the altar, on the
- 10 outer side of the wall. The shape of this reflection also suggests that it might be connected with already known crypt which is justified because in Fig. 4 (c) this reflection appears at different times. The shape of the anomaly from 26 ns may be classified by velocity pull-up (Conyers, 2014, pp. 171–175) and can be interpreted as a coffin in the crypt, or crypt’s floor. Velocity pull-up is a phenomenon which appears on a radargram when electromagnetic wave meets high-velocity medium surrounded by a low-velocity one. Reflections from the velocity boundary at the bottom of the anomaly are pulled up. The
- 15 deepest anomaly from 50 ns could be defined as multiple reflections from the ceiling of the chapel. Another possible interpretation is that these might be remains of the previous church.

Probable dimensions of the discovered crypt are 3 m in width and 1.8–2.5 m in height. The velocity of the electromagnetic wave in the crypt (0.3 m/ns) is three times higher than the velocity in the ground, so the apparent height of the crypt presented on the radargram (Fig. 4 (a), (b)) is different (0.6–1 m), because value 0.1 m/s was applied as average velocity for

20 radargram. Therefore, it was assumed that the crypt is filled with the air.

3.3. Chaple of St. Jacob

The hyperbolic anomaly at 4 ns (0.2 m) is visible on the radargrams from this chapel (Fig. 5 (a), (b), anomaly “i”). The difference between similar anomalies (6 ns from Dead People’s Chapel) is that directly under the main reflection there are many smaller disturbances. Like in the previous Dead People’s Chapel, reflections at 50 ns are visible.

- 25 The main hyperbolic reflection at a depth of 4 ns (0.18 m) is interpreted as a vault of the crypt (Fig. 5 (a), (b)). The changes in the shape of the anomaly are associated with the direction of profiles. Vault can be described as a barrel vault or pointed barrel vault (Imposa and Grassi., 2015 ; Barilaro et al., 2007). In that case, on profiles crossing perpendicularly to its stretch a hyperbolic anomaly was detected (Fig. 5 (a)). Radargrams collected parallel to the stretch of the vault showed flat reflections (Fig. 5 (b)), because the shape of the crypt’s ceiling was lateral under them.
- 30 Probable size of the crypt is 2 m in width. The crypt is also a newly discovered underground object. Because of the shape and location of the anomaly, expected entrance to the tomb is outside the chapel.

It should be mentioned that our results were compared with similar surveys that had been conducted in the Church of St. George (Panisova et al., 2016): researchers evaluated the same velocity for the underground medium as we did – 0.1 m/ns.

They detected the reflection corresponding to the upper part of the crypts at 10 ns (our 4–6 ns) and 20–24 ns (our 26 ns) to the lower part.

4. Conclusions

As a result of the investigations carried out in the church in Kłodzko, locations of two previously unknown crypts were discovered, just beneath the chapel's floor; their location and size were estimated. Their position suggests that entrance to the crypts may be outside the church. The complexity of the radargram image from the Dead People's Chapel gives reasons to expect potential connections between the newly discovered crypt and already known one.

The majority of the radargrams recorder along profiles in aisles and chapels include hyperbolic anomalies at a depth 50–75 ns (2.5–3.8 m). They are probably the effect of electromagnetic wave diffraction. In that case two explanations are proposed.

- 10 The first is that their origin is probably connected with remains of previous church, second, that these are the diffraction points on the ceiling of the catholic temple.

This research might be helpful for future investigations, especially archeological excavations and restoration works.

Considering that GPR surveying resolution is evaluated as 1/4 of the electromagnetic wavelength, it was concluded that better vertical resolution could be obtained with 800 MHz than 500 MHz antenna.

15 5. Acknowledgement

The authors would like to express their gratitude to the Society of Exploration Geophysicists, TGS, organizers of SEG Field Camp 2016 (SEG Student Chapter Cracow & SEG Bucharest Student Chapter). The authors are grateful to COST (European Cooperation in Science and Technology) Action TU1208 "Civil engineering applications of Ground Penetrating Radar" (www.cost.eu, www.GPRadar.eu) for fostering and supporting cooperation among different countries. The authors thank the

20 Action for giving them the opportunity to present the results of investigation during the European Geosciences Union (EGU) General Assembly 2017. The authors would like to express their deepest gratitude to Dr Jerzy Ziętek and MSc Anna Strzępowicz from AGH University of Science and Technology for support during investigation and sketches preparation.

6. References

- Annan, A., P., Cosway, S., W.: Ground Penetrating Radar Survey Design, Symposium on the Application of Geophysics to Engineering and Environmental Problems 1992: pp. 329–351, 1992.
- 25 Barilaro, D., Branca, C., Gresta, S., Imposa, S., Leone, A., Majolino, D., Case study. Ground penetrating radar (G.P.R.) surveys applied to the research of crypts in San Sebastiano's church in Catania (Sicily), J. Cult. Herit., Vol. 8, 73–76, doi: 0.1016/j.culher.2006.10.003, 2007.

- Chernov, A., Cogoni, M., Dziubacki, D., Bădescu, A.: Processing and interpretation of GPR data collected in the Church of the Assumption of the Blessed Virgin Mary in Klodzko, Poland, EGU General Assembly, Vienna, Austria, 23–28 April 2017, EGU2017-18298, 2017.
- Conyers, B., L.: Interpreting Ground-penetrating Radar for Archaeology, 1st ed., Routledge, 2014, New York.
- 5 Daniels, D. J.: Ground Penetrating Radar, 2nd ed., Vol. 1, The Institution of Engineering and Technology, London, 2007.
- Karczewski, J., Ortyl, Ł., Pasterniak, M.: Zarys metody georadarowej, 2nd ed, Wydawnictwo AGH, Cracow, 2011
- Imposa, S., Grassi, S., Georadar survey inside the Santa Maria Maggiore church of Ispica (Sicily-Italy), Environ. Earth. Sci., Vol. 73, doi: 10.1007/s12665-014-3542-9, 2015.
- Panisova, J., Murín, I., Pašteka, R., Haličková, J., Brunčák, P., Pohánka, V., Papčo, J., Milo, P.: Geophysical fingerprints of
 10 shallow cultural structures from microgravity and GPR measurements in the Church of St. George, Svätý Jur, Slovakia, J. Appl. Geophys., Vol. 127, 102–111, doi: 10.1016/j.jappgeo.2016.02.009, 2016.
- Parafia Rzymskokatolicka Wniebowzięcia Najświętszej Maryi Panny, Klodzko.jezuici.pl [online] Available from: <http://www.klodzko.jezuici.pl/historia.html> (Accessed 1 May 2017), 2017.
- Persico, R., Introduction to ground penetrating radar, John Wiley & Sons, Inc., Hoboken, New Jersey, 2014, pp. 13–16.
- 15 www.klodzko.pl – Religious monuments, [Klodzko.pl](http://www.klodzko.pl) [online] Available from: <http://www.klodzko.pl/en/for-tourists/monuments-of-klodzko/173-the-church> (Accessed 3 May 2017), 2017.

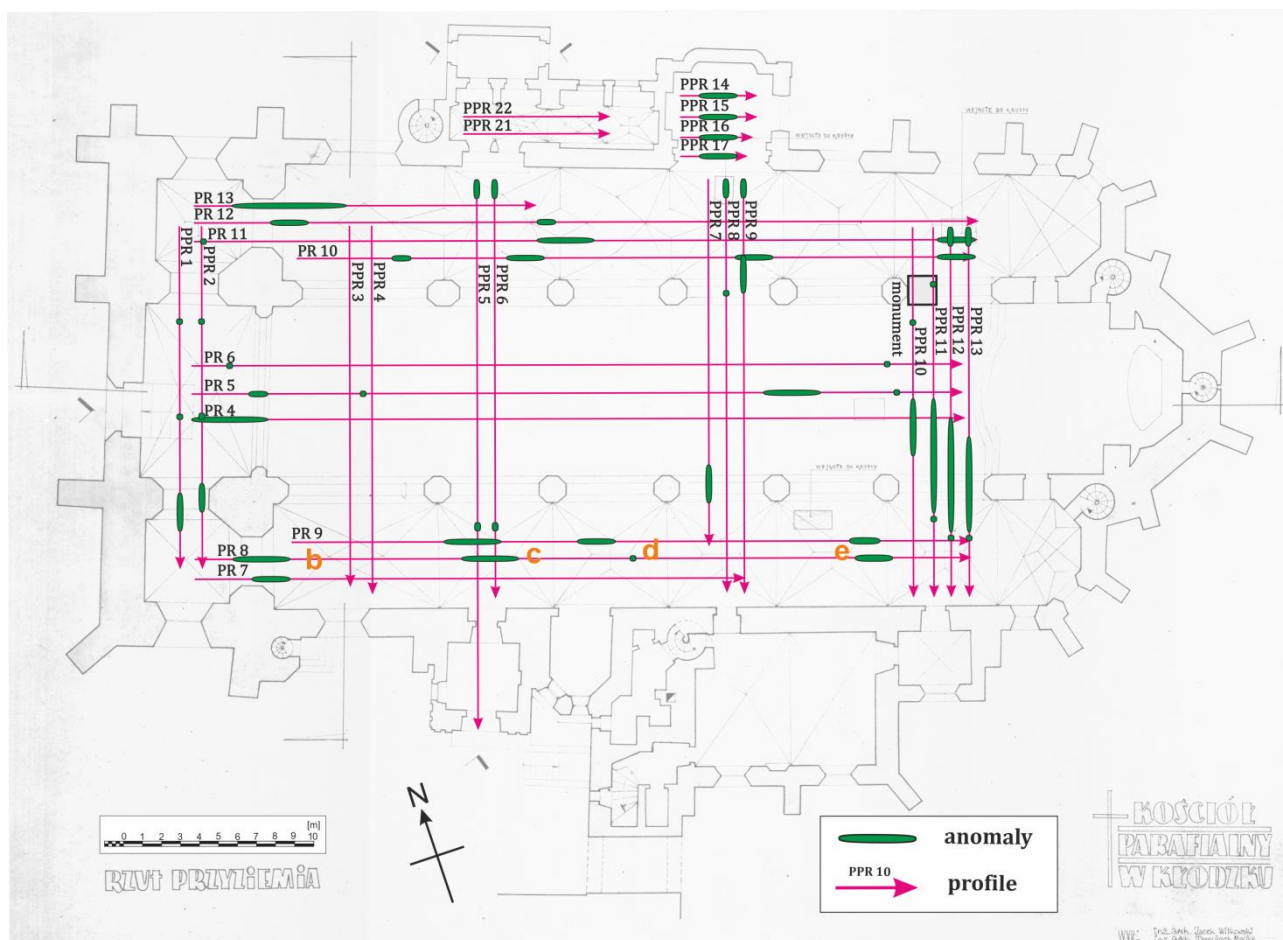


Figure 1. Ground floor plan of the Church with profiles (red) and anomalies (green) set by 500 MHz antenna. Visualization thanks to the Department of Geophysics, AGH University of Science and Technology.

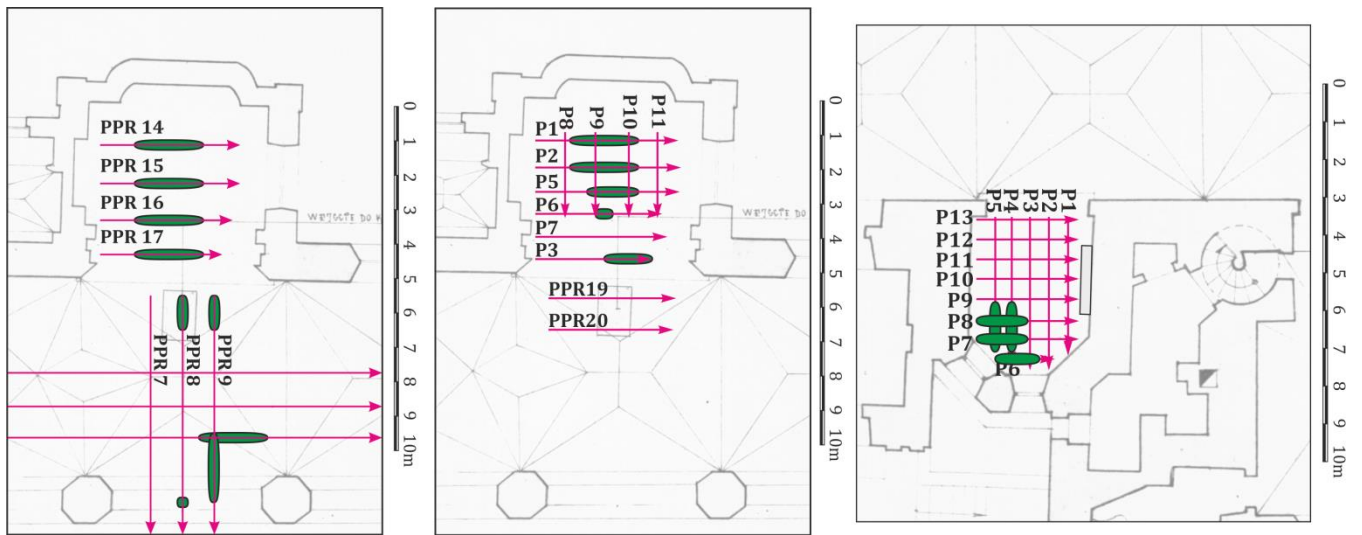


Figure 2. (a) Ground floor plan of the Dead's People Chapel with profiles set by 500 MHz antenna.(PPR 14, PPR 15, PPR 16, PPR 17). (b) Ground floor plan of the Dead's People Chapel with profiles set by 800 MHz antenna. (P1, P2, P3, P5, P6, P7, P8m P9, P10, P11). (c) Ground floor plan of the Chapel of St. Jacob with profiles set by 800 MHz antenna. (P1 – P5 & P6 – P13). Visualization thanks to the Department of Geophysics, AGH University of Science and Technology.

5

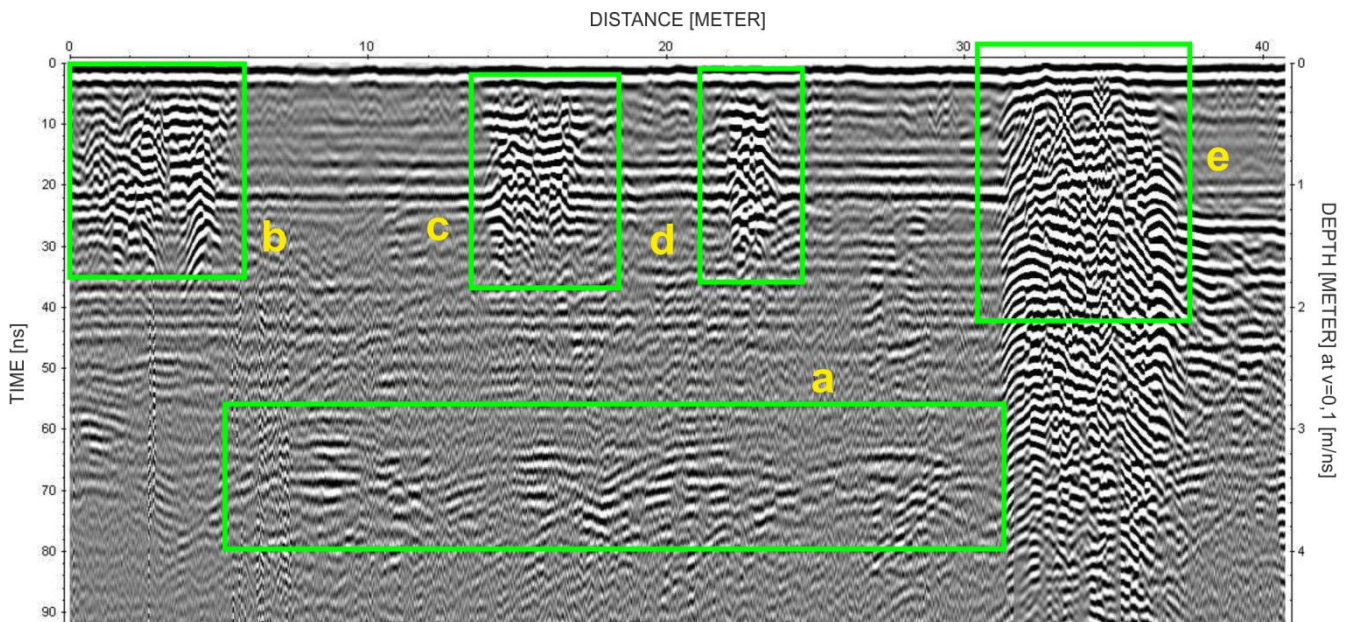


Figure 3. Profile PR8, antenna 500 MHz

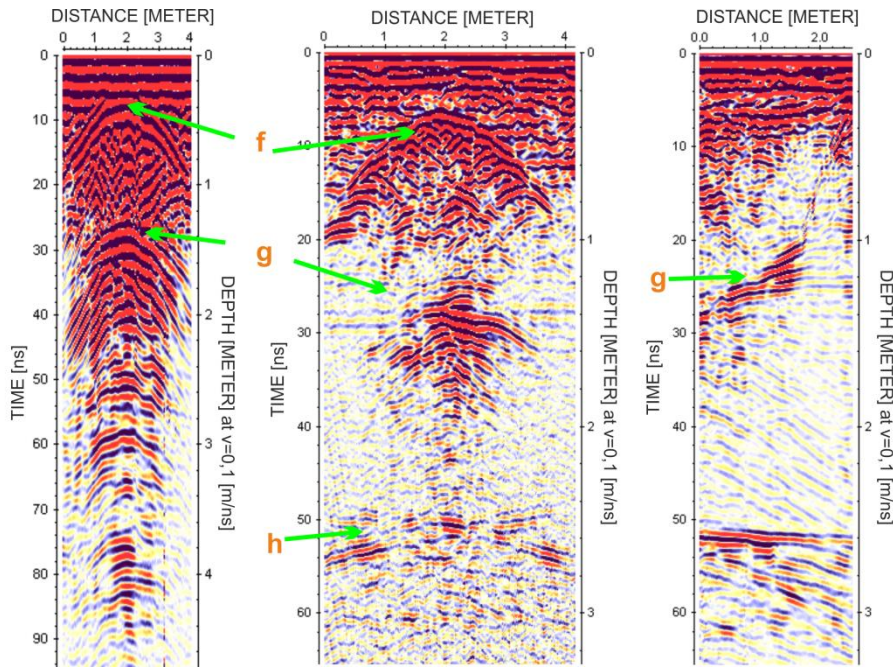


Figure 4. (a) Profile PPR 14, 500 MHz antenna, (b) Profile P. 1., antenna 800 MHz, (c) Profile P. 9., (perpendicular to the previous one) antenna 800 MHz

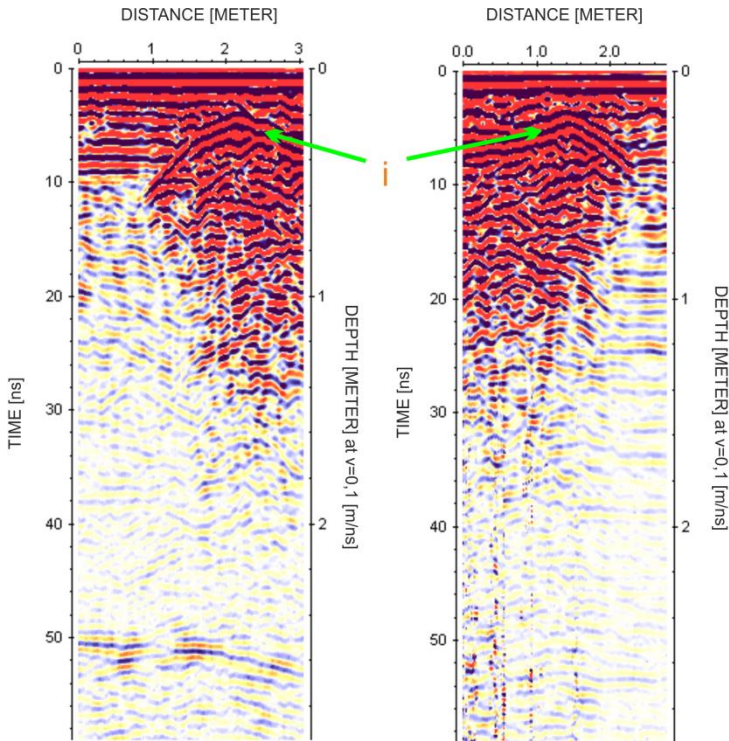


Figure 5. (a) Profile P5, antenna 800 MHz, (b) Profile P8, antenna 800 MHz