

**In response to referee 1**

We have re-organized the introduction as suggested, moving a section on the evolution of ocean mapping technology to an earlier point in the manuscript.

We have also made the other recommended edits.

5

**In response to referee 2.**

We have moved a section that begins the description of GGGs from the Introduction to the beginning of section

2. We have also fixed the paragraph numbering problem that was noted.

10 The remainder of this document shows all changes that were made. It has been saved as a pdf from an MS word document with track changes enabled.

## A Global Geographic Grid System for Visualizing Bathymetry

15 Colin Ware<sup>1</sup>, Larry Mayer<sup>1</sup>, Paul Johnson<sup>1</sup>, Martin Jakobsson<sup>2</sup>, Vicki Ferrini<sup>3</sup>

<sup>1</sup>Center for Coastal and Ocean Mapping, University of New Hampshire, Durham NH, 03924 USA

<sup>2</sup>Department of Geological Sciences, Stockholm University, Stockholm, Sweden

<sup>3</sup>Lamont-Doherty Earth Observatory, Columbia University, USA

*Correspondence to:* Colin Ware (cware@ccom.unh.edu)

20

**Abstract.** A Global Geographic Grid System (Global GGS) is here introduced to support the display of gridded bathymetric data at whatever resolution is available in a visually seamless manner. The Global GGS combines a quad-tree metagrid hierarchy with a system of compatible data grids. Metagrid nodes define the boundaries of data grids. Data grids are regular grids of depth values, coarse grids are used to represent sparse data and finer grids are used to represent high resolution data. Both metagrids and data 25 grids are defined in geographic coordinates to allow broad compatibility with the widest range of geospatial software packages. An important goal of the Global GGS is to support the meshing of adjacent tiles with different resolutions so as to create a seamless surface. This is accomplished by ensuring that abutting data grids either match exactly with respect to their grid-cell size or only differ by powers of two. The oversampling of geographic data grids, which occurs towards the poles due to the convergence of meridians, is addressed by reducing the number of columns (longitude sampling) by powers of two at appropriate lines of latitude.

30 In addition to the specification of the Global GGS, this paper describes a proof-of-concept implementation and some possible variants.

## 1 Introduction

It is safe to say that geographic coordinates are by far the most widely used method for specifying locations on the earth's surface. They are also used commonly to specify regular grids of height values sometimes called digital terrain models (DTMs) or digital 35 elevation models (DEMs) (Li, 2004). A great advantage of these is compact storage, because with a geographic grid, individual grid cell locations need not be stored; instead it is only necessary to specify a bounding box in geographic coordinates, together with the number of rows and columns. Given equal spacing, the location of an individual grid point can be easily computed. Unfortunately, when portrayed on a sphere, grids based on geographic coordinates suffer from problems at the geographic poles due to convergence of meridional lines. This results in oversampling in the zonal direction (along lines of latitude). The Global 40 Geographic Grid System (Global GGS) proposed here is designed to retain the advantages of geographic coordinates while minimizing the problems of oversampling at the poles.

The term geographic coordinates commonly refers to the use of latitude, longitude and elevation to specify a location on Earth. The concept has a very long history, dating to Eratosthenes of Cyrene in the 3rd century BCE (McPhail, 2011). The use of degrees 45 to specify angle is similarly ancient, dating to the ancient Babylonians. The International Meridian Conference of 1884 set the 0 longitude meridian through the Greenwich Observatory in England and standardized the system that is used today.

The motivation for the gridding system described here comes from the Nippon Foundation- GEBCO -Seabed 2030 project (Mayer 50 et al. 2018). Seabed 2030 is an initiative to map the world's oceans to a set of specified resolutions by the year 2030 (<https://seabed2030.gebco.net/>). Four depth bands are defined to be mapped at different resolutions: depths 0-1500 m at 100 m spatial resolution; depths 1500 – 3000 m at 200 m resolution; depths 3000 – 5750 at 400 m resolution and 5750 – 11000 m at 800 m resolution (Mayer et al. 2018). The most recent gridded bathymetry covering all of the world's oceans is the GEBCO 2019-2020 grid produced by the Seabed 2030 project (GEBCO [Compilation Group, 2019-2020](#)). This grid is based on a depth database which 55 covers 15-19 % of the world's oceans with some sort of depth measurement, primarily from single and multibeam sonars, calculated at these specified resolutions. However, it should be noted that the GEBCO 2019-2020 grid itself is a regular geographic grid with a cell-size of 15 arc seconds.

## 1.1 Seafloor Mapping

Most of what we know about the 71 percent of Earth's surface that is covered by ocean waters has come through the mapping of the seafloor yet only approximately ~~15-19% percent~~ of the depths have been directly measured ([GEBCO 2020](#)). In recent years,

60 multibeam echo-sounders have been developed that have the ability to produce continuous high-resolution coverage over relatively wide swaths (~~something like typically~~ 4-6 times the water depth) (Theberge 1989; Wolff et al. 2019). ~~This evolution of ocean mapping technology has revolutionized our ability to produce bathymetric models and visualize seafloor bathymetry leading to much greater understanding of a range of earth and ocean processes including insights into the tectonic evolution of the earth, tsunamis, landslides and other marine geohazards, and a range of sedimentary processes. With the development of multibeam sonar~~  
65 ~~technology has come a commensurate evolution in positioning technology (GPS and GLONASS) that has allowed the depiction measurement of the bathymetry of the seafloor in a precise framework of geographic coordinates (Kumar and Moore, 2002).~~

But, as described above, to date, only a small percentage (~~on the order of 15%~~) of sonar mapping data is available to produce updated bathymetric maps of the ocean floor ([GEBCO 2019/2020](#)). Beyond the sonar coverage, for most of the oceans there are

70 virtually no direct bathymetric measurements. Instead, what is shown on global maps is predicted bathymetry derived from satellite measurements ~~of the ocean's surface of ocean surface height~~ indicating underlying bathymetry through gravity anomalies (Sandwell and Smith, 1997, Becker et al. 2009, Olsen et al. 2014). ~~Predictions predictions from sea surface height~~ are constrained by directed measurements where they exist. Although predicted bathymetry is published in a global compilation at 15 arc second resolution (approx. 463 m) (Tozer et al., 2019), the ~~minimum~~ size of features that can be resolved is actually much larger than this,

75 because it is limited by the footprint of the satellite sensors and other environmental factors such as wind and wave effects (Smith et al., 2005). Typically, features ~~no~~ smaller than 5-15 km horizontally can ~~not~~ be resolved from predicted bathymetry alone.

~~This evolution of ocean mapping technology has revolutionized our ability to produce bathymetric models and visualize seafloor bathymetry leading to much greater understanding of a range of earth and ocean processes including insights into the tectonic evolution of the earth, tsunamis, landslides and other marine geohazards, and a range of sedimentary processes. With the development of multibeam sonar technology has come a commensurate evolution in positioning technology (GPS and GLONASS) that has allowed the depiction of the bathymetry of the seafloor in a precise framework of geographic coordinates (Kumar and Moore, 2002).~~

The distribution of the Seabed 2030 resolution reflects a conservative view of the resolving ability of a modern multibeam sonar system deployed from a surface vessel operating in each of the water depth ranges (Mayer et al., 2018). Therefore, where only  
85 predicted bathymetry is available it can be stored and displayed at a lower resolution. Because of these requirements a system is needed to show data at varying resolutions, higher resolutions for shallower regions, where data exist, lower resolutions for deeper regions that have been mapped, and still lower resolutions where only predicted bathymetry exists.

The Global GGS tiling approach described herein is designed to meet the specific needs of the Seabed 2030 project ~~though can also have broader applications beyond~~. It is designed for simplicity in disseminating multi-resolution grids as specified by that  
90 project. It is also intended to support the purpose of computer graphics rendering. It is a pragmatic solution offering the advantages of regularly gridded data files for computer graphics and ease of resampling. It also offers compact file storage and the definition of all files as rectangles defined in geographic coordinates. It provides a nested hierarchy supporting data at any resolution; as such is should have uses for other projects involving the visualization of bathymetric or other geospatial gridded data beyond the specific requirements of Seabed 2030.

## 1.2 Existing grid systems

Three alternatives to the proposed Global GGS system are in common use for global bathymetry data: the geodesic-based hexagonal tiling developed by Sahr et al (2003); the Mercator projection based system of Ryan et al (2009), and; the GEBCO geographic tiling system (Weatherall et al. 2015). There are also gridding schemes designed specifically for the computer graphics

100 rendering of large gridded terrains.

The hexagonal tiling of Sahr et al. (2003) is an elegant system of overlapping hexagonal grids. Because the cells have approximately equal area it is favored by flow modelers. However, it is more complex to implement, and less space efficient in terms of storage since each point requires lat, lon and depth values. Moreover, resampling from fine meshes to coarser meshes is complex because tiles are not strictly nested at different resolutions.

105 The GMRT system of Ryan et al. (2009) is, in some ways, similar to Global GGS. It consists of a simple quadtree subdivision of the entire globe based on a Mercator projection. It differs from Global GGS in that it accommodates global coverage by maintaining 3 parallel tile sets – Mercator, South Polar, and North Polar. For the [Mercator Projectionprojected system](#), it keeps a constant number of columns, but varies the number of rows with latitude and, at a given level of binary subdivision, data grids increase in resolution with distance from the equator. GMRT makes it simple to mesh data at a given resolution within one of the projections.

110 The GEBCO [2019-2020](#) grid [provides is a geographic system providing](#) global bathymetry in geographic coordinates in a single grid at 15 arc second resolution. It is not a hierarchical system, and because the grid is constant in geographic coordinates, the spatial density of samples becomes increasingly asymmetric approaching the poles where sample spacing along lines of latitude becomes much greater than sample spacing along lines of longitude.

Hierarchical meshes and grids have been extensively used in computer graphics applications for rendering both terrains and objects.

115 Quad-trees in particular have been used for terrains. In most examples, the goal of a quad-tree rendering is for run-time rendering of perspective views so as to render fewer polygons for more distant parts of the terrain. With hierarchical block representations (Parajola and Gobetti 2007; Schneider and Westermann 2006) fixed sized grids are used (257x257 in the case of Schneider and Westermann) and these are placed in a hierarchical structure. Regular grids can be rendered very efficiently by modern computer graphics system so that even though these grids do not result in the minimum number of polygons overall, the gains in 120 rendering efficiency outweigh the increase in polygon count. In addition, grids can be very compactly stored, since, as already mentioned it is not necessary to store the locations of each vertex or information about the triangular mesh.

The goals of storage for bathymetry data are significantly different than those for rendering surface terrains. In particular, our purpose is not primarily to support multi-resolution rendering, although that might be a side benefit, but to support the specific needs of bathymetric mapping. [that due to limitations in data acquisition are often constrained by data that varies in resolution with depthmost commonly is varying in resolution by depth](#). The usual practice for block grids used in computer graphics (Schneider and Westermann, 2006) is for height values to be placed at grid vertices. In contrast, for bathymetric data it is more usual for depth values to be placed in the centers of grid cells. The value of the grid node is typically a statistical representation (mean, median, mode, etc.) of all of the soundings within a defined radius often with an inversely weighted contribution from surrounding cells.

The two schemes are equivalent in terms of network topology, but there are important implications when it comes to sampling.

130 Figure 1 illustrates this point. If points are defined at grid cell centers (a) averaging from a high resolution to a lower resolution is straightforward. The average of values within a 2x2 grid is the same as the average of the larger grid node one level up. This is not the case when heights (or depths) are placed at the vertices. Averaging the vertices shown in b1 does not result in the vertices shown in b2, rather it yields the vertices shown in b3. In this case there are no points in common between grids at different resolutions [and some form of re-averaging is needed to achieve a grid hierarchy](#). There is little difference between the two schemes 135 in terms of the complexity of stitching together adjacent grids since the meshes are topologically the same. Figure 1 (c and d)

shows the triangular meshes required to stitch adjacent grids together in the two cases. The fill strip is narrower and skewed when depths are at the centers of grid cells.

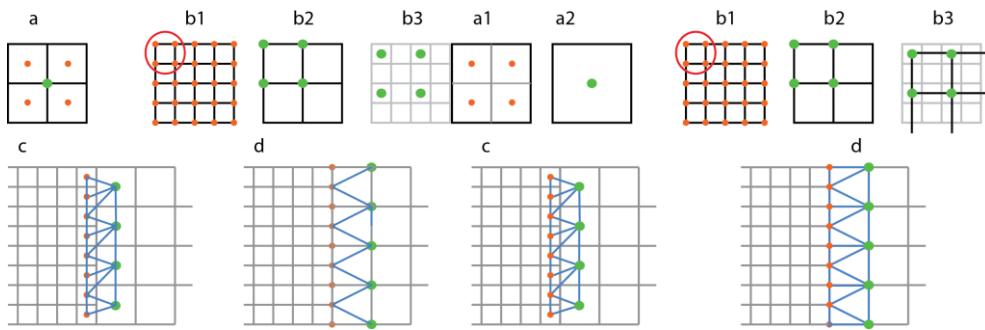


Figure 1a) when depths values placed at the centers of cells are averaged to a lower resolution, the result is also at the center of a cell (a2). b) the averages of four point-vertex groups do not lie on vertices (b2) but at the centers of grid cells (b3) so there are no common vertices between grids at different scales. c) and d) Triangle strips linking adjacent grids are topologically the same for the two schemes.

← Formatted: Caption

140 The Global GGS borrows from both GMRT and GEBCO; like GEBCO it is defined in geographic coordinates; like GMRT it  
 141 incorporates a quadtree hierarchy enabling data of any resolution to be represented. Unlike GMRT, Global GGS uses a single  
 142 scheme (and projection) to extend to the poles. Also, Global GGS avoids the extreme sampling asymmetries of GEBCO.

143 The system supports differently sized data grids in a way that is independent of resolution. It is useful to have large tiles to represent  
 144 large areas of the sea floor mapped at a constant resolution, but grids that are very large are slow to load and display and therefore  
 145 difficult to handle in most interactive display systems. Smaller grids are space efficient for areas of the seafloor mapped at different  
 150 resolutions, but numerous small grid tiles are also not efficient to render in computer graphics since large numbers of tiles must be  
 managed. For this reason, Global GGS grids are constrained in both minimum and maximum size.

155 The Global GGS also supports the seamless meshing of low-latitude data with polar data sets. Often polar data sets use a different  
 156 projection than the one used for data at lower latitudes creating difficulties in displaying data that cross the boundary. In the Global  
 160 GGS, Arctic and sub-Arctic and Antarctic and sub-Antarctic data are supported essentially in the same way.

## 2. The Global Geographic Grid System

155 The design goals for Global GGS were to create a hierarchical gridding system based on geographic coordinates and to mitigate  
 the effects of variable sampling along lines of latitude which occurs because of the convergence of meridians towards the  
 geographic poles. It also makes it easy to tie together adjacent grids having different resolutions. In addition, for conceptual  
 simplicity, it is desirable to have unit degrees as one of the possible grid sizes in the hierarchy. For this reason, a binary subdivision  
 of the entire globe was rejected.

160 The Global GGS borrows from both GMRT and GEBCO; like GEBCO it is defined in geographic coordinates; like GMRT it  
 incorporates a quad-tree hierarchy enabling data of any resolution to be represented. Unlike GMRT, Global GGS uses a single  
 scheme (and projection) to extend to the poles. Also, Global GGS avoids the extreme sampling asymmetries of GEBCO.

165 The system supports differently sized data grids in a way that is independent of resolution. It is useful to have large tiles to represent  
 large areas of the sea floor mapped at a constant resolution, but grids that are very large are slow to load and display and therefore  
 difficult to handle in most interactive display systems. Smaller grids are space efficient for areas of the seafloor mapped at different

resolutions, but numerous small grid tiles are also not efficient to render in computer graphics since large numbers of files must be managed. For this reason, Global GGS grids are constrained in both minimum and maximum size.

The Global GGS also supports the seamless meshing of low-latitude data with polar data sets. Often polar data sets use a different projection than the one used for data at lower latitudes creating difficulties in displaying data that cross the boundary. In the Global GGS, Arctic and sub-Arctic and Antarctic and sub-Antarctic data are supported essentially in the same way.

Global GGS combines a metagrid hierarchy with a system of compatible data grids. Metagrid nodes define the boundaries of data grids. Data grids are square grids of depth values, coarse grids are used to represent sparse data and finer grids are used to represent high resolution data. Both metagrids and data grids are defined in geographic coordinates to allow broad compatibility with the widest range of geospatial software packages. An important goal of the Global GGS is to support the meshing of adjacent tiles with different resolutions so as to create a seamless surface. This is accomplished by ensuring that abutting data grids either match exactly or only differ by powers of two. The oversampling of geographic data grids which occurs towards the poles is addressed by reducing the number of columns (zonal sampling) by powers of two at appropriate lines of latitude.

## **2.1 The Metagrid Structure**

The metagrid is designed to have integer degrees as a basic unit with a quadtree structure starting at 8 degrees which is the largest integer that both divides exactly into 360 and is a power of 2.

Figure 2 illustrates an example of a metagrid structure incorporating data grids of different sizes to achieve different resolutions in different regions; because this example is less than 8 deg, the metagrid has a quadtree structure. Figure 3 illustrates the global metagrid. Up to 72 deg N or S, the metagrid consists of 72x72 deg, 24x24, and 8x8 degree cells as shown in Fig. 2, with a quadtree for cells of 8x8 and smaller as shown in Figure 1; at 72 N or S, the metagrid becomes 24x8 and at 80 deg 72x8.


## **2.2 Data Grids below 60 deg N or S.**

Data grids have their row and column counts defined in powers of 2, and to support efficient tiling have both a minimum and a maximum allowable (row, column) size. Because both metagrids and data grids are defined by powers of 2 the system guarantees that abutting meshes only differ by powers of 2 in terms of resolution. This greatly simplifies the stitching of adjacent cells.


All data grid cells are defined in terms of a binary sequence of resolutions. This results in a set of fixed spacings in terms of both degrees of longitude and physical distances in a north-south direction. In the east-west direction, the width of cells varies by a maximum factor of 2 at a given level of binary subdivision. For example, at 60 deg N or S, lines of longitude have half the separation that they do at the equator.

For metagrid cells with a southern boundary < 60 deg., allowed sequences of data-grid sizes are for example: 64x64, 128x128, 256x256, 512x512, 1024x1024 (possibly also 2048x2048), or 60x60, 120x120, 240x240, 480x480, 960x960 (possibly also 1920x1920).

The latter sequence is fully compatible with the GEBCO [2019-2020](#) grid. Tying such grids together at the boundaries is straightforward and because they always differ by powers of 2. In addition, resampling of the grids (or averaging down) is also simple. The reason for not having larger grid sizes is that large files are slow to load and inefficient when a small area must be viewed. The reason for not having smaller grid sizes is that rendering many small grids has a high computational overhead. In general, small grids will be used to render small features with large depth ranges, whereas the larger grids will be used for larger areas of uniform depth; as processing power and graphics efficiency increases, the range of data-grid sizes can easily be scaled.

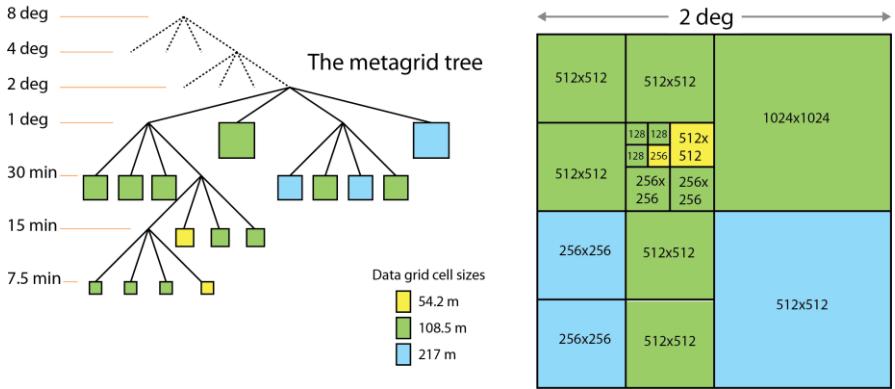

205 Figure 2. (left) An example of a quadtree metagrid tree structure with a 2 deg subsection color coded to illustrate different data grid resolutions in meters. (Note that a 960 x 960 grid subtending 1 degree ~~has~~~~would have~~ have a grid cells size of 115.7m). (right) The same subsection is shown as a map. Numbers in the square areas illustrate grid sizes used to achieve different spatial resolutions.

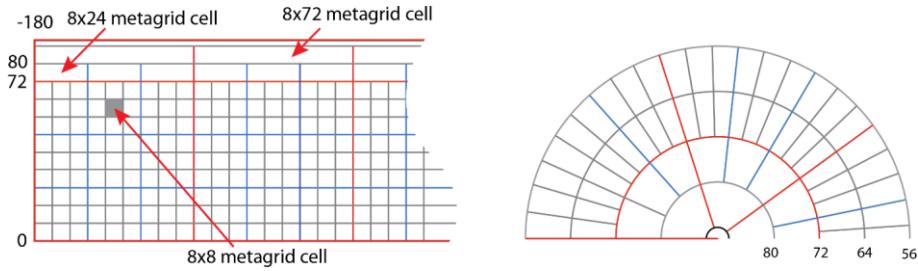

210 Figure 3. (left) The metagrid is shown above the equator. For cells 8x8 and smaller the structure is a quad-tree. (right) A polar view of the metagrid showing wider metagrid cells north of 72 deg.

### 2.3 The Arctic and Antarctic


The basic principle of polar grid construction is that the number of data grid columns *decreases* by powers of 2 as distances between lines of longitude decrease by a factor of two. This gridding concept is illustrated in Fig. 4 with grid cells greatly enlarged for clarity. The first such boundary is at 60 degrees where lines of latitude have half the spacing that they do at the equator [ $\cos(60) = 0.5$ ]. The next is at (approx.) 75.5 deg where lines of longitude half again. The third transition is above 82.8 deg where data grids have 1/8th of the number of columns per deg. relative to rows.

In addition to reducing the number of data grid columns on a per degree basis, metagrids become larger in the east west direction as illustrated in Fig. 3. This is to avoid metagrids becoming very thin trapezoids, close to the pole. They become 24x8 at 72 deg north and 72x8 at 80 deg north. North of 88 deg is a single 360x2 deg metagrid node.

220 To fit correctly within the 24x8 and 72x78 metagrid cells, data grids must be modified in such a way that they maintain the power of 2 ratio between abutting grids. Consider an example of a data grid based on a metagrid cell spanning 72 - 80 deg (lat) and 0 - 24 deg (lon). Were it not for the halving rule (north of 60) this data grid would contain 960 rows and 2880 columns, but because

of the halving principle, above 60 deg it will have 960 rows and 1440 columns. Other allowable data grid sizes for this metagrid cell are 480 x 720, 240 x 360 and 120 x 180.

225 The wide high-latitude metagrid nodes form the roots of a quadtrees that subdivide in the same way as the 8x8 quadtrees at lower latitudes. So the child nodes of a 24 x 8 deg metagrid node will be 12 x 4 deg, the grandchild nodes will be 6 x 2 deg and so on. In all cases the result is to create data grid cells where the east-west resolution is as good, or better, than the north-south resolution.

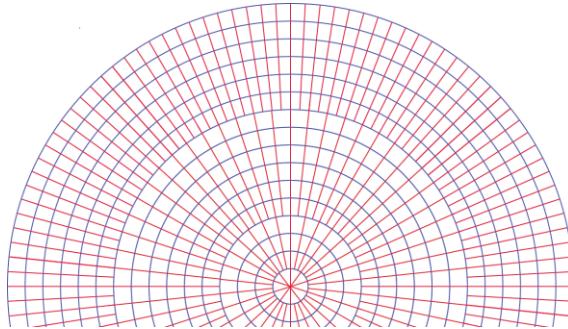

230 **Figure 4. For the polar regions the number of grid columns is reduced by two each time the spacing between lines of latitude is halved.**

#### **2.4 Depths on vertices or centers?**

Computer graphics renders polygons defined by vertices and for this reason it is conceptually simpler if depth are defined at the vertices of data grids. If depths are defined at the centers of grid cells, small offsets must be computed relative to the metagrid frame and this adds complexity. Nevertheless, as discussed in the introduction, there is an advantage to having depths at the centers 235 of data grid cells; it better supports both sampling and resampling from high resolution to low resolution grids. Global GGS can be implemented either with depths at grid centers or vertices. On balance, it is better for depths to be defined on grid centers.


#### **2.5 Compatibility with GEBCO 2019-2020 Grid**

The grid size sequence 60x60, 120x120, 240x240, 480x480, 960x960 is fully compatible with the GEBCO [2019-2020](#) 15 arc second grid. This corresponds, for example to a 960x960 grid within a 4 deg metagrid node (or 240x240 within a 1 deg metagrid 240 node). More generally it is compatible with grid spacings in the series 30, 15, 7.5, 3.75 ... arc seconds which correspond to 925.9, 462.9, 231.5, 115.7 ... meters at the equator.

### **3. Implementation**

The following sections describe a proof-of-concept implementation of the Global GGS. Source code is provided in a BitBucket repository (<https://bitbucket.org/ccomjhc/globalggs/>). The implementation was done in C++ and OpenGL and uses glut to provide 245 a GUI for the test driver. Naturally, it could be implemented in any programming language and there are many possible variations, some of which we discuss in a later section. In this description, we provide the main C++ classes and methods. Details relating to such things as shading and color-mapping are omitted since they are peripheral, but they are provided in the form of source code in supplementary material.

250 The implementation is driven by a Lat, Lon reference point. This causes the `loadData` method to load a set of files within a specified  
 distance from this point. On loading, all coordinates are converted to positions relative to the reference. The use of relative positions  
 has the important benefit that coordinates can be stored as single, as opposed to double precision floats, substantially reducing the  
 memory load.

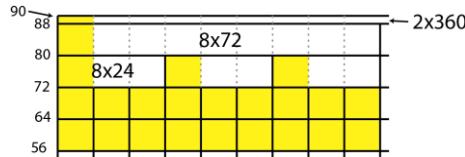


255 **Figure 5.** The larger root nodes North and South of 72 deg. are implicit. Only the nodes colored yellow contain pointers to metaGrid  
 sub-trees

### 3.1 The GGGSroot Class

260 The GGGS root class is an implementation of the top level grid illustrated in Fig. 3. The main data structure is a two dimensional  
 (24 x 45) array of pointers to 8 deg x 8 deg metagrid nodes. The grid has a Longitude range of (-180, 180) deg. The Latitude range  
 of the array extends beyond the poles, from -96.0 to 96 deg. This ensures a grid boundary at the equator but means that the first  
 and last rows only contain 2 degrees of data. The nodes approaching the equator have extended widths (8x24, 8x72, 2x360 deg.).  
 However, these are implicit as illustrated in Fig. 5 and maintained by the accessor functions.

The implementation relies on pre-prepared data grid files with grids that are computed as described in the first part of the document.

There are three public methods in the GGGSroot class. `loadData`, `draw`, and `loadColorMaps`.

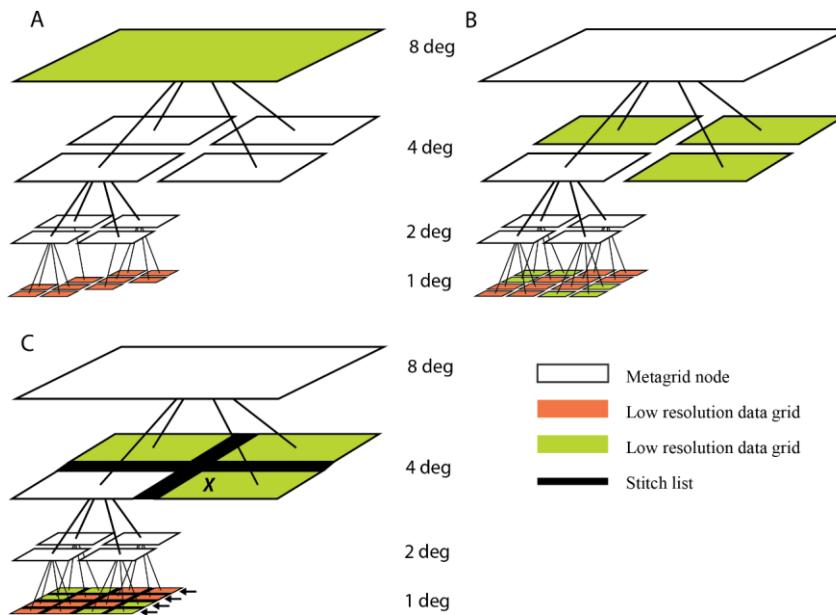

265

| **Figure 6** Steps in the construction of a seamless mesh from multi-resolution files -A) The structure after the data have been loaded. B)  
 The structure following PushDown. C) Following StitchList construction.

```
269 loadData(float Lat, float Lon, float width, float height)
```

The loadData method takes in a *Lat, Lon* reference point as well as a width (in Longitude degrees) and a height (in Latitude degrees). Its main function is to sequence various operations carried out by the *metaGridNode* class. These are listed here then described in more detail in the descriptions of *metaGridNode* methods.

- 270 1. loadData first instantiates a set of *metaGridNode* objects covering the specified ranges.
- 275 2. loadData inserts the top level 8x8 (or in polar regions: 8x24, 8x72 2 x 360) deg. data files covering the specified range. For this implementation low resolution 8x8 data grids are required to exist for all top level *metaGrid* nodes.
- 280 3. Within the boundaries of each *metaGridNode* the entire set of file names for 1x1 (or in polar regions: 1x3, 1x9, or 1x45) deg. nodes are constructed. Their existence is tested the filenames for those that exist are passed to the *metaGridNode*. An alternative approach would be to have a list of files available for insertion based on a pre-defined scene file. Figure 6(A) shows an example tree following data insertion.
- 285 4. For each top level *metaGridNode* the *pushDown* method is called. This recursively splits the top level metagrid node into parts to fill in around the detail nodes in the *metaGridNode* tree. Figure 6(B) shows an example tree following this operation.
- 290 5. For each top level node a *linkSibs* metagrid method is called. This recursively threads the tree, linking pointers between nodes at every level. At every level it is the parents responsibility to provide each child node with pointers to their siblings.
6. For each top level *metaGridNode* a *walkBuildStrips()* method is called. The purpose of this is to build *stitchLists* for every data grid node which will be displayed. A *stitchList* is an array of arrays containing the data points of the nodes adjoining the east, west, north and south edges of a displayable data node. *stitchLists* are needed to fill the strips between data grids with polygons. Figure 6(C) shows an example tree following this operation.
7. Special *stitchLists* are constructed for the boundaries at 72 and 80 degrees if these boundaries lie within the specified *Lat, Lon* data ranges.

```
295 draw(bool lores)
```

The draw method calls the root *metaGridNodes* which then traverse the heirarchical *metaGridNode* trees and draws both the data grids and their associated *stitchLists*. The draw method has a single boolean parameter. If set to true rendering is done at lower resolution. This is useful for interactively changing the view of the data.

```
300 loadColorMaps()
```

The *loadColorMaps* method loads multiple colormaps so that attributes of the data sets can be color coded.

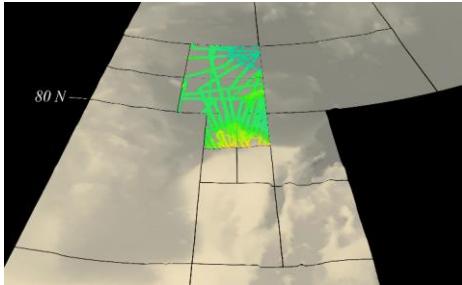


Figure 7 Data Tiles north and south of 80 deg.

### 3.2 The *metaGridNode* Class

305 *metaGridNode* implements the quad-tree heirarchy, a signature feature of the Global GGS. Each metagrid node has four pointers to children which are also metaGrid Nodes. Each node also has pointers to sibling nodes to the east, west, north and south. The following sections describe the functions of the most important class methods.

```
bool insertChild(char *fname, double focusLat, double focusLon,
                 int childC, int childR, int depth, int Tdepth);
```

310 The *insertChild* method is passed a file name, the focus *Lat*, *Lon* coordinates, depth of insertion, and the current depth within the *metaGridNode* tree. The childC and childR parameters tell it which (of four) children it is, relative to its parent.

*insertChild* builds the *metaGridNode* tree down to the level at which the dataFile should be inserted. Once that level is reached the *bathyGrid* method is given the responsibility of opening and loading the data file. Figure 7 shows an example which crosses the 80 deg boundary.

315

```
pushDown(int depth);
```


*pushDown* is a recursive method which takes any node that both contains a *bathyGrid* and has children. It passes down a pointer to the *bathyGrid* to all of its child nodes using the *insertDtmQuadrant* method. These child nodes extract the *bathyGridNode* quadrant corresponding to their geographic extent and copy the data into a new *bathyGrid* node. This is recursively repeated to the 320 lowest level in the heirarchy. The purposes is to fill in around high resolution nodes which have been inserted. Figure 6(B) illustrates the result as a tree diagrams. Figure 8 gives an example.

```
insertDtmQuadrant(bathyGrid *ddtm, int child)
```

*insertDtmQuadrant* is passed an instance of a *bathyGrid*, together with information about which (of four) children it is, relative to its parent. It uses this information to create a new *bathyGrid* using the aproapriate quadrant of the *bathyGrid*.

325 *dtmQuadrantMerge* (*bathyGrid* \*ddtm, int child)

For this implementation there is an additional *dtmQuadrantMerge* function with is called when the traversal reaches a leaf node. The one degree data grids in this application only contain valid bathymetry, where multibeam surveying has been done, otherwise they are empty. *dtmQuadrantMerge* is used where leaf nodes contain multibeam bathymetry. In these cases, the low resolution *bathyGrid* is interpolated to fill the missing values as illustrated in Fig. 8.

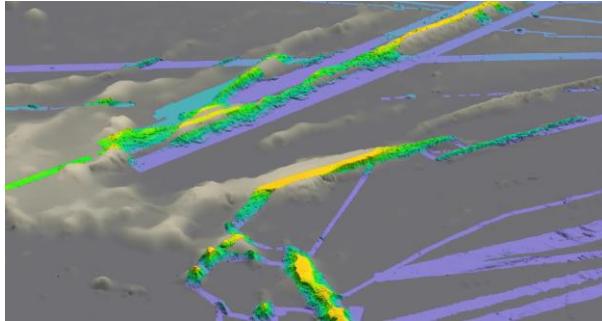

330

Figure 8. In this example, a low resolution grid has been used to fill in around a high resolution multibeam data. Two colormaps are used with a highly saturated colors being used to highlight multibeam data.

```
linkSibs(int mg8Lat,metaGridNode *sE,metaGridNode *sW,metaGridNode *sN,
metaGridNode *sS);
```

335 *LinkSibs* is a recursive method that walks the tree connecting sibling pointers to adjacent metaGridNodes at each level. It is the parents responsibility to give each child pointers to its siblings.

```
buildStitchLists()
```

*buildStitchLists* is responsible for building a data structure required to fill the gaps between adjacent nodes with strips of polygons. The method creates and populates a data structure which is a list of lists. Stitch lists are only required where larger nodes are

340 adjacent to a set of smaller nodes along one of the edges and they are only built for leaf nodes (that have no children). An example is given in Fig. 6 where the node marked with an X will have a stitch list along it's western edge containing the data points from the extern boundaries of the four nodes indicated by arrow.

For leaf nodes, *buildStitchLists* checks the east, west, north and south neighbors. If they exist, then a stitch list is constructed, by asking that neighbor to fill in the data points for the appropriate edge. If a neighbor is not a leaf node this involves recursively 345 traversing the neighbors sub tree. For example, building a stitch list for the west edge of node X in Fig. 6(C) involves obtaining a list of the data grid values along the east edges of the leaf nodes indicated by arrows.

### 3.3 The bathyGrid Class

*bathyGrid* nodes load and store load data from bathymetry files, computes surface normals, and renders the data. For this implementation *Lat*, *Lon* coordinates are transformed by rotations into a planar orthographic projection centered on the focus 350 coordinates (Fig. 9). Because all coordinates are stored as offsets from the focus coordinates and this means that single precision floating point numbers can be used internally. On loading a data grid, *Lat*, *Lon* coordinates are constructed for the centers of all grid points based on the lower left coordinate of a data grid, the grid size, and the number of rows and columns.

```
computeXYfromLatLon(double focLat,float focLon, float rLat,bool print)
```

These coordinates are transformed to x,y coordinates on a plane tangential to the surface at the reference point. This is achieved 355 by rotating the absolute latitude and relative longitude values about an axis through the equator. This yields x,y coordinates for each of the DEM points as illustrated in Fig. 9.

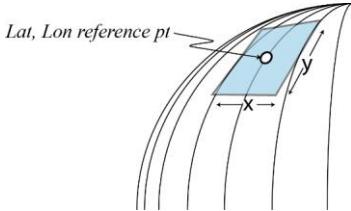


Figure 9 Bathymetric values are represented relative to a tangent plan with and orthographic projection of Lat, Lon positions

#### 4. Conclusions

360 Perhaps the most important practical implication of Global GGS is that it constrains a set of dissemination grids. In order for the system to be efficiently implemented these must be defined at a series of resolutions given by binary subdivisions of degrees as prescribed. In the ideal situation, data grids will be derived directly from primary data sources such as bathymetric measurements from multibeam mapping systems. However, in many cases it is inevitable that resampling from existing grids will be necessary. Although Global GGS prescribes the grid spacings, it is agnostic as to the format of data grid files. In the implementation provided

365 in supplementary material, bathymetry is encoded compactly using png files, but geotiffs, netcdf files or any other gridded format could serve the purpose. Also, there are other variants in file format which could be implemented within the Global GGS concept. For example, adding additional rows and columns to grid boundaries which duplicate the boundaries of adjacent grids, could facilitate the rendering of seamless tiling<sup>s</sup> where a single resolution is involved.

One of the less than desirable qualities of Global GGS is non-square grid cells. In Global GGS data grids can have variable aspect

370 ratios between 1.0 and 2.0 depending on latitude. However, where the aspect ratios are higher, this represents an oversampling in terms of longitude, never an under sampling. A simple modification could be used to ensure that the aspect ratio never exceeds the square root of two (1.4142). This can be achieved by changing the latitudes at which the number of columns is decreased. For example, instead of the first such transition occurring at 60 deg. of latitude it would occur at 45 deg. But this modification would also have a cost in that sometimes longitude would be oversampled with respect to latitude and sometimes the converse.

375 There are many alternative ways in which Global GGS could be implemented either as a desktop or web-based application. The specific implementation given here is provided only as a working example. Some aspects of it are more general than others. The way the tree is built, as files are inserted, would be a necessary part of any implementation. The pushdown function is also needed to fill around high resolution data with lower resolution data. Some form of threading between adjacent nodes will be needed in order to provide links necessary to create seamless polygon meshes at the boundaries between data grids, especially those having

380 different resolutions. Other aspects of the implementation are open to many alternatives. The specific way that the boundary links are constructed using *stitchLists* is just one possibility.

For many applications the implementation of scene files would be a useful enhancement. These could specify an assemblage of data grid files and attribute files, together with rendering attributes such as colormaps, viewpoint, height exaggeration and illumination.

385 As discussed in the introduction, the use of small tiles has the advantage that they can be loaded rapidly for interactive applications especially over the internet. Small grids are also beneficial where the resolution at which the seafloor has been mapped is highly variable, as is often the case for bathymetric data, especially where the data has been acquired to support science rather than standardized surveys conducted by hydrographic agencies. Smaller files lead to efficient rendering by reducing the number of polygons for terrains where only isolated areas have high resolution data. But there are circumstances where larger tiles may be

390 more beneficial, especially where larger areas with limited relief have been uniformly mapped. With some storage schemes rapid loading need not be compromised by large file sizes. For example, netcdf files, allow for rapidly loading subsets of the data within a file without the whole file being read.

The original motivation for Global GGS came from the Seabed 2030 project and its need for multi-resolution grids which requires a method capable of handling multiple resolutions in a seamless mesh. However, different resolutions were also specified as a  
395 *minimum* requirement, meaning that higher resolutions could eventually be accepted and making it desirable to design a system that can support any resolution. Global GGS meets this requirement and can support the visualization of grids at any resolution. As such Global GGS may also prove to be an efficient approach to the representation of any single or multiresolution globally distributed three-dimensional geospatial data set.

#### 400 **Code Availability**

Example code is available in a bit bucket repository <https://bitbucket.org/ccomjhc/globalggs>

Note that the concepts in this paper are more general than those expressed in the code which represents a proof-of-concept implementation. There are many possible implementations of Global GGS and many useful variants.

#### 405 **Data Availability**

A small amount of sample data is available in the same bit bucket repository <https://bitbucket.org/ccomjhc/globalggs>

#### **Acknowledgements**

This work was supported by NOAA Grant NA15N0S400200 to the Center for Coastal and Ocean Mapping, UNH (Mayer PI and Ware Co-PI).

410

#### **References**

Becker, J. J., Sandwell, D. T., Smith, W. H. F., Braud, J., Binder, B., Depner, J., ... & Ladner, R. Global bathymetry and elevation data at 30 arc seconds resolution: SRTM30\_PLUS. *Marine Geodesy*, 32(4), 355-371. 2009.

GEBCO Compilation Group (2019-2020), GEBCO 2019-2020 Grid, edited by The Nippon Foundation-GEBCO-Seabed 2030  
415 project. doi: [10.5285/a29c5465-b138-234d-e053-6c86abc040b910.5285/836f016a-33be-6dde-e053-6e86abe0788e](https://doi.org/10.5285/a29c5465-b138-234d-e053-6c86abc040b910.5285/836f016a-33be-6dde-e053-6e86abe0788e)

Kumar, S., and Moore, K. B., The Evolution of Global Positioning System (GPS) Technology: J. Science Education and Technology, v. 11, no. 1, 59-80. 2002.

Li, Z.: Digital Terrain Modeling: Principles and Methodology, 1st Edn., CRC Press, Boca Raton, 323 pp., 2004.

Lindstrom, P., Koller, D., Hodges, L. F., Ribarsky, W., Faust, N. L., & Turner, G. Real-time continuous level-of-detail rendering  
420 of height fields. Proc. SIGGRAPH 96, 109-118. ACM. 1996.

Mayer, L., Jakobsson, M., Allen, G., Dorschel, B., Falconer, R., Ferrini, V., Lamarche, G., Snaith, H. and Weatherall, P. The Nippon Foundation—GEBCO seabed 2030 project: The quest to see the world’s oceans completely mapped by 2030. *Geosciences*, 8(2), 63. 2018.

McPhail, C. K. Reconstructing Eratosthenes' Map of the World: A Study in Source Analysis (Doctoral dissertation, University of  
425 Otago). 2011.

Olson, C. J., Becker, J. J., & Sandwell, D. T. A new global bathymetry map at 15 arcsecond resolution for resolving seafloor fabric: SRTM15\_PLUS. In AGU Fall Meeting Abstracts. 2014, December.

Pajarola, R. Large scale terrain visualization using the restricted quadtree triangulation. In Proceedings Visualization '98 (pp. 19-26). IEEE. 1998.

430 Pajarola, R., & Gobbetti, E. Survey of semi-regular multiresolution models for interactive terrain rendering. *The Visual Computer*, 23(8), 583-605. 2007.

Ryan, W.B., Carbotte, S.M., Coplan, J.O., O'Hara, S., Melkonian, A., Arko, R., Weissel, R.A., Ferrini, V., Goodwillie, A., Nitsche, F. and Bonczkowski, J., Global multi-resolution topography synthesis. *Geochemistry, Geophysics, Geosystems*, 10(3). 2009.

Sahr, K., White, D., & Kimerling, A. J. Geodesic discrete global grid systems. *Cartography and Geographic Information Science*, 435 30(2), 121-134. 2003.

Theberge, A. E. Sounding pole to sea beam, in Paper Presented at the 1989 ASPRS/ACSM Annual Convention Surveying and Cartography, (Silver Spring, MD: NOAA Central Library), 334–346. 1989.

Tozer, B. , D. T. Sandwell, W. H. F. Smith, C. Olson, J. R. Beale, and P. Wessel, Global bathymetry and topography at 15 arc seconds: SRTM15+, Accepted Earth and Space Science, August 3, 2019.

440 Schneider, J., & Westermann, R. GPU-friendly high-quality terrain rendering. *J. World Soc. For Computer Graphics* 14(1-3) 49-56. 2006.

Weatherall, P., Marks, K.M., Jakobsson, M., Schmitt, T., Tani, S., Arndt, J.E., Rovere, M., Chayes, D., Ferrini, V. and Wigley, R., A new digital bathymetric model of the world's oceans. *Earth and Space Science*, 2(8), 331-345. 2015.

Smith, W. H. F., and D. T. Sandwell , Global seafloor topography from satellite altimetry and ship depth soundings, *Science*, 277, 445 1957-1962, doi:<https://doi.org/10.1126/science.277.5334>. 1997.

Smith, W. H. F., D. T. Sandwell, and R. K. Raney (2005), Bathymetry from satellite altimetry: present and future, paper presented at Proceedings of OCEANS 2005 MTS/IEEE, 17-23 Sept. 2005.

Wölfel, A.-C., Snaith, H., Amirebrahimi, S., Devey, C. W., Dorschel, B., Ferrini, V., Huvenne, V. A. I., Jakobsson, M., Jencks, J., Johnston, G., Lamarche, G., Mayer, L., Millar, D., Pedersen, T. H., Picard, K., Reitz, A., Schmitt, T., Visbeck, M., Weatherall, P., 450 and Wigley, R., Seafloor Mapping – The Challenge of a Truly Global Ocean Bathymetry: *Frontiers in Marine Science*, v. 6, no. 283. 2019.