

# Wind Speed Influences Corrected Autocalibrated Soil Evapo- respiration Chamber (ASERC) Evaporation Measures.

Bartosz M. Zawilski

5 CESBIO Université de Toulouse, CNES, CNRS, INRA, IRD, UPS, Toulouse, 31000 France

*Correspondence to:* Bartosz M. Zawilski (zawilskib@cesbio.cnes.fr)

**Abstract.** Soil evaporation concerns water, and our life supports sources that are important for agriculture or for climate change prediction science. A simple instrument based on the nonsteady state (NSS) technique for soil evaporation measurement appears suitable. However, because the NSS chamber technique is highly invasive, special care should be provided to correct the wind speed influence on the evaporation process. Soil evaporation is a complex process that involves many soil and air characteristics. Measurement chamber installation on the soil and its head deployment may perturb these characteristics. We then had to minimize differences or to correct the measurements. Most of the differences between bare soil and soil with a deployed chamber head can be minimized except for the wind speed influences that are not reproducible inside a chamber head. Meanwhile, as the wind influences depend on numerous and not real-time monitorable variables, to make the measurements easily corrigible on bare soil with a unique variable, wind speed ( $W_s$ ), regardless of the soil composition, soil texture, and other soil or air meteorological variables, a self-calibrating chamber with a corresponding protocol called the Autocalibrated Soil Evaporespiration Chamber (ASERC) was developed. A simple protocol followed by this chamber allows us to determine the soil evaporation wind speed susceptibility ( $Z$ ) and to correct the measurements achieving 0.95 as the coefficient of determination. Some interesting findings on sandy and clayey soil evaporation measured during laboratory calibration and “slow” sensor simulation will also be reported in the two appendices.

## Frequently used acronyms and units if applicable.

AEV: Air Entry Value

ASERC: Auto-calibrated Soil Evapo-Respiration Chamber

25 CAEV: Cracking Air Entry Value

CP: Common Point

ER: Exponential Rise

IR: Infra-Red

IRGA: Infra-Red Gas Analyzer

- 30  $m(W_s)$ : correction factor depending on wind speed.  
 $M$ : Measurement average multiplied by  $Z$  ( $\text{gm}^{-2}\text{s}^{-1}$ )  
 $M_x$ : Measurement with PWM= $x\%$  ( $\text{gm}^{-2}\text{s}^{-1}$ )  
 $M_{10-30}$ : Average of the measurement with PWM=10% and measurement with PWM=30%  
 $M_B$ : bucket with soil mass (g)
- 35  $M_0$ : bucket with dry soil mas (g)  
 $M_s$ : dry soil mass (g)  
MAEV: Matrix Air Entry Value  
 $ME$ : Measured Evaporation ( $\text{gm}^{-2}\text{s}^{-1}$ )  
NDIR: Non-Dispersive Infra-Red
- 40 NSS: non-steady state  
 $P$ : Water vapor Production ( $\text{gm}^{-2}\text{s}^{-1}$ )  
PTFE: Polytetrafluoroethylene  
PU: polyurethane  
PWM: Pulse Wide Modulation (unitless and expressed in %)
- 45  $q$ : Absolute air humidity ( $\text{gm}^{-3}$ )  
 $R^2$ : coefficient of determination  
 $RE$ : Real Evaporation ( $\text{gm}^{-2}\text{s}^{-1}$ )  
RH: relative air moisture (unitless but expressed in %)  
 $S$ : Soil water vapor Stock ( $\text{gm}^{-2}$ )
- 50 SWC: Soil Water Content  
 $T_a$ : Air temperature ( $^{\circ}\text{C}$ )  
 $\tau_{63}$ : Response Time (time necessary to reach 63% of final signal) (s)  
 $W$ : Gravimetric soil water content (unitless expressed in %)  
 $W_s$ : Wind speed (m/s)
- 55  $Z$ : soil evaporation wind susceptibility (unitless and expressed in %)  
 $Z_{10-30}$ :  $Z$  calculated using only two measurements with PWM=10% and PWM=30%  
 $Z_{total}$ :  $Z$  calculated using all ten measurements with PWM from 10 to 100% (step 10%).

**Introduction.** In the context of rising global temperature, as water is our main life support key resource for food production, and water vapor is one of the most abundant greenhouse gases in the Earth's atmosphere, it is important to gather knowledge about soil evaporation. Soil evaporation may be a major soil moisture loss source. On the one hand, the global direct soil evaporative annual precipitation losses are as high as 20%, and the other 40% of precipitation losses are due to vegetation transpiration (Oki and Kanae 2006). In arid and semiarid regions, soil evaporation may reach up to 75% of the precipitation

(Riou, 1997) when total soil evaporation along with vegetation transpiration, so-called evapotranspiration, may dissipate up to 65 90% of the annual precipitation (Pilgrim et al., 1988; Wilcox et al., 2003). On the other hand, soil evaporation consumes approximately 20% of solar radiation energy (Trenberth et al., 2006). Energy absorbed on the soil surface or in the soil subsurface during the evaporation process, lowering soil temperature, is released later in the higher atmosphere layer when condensing, warming up the air. Water vapor is the most important greenhouse gas in the atmosphere not because of its efficiency but because it is the most abundant; 60% of the total greenhouse effect (Trenberth et al., 2009, Schmidt et al., 2010) 70 and its recently measured upper-tropospheric concentration increase are directly attributable to human activities (Choung et al. 2014). Good et al. (2015) showed that the main water vapor source (65%) was the soil surface, not the water surface. Water vapor effluxes are commonly measured using different techniques. The widely used eddy covariance technique is a relatively expensive but minimally invasive way to estimate soil evaporation on bare soil and other trace gas fluxes. This technique consists of a high-frequency air analysis, typically by a nondispersive infrared (NDIR) or infrared gas analyzer 75 (IRGA) at 10 or 20 Hz along with a high-frequency air velocity measurement by an ultrasonic anemometer. From these measurements, a covariance is deduced that allows us to compute the trace gas fluxes. As with every measurement technique, eddy covariance has its pros and cons. Eddy covariance provides evaporation estimation when the air flow is turbulent enough, which means only when the wind is strong enough, which is usually not the case at night. Additionally, these measurements are not precisely localized, and the provenance is approximative. This point is often a force since the measurements reflect the 80 mean process but not when a precise provenance is sought after. However, eddy covariance cannot be implemented everywhere. The site should be flat and big enough (please see the book edited by Aubinet et al. (2012), an eddy covariance-dedicated book which describes this technique and its requirements from a practical point of view). Additionally, a systemic underestimation of eddy covariance CO<sub>2</sub> flux compared to closed-chamber technique measured fluxes was pointed out by numerous authors (Goulden et al., 1996; Norman et al., 1997; Law et al., 1999; Hollinger et al., 1999; Janssens et al., 2000; 85 Pavelka et al., 2007; Zha et al., 2007; Myklebust et al., 2008; Schrier-Uijl et al., 2010). Nevertheless, we must keep in mind that chamber measurements have to be carefully considered and, in the same way as for evaporation, other gas efflux measurements have to be corrected versus the wind speed. Under calm conditions, due to internal fan perturbations, closed chambers may have a tendency to overestimate possible soil efflux (Schneider et al., 2009; Brændholt et al., 2017). In the case of the presence of vegetation, to separate transpiration from soil evaporation, an experimental isotopic mass balance 90 approach can be adopted (Ferretti et al., 2003). This technique requires frequent air sampling and laboratory analysis or expensive and voluminous analyzer use. Eddy covariance measurements give total (soil evaporation and vegetation transpiration) evapotranspiration. Coupled with partitioning according to a model (see Koola et al. (2014) for a review), a separation of soil and vegetation contributions is possible. Each specific model may be accurate but only for a specific plant, making it difficult to apply the model to a mixed plant cover. Moreover, even for a specific plant, there are numerous models 95 giving different results. For maize, there are over 29 models (Kimball et al., 2019). Additionally, each model requires more or less numerous variable injections, which make some models difficult to apply since the required variables are not known (Kustas and Agam, 2014).

Another widely used technique for direct soil evaporation measurements is lysimeters from microlysimeters for bare soil evaporation measurements to large-scale lysimeters to measure the total evapotranspiration (listed by Liu et al. 2002.). This technique consists roughly of weighing a hold soil colon, giving a direct evaporation or evapotranspiration measurement if the surface of the soil colon is large enough to hold supplementary vegetation. However, this apparatus should be deeply buried, making this measurement relatively hard to implement, especially when frequent apparatus displacements are necessary, as is the case on an agricultural plot (tillage and other soil operations). Lysimeters also require deep enough soil, which is not the case with the presence of shallow rock and even simple stones, and provide a timely averaged measurement because the weight variation caused by water evaporation needs to be important enough compared to the total enclosed soil weight.

Relatively recently, a heat balance-based method using heat pulse probes was proposed by Sauer et al. (2007) and Heitman et al. (2008 and 2017). This technique assumes that the heat budget disclosure is due only to water evaporation and allows measurements only in the subsurface, leaving surface evaporation unmeasurable. However, this technique is the only technique that allows us to track subsurface evaporation with depth.

Therefore, an exclusive, fast and easy-to-implement bare soil evaporation measurement is suitable. A dynamic closed nonsteady state (NSS) technique used for soil trace gas efflux measurements may also be used for soil evaporation assessment. However, for these measurements, probably more than for other soil efflux measurements, measured data must be carefully corrected. Indeed, this technique is not a direct measurement and is highly invasive. Not only may the collar inserted into the soil perturb the compartment of the enclosed soil by root shearing (Heinemeyer et al., 2011), thereby limiting the autotrophic component of the respiration, but the chamber presence and also more particularly during the chamber head deployment with the enclosed part of the soil isolation from the exterior meteorological conditions such as the wind perturbs the compartment of the enclosed soil (see Rochette et al., 1997; Rochette and Hutchinson, 2005 for chamber technique description). Notably, motivated by the measurement of the soil surface energy budget imbalance and a probable subsurface evaporation contribution, a simple and versatile soil evaporation measurement instrument was developed. Based on an automatic nonsteady state (NSS) chamber technique, special attention is given to solar radiation heating, pressure variation preservation and wind speed influence. Chamber construction and its characteristics, the developed protocol for evaporation calculations and the developed calculation algorithms are reported. Wind speed influence is different on sandy and clayey soil, which could be explained by bay soil water vapor sorption and will be discussed along with unexpected inertia behavior. The latter phenomena require some precautions but allow us to assess the chamber head air mixing time. Finally, the wind speed influence correction function is presented.

This study is based on over 1000 measurement cycles (that is, over 10 000 chamber deployments over two years) and, after calibration of the wind speed influence on the evaporation and chamber perturbation correction, shows reasonable agreement between chamber measurements and real evaporation with  $R^2 > 0.95$ . The same correction formula is used for sandy and clayey soils regardless of the soil moisture.

## 130 **1 Wind influence considerations**

The wind influence on soil water vapor efflux is well known and widely studied (Thornthwaite and Holzman, 1942; Hanks and Woodruff, 1958). Even if a nondiffusive regime for a soil evaporation process were explored more than a half century ago (Fukuda, 1955), considering a gusty wind influence from the theoretical point of view by a sinusoidal representation, concluding with a negligibility of the phenomenon, other authors studied and experimented with wind-influenced evaporation  
135 (Farrell et al., 1966; Scotter and Raats, 1968) and concluded, on the contrary, that a nondiffusive regime had great importance. Recently, numerous authors experimentally and theoretically studying gas propagation in porous media have pointed out an important or even the largest role of nondiffusive regimes, such as thermal and solutal dispersion (Davarzani et al., 2014), convection and advection or pressure fluctuations for gas movement through porous media (soil); see Sánchez-Cañete et al. (2016) and the references given there. One of the major gas movement causes is *wind pumping*, which includes three effects:

- 140 - The Venturi effect (Xu et al., 2005; Bain et al., 2005; Suleau et al., 2009) gives rise to mass transfer by establishing a pressure gradient.
- Natural gradient concentration disturbances (Le Dantec et al., 1999; Longdoz et al., 2000; Lai et al., 2012) play an important role during very calm conditions, and a highly stratified boundary layer slows the diffusion efflux and, once disturbed by the head space mixing fan, releases an unusual high apparent efflux.
- 145 - Eddy pressure fluctuations cause gas dispersion (Maier et al., 2010; Mohr et al., 2016; Brændholt et al., 2017; Pourbakhtiar et al., 2017; Poulsen et al., 2017; Mohr et al., 2017), which may be a very important gas transport regime. This effect is more or less screened by chamber deployment, depending mainly on the wind importance versus the internal head air mixing fan disturbances.

150 All these effects may be altered by a deployed chamber head and then affect the closed chamber measurements versus natural soil efflux. As the wind cannot be reproduced inside the chamber heads, the only possibility is to minimize the differences and to correct the data by calibrating the measurements versus the wind speed, which is the aim of this paper in presenting an adapted nonsteady state dynamic chamber technique and wind speed corrected for the water vapor efflux measurement.

The wind characteristics, such as friction velocity, have a very important influence on evaporation, contributing to evaporating  
155 water vapor from the boundary layer and maintaining a low ambient air humidity (Monin-Obukhov similarity theory, see, for example, Hill, 1989). Then, as the water demand is still high (water vapor demand) is complementary to relative humidity (*RH*), water vapor production is consequent. If the air humidity is high, with or without important friction velocity, the soil evaporation is low. Turbulence (quantified by friction velocity) has a great influence on air humidity (quantified by water vapor demand), which has a great influence on soil evaporation. As described in further sections of this paper, the chamber  
160 operation protocol is optimized for initial air humidity preservation, preserving the initial water vapor demand. Consequently, one can reasonably assume that the chamber measurements do not have to be corrected versus the air water vapor transport ability (friction velocity).


Another consequence of the presence of turbulence is pressure oscillations. As the chamber head includes an expansion room equalizing pressures between the deployed chamber head internal volume and the exterior pressure, there is no special  
165 correction to perform for the pressure fluctuations.

The only pertinent wind characteristic that appears to be important but not preserved is the wind speed.

## 2 Materials and methods

### 2.1 Chamber construction

The chamber described later in this paper was constructed in the laboratory (please see Fig. 01).

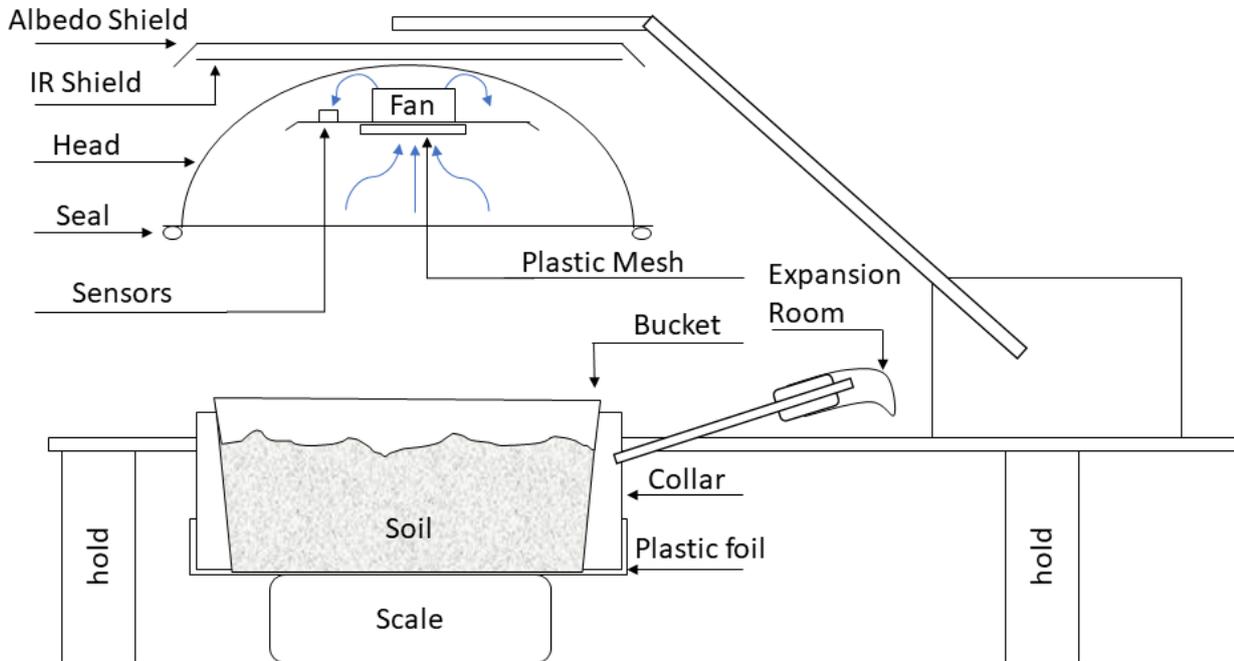

170

**Figure 01: Scheme of the chamber and experimental setup. In this sketch, the chamber head is not deployed.**

When the chamber head is deployed, the cloche with embedded fan is firmly put down on the base insulating the collar with the bucket and a well delimited air volume. Inside this finite air volume, due to soil evaporation, the relative air moisture  $RH$  will rise more or less quickly up to the saturation value, which is important depending on the soil matrix suction.

The internal fan, which is the core of the device, is a Maglev fan PSD1204 PKB 3-A 40 mmx40 mmx20 mm (Sunonwealth Electric Machine Industry Company Limited, Qianzhen, District Kaohsiung, Taiwan) with pulse width modulation (PWM) control and rotation sensor driven by a generic PWM generator able to generate a signal of a given frequency and a given duty on demand, communicating with a datalogger (CR1000 from Campbell Scientific, Logan, UT, USA) by a UART TTL bus.

The main humidity sensor (because there were three humidity sensors of different response time for comparison) is a P14

180

Rapid mounted on a Linpicco plate with a PT1000 sensor for simultaneous humidity and temperature measurements (Innovative Sensor Technology IST AG, Ebnet-Kappel, Switzerland). The pressure, temperature and humidity inside the chamber head were monitored using a BME280 (Bosch Sensortec GmbH, Reutlingen, Germany) digital sensor under an  
 185 Arduino-Uno control (I<sup>2</sup>C bus) forwarding these measures to the main data logger CR1000 via UART, TTL bus. The fan, mounted on a holding plate along with all the sensors, aspirated the air from the bottom of the chamber head through a plastic mesh (opening percentage 47%). The digital scale used was a WA30002Y from W&J Instrument Co., Ltd., Mudu Jiangsu, China, with a continuous RS-232 bus output and 0.01 g resolution.

The NSS technique has been known for  $M_B w = \frac{(M_B - M_0) dC}{M_s dt} = k(C_l - C)C(t) = Ae^{-kt} + BC(t) = C_l - (C_l -$   
 190  $w = \frac{(M_B - M_0) dC}{M_s dt} = k(C_l - C)C(t) = Ae^{-kt} + BC(t) = C_l - (C_l - C_0)e^{-t/\tau}$  almost

$$\frac{dC}{dt} = k(C_l - C)C(t) = Ae^{-kt} + BC(t) = C_l - (C_l - C_0)e^{-t/\tau} \text{ almost}$$

$$C(t) = Ae^{-kt} + BC(t) = C_l - (C_l - C_0)e^{-t/\tau} \text{ almost}$$

$$C(t) = C_l - (C_l - C_0)e^{-t/\tau} \text{ almost}$$

- Respiration Chambers: Pavelka et al. (2018),
- 195 - Open Top Chambers: Fang and Moncrieff (1998)
- Forced Diffusion Chambers: Risk et al. (2011).

The NSS technique is invasive, and the conditions of the measurements may be different from the real conditions, meaning “not chamber head deployed” conditions. This difference may affect the measurements. Then, for precise measurements, we must minimize the differences if we can or correct the measurements.

200 General issues concerning closed chamber techniques, construction, operation and wind speed corrections will be listed elsewhere. In this paper, only special issues and solutions concerning the evaporation chamber ASERC technique corrected versus the wind speed are reported explicitly, but the experimental setup also implicitly includes some general solutions adopted for the closed chamber technique.

205 A usual assumption concerns soil efflux, which results from the migration of the gas of interest through the soil, assumed to be pure molecular diffusion as described by Fick’s laws. However, as liquid water is transformed into gaseous water vapor during evaporation, the volume is strongly increased by approximately 1250-fold. Evaporation efflux is then a mass flow, not a diffusion, A device allowing an additional gas volume to emerge from the soil into the chamber head not raising the internal pressure as well, needs to be implemented. Different solutions are possible and actually concern all the closed chambers since  
 210 soil evaporation is always present even if water vapor is not the gas of interest. One of the most commonly used devices is an open vent tube, which gives rise to another problem: the Venturi effect, listed later in this text as wind speed-induced influence. Another solution consists of an expansion room implementation that allows expansion of the chamber head volume while maintaining the internal pressure in equilibrium with the external air pressure. The expansion room is not subject to the Venturi

effect. The late solution was then adopted for ASERC. This  $q = \frac{13.2471488 \times e^{\frac{17.67 \times T_a}{243.5 + T_a}} \times RH}{273.15 + T_a}$  device allows equalization of the

$$q = \frac{13.2471488 \times e^{\frac{17.67 \times T_a}{243.5 + T_a}} \times RH}{273.15 + T_a} \text{device}$$

215 internal chamber head pressure and external ambient pressure even if the external pressure is changing, which is important to preserve the external turbulence influences.

All internal metallic parts were coated with a high polytetrafluoroethylene (PTFE, i.e., Teflon) content paint to reduce the water vapor sorption on a metallic surface as much as possible and to not affect the initial *RH*.

220 Inside the collar was inserted a pipe allowing the air entrapped by the chamber head during chamber deployment to flow freely through to a nitrile finger cot (expansion room) to equilibrate the inside and outside pressure and allow a small chamber volume expansion to compensate for the mass flow from the soil. Compared to the chamber head volume, during chamber head deployment, the volume increase is very small and does not bias the calculations. This expansion room also allows equal pressures inside and outside the deployed chamber head, which is important for pressure pumping conservation (described

225 later in the text).

As heating from solar radiation may strongly affect the evaporation process by artificially raising the chamber head temperature, special attention is given to shielding the chamber head with a first albedo shield made from a white painted stainless-steel plate. This shield screens direct radiation; however, its temperature will rise, and its infrared radiation may reach

230 the chamber head as well. A well-known technique used for cryogenic fluid operation was then adapted by interposing a second infrared (IR) shield made from a plastic plate coated with a thick aluminum foil on both sides. In this way, the closed chamber head internal temperature is assumed to be equal to the external ambient temperature.

## 2.2 Measurement protocol

For all the calibration measurements, the chamber was placed on holds, and the collar bottom, normally inserted into the soil,

235 was hatched with elastic plastic foil. An electronic scale was placed just below this foil, and a bucket with a studied soil was placed inside the collar reposing on the scale configured to never turn off (power save disabled) with the plastic foil between the bucket and the scale plate. A basic scheme depicts the chamber and experimental setup function (Fig. 01). With this setup, the bucket mass diminution (due to enclosed soil water evaporation) was relatively well monitored and provided real evaporation (*ER*) under isothermal conditions.

240

An external fan blows the air on the chamber, and an ultrasonic anemometer WindSonic 2D (Gill Instruments Limited, Lymington Hampshire, UK) allows monitoring and recording (on the data logger CR1000) the resulting wind speed 5 cm above the sample soil surface. The  $2 \text{ ms}^{-1}$  measured 5 cm above the surface equals approximately  $6.5 \text{ ms}^{-1}$  measured 2 m above the surface (logarithmic profile).

The data logger CR1000 was programmed to command closure (chamber head deployment) or opening of the chamber, to record the measured humidity and temperature along with the pressure, to control the embedded fan rotation speed inside the chamber head and to monitor the external wind speed before and during the deployment. Before each chamber deployment, a prior 120 s flushing with a 100% duty operated embedded fan was performed. Between each PWM change for measurements, the chamber was opened, flushed for one minute and then closed again. Every six hours, a measurement cycle was initiated. Any measurement cycle consists of measuring the absolute humidity accumulation in a closed chamber head with the embedded fan powered from PWM=10% duty to PWM=100% duty by steps of 10%, giving then 10 consecutive chamber deployments. Each chamber deployment for each PWM takes approximately 10 min. With a flushing time between the deployments, the whole cycle takes over two hours. The six-hour delay between each measurement cycle was adopted to avoid strongly perturbing the natural evaporation process. This protocol and ten different PWM measurements are for the internal fan influence characterization study purpose only. The real measurement protocol, as described below, is much shorter, allowing more frequent chamber deployment.

The studied soil is either sandy, meaning rough sand (0.1-3 mm) or clayey (high clay content soil 50% clay, 40% silt, 10% sand). Real evaporation is deduced by weighing the bucket with the studied soil and calculating the corresponding  $M_B$  mass variation. Soil moisture  $w$  was determined by the ratio:

$$w = \frac{(M_B - M_0)}{M_s} \quad (1)$$

where  $M_0$  is the bucket mass with dry soil, and  $M_s$  is the dry soil mass only (without the bucket mass). This definition, gravimetric water content, is not a usual volumetric water content provided by all soil water content (SWC) probes but is often used for clayey soils since the soil volume changes and the crack formation yields a very complicated volume calculation.

Indeed, an additional difficulty concerns the volume determination for clayey soils, as the volume is subject to change with the soil moisture content (swelling soils). Additionally, the crack appearance makes volume determination and even its definition particularly difficult. Are the cracks part of the soil sample or not? For these studies, the gravimetric water content is more usable.

## 2.2 Flux calculation algorithms

To estimate the water vapor efflux by the NSS technique, the absolute water vapor concentration  $q$  is monitored. Measured concentration versus time gives a curve regressed by an exponential rise (ER) formula very widely presented in all physical

processes, as it reflects a variation versus time  $dC/dt$ , where  $C$  is the scalar of interest and is proportional to the gap between the instant scalar value and the stable limit value  $C_l$ :

$$\frac{dC}{dt} = k(C_l - C)$$

280 (2)

This differential equation describes widely spread physical behavior and has a general solution of the following form:

$$C(t) = Ae^{-kt} + B$$

(3)

285 with  $A$  and  $B$  being constants.

With initial and final conditions, we can determine these constants using  $C_0$  as the initial value and  $\tau$  as the characteristic time, also called response time ( $\tau = \frac{1}{k}$ ):

$$C(t) = C_l - (C_l - C_0)e^{-t/\tau}$$

290 (4)

This variation behavior is very often observed in nature, including electronic and sensor responses to measured variable  $C$  changes. Concerning evaporation rate or ( $ME$ ), by definition, is determined by temporal derivation of the absolute water vapor concentration  $q$  multiplied by chamber head volume  $V$  and divided by chamber basis surface  $S$ :


$$ME = \frac{V}{S} \left( \frac{dq}{dt} \right)_{t=0} = \frac{V}{S} (q_l - q_0) / \tau$$

295 (5)


The water vapor (and other gases emanating from the soil) accumulation rate inside the deployed chamber head is not constant. Only the initial evaporation rate ( $t=0$ , which means at the beginning of chamber head deployment) is then retained ( $q_l$  is the absolute water concentration limit;  $q_0$ , is the initial absolute water concentration, and  $\tau$  is the characteristic time of  $q$  evolution).

300 As in the case of all other soil trace gas measurements, the measured absolute water vapor concentration rise in a closed chamber head is not linear with time but rather follows an exponential rise (ER) law. Usually, due to the complexity of the accumulation and feedback process, the exponential law does not perfectly describe the measurements, and some deviations are observed, making the regression results sensitive to the starting point, duration and end point. This observation is general, intrinsically tied to the closed chamber technique (Nakano et al., 2004). Concerning water evaporation, the measurement curve  
 305 and the ER fit for a sufficiently long time present three well-defined cross points due to a noninstantaneous sensor measurement, as shown in Appendix B. For this study, to stabilize the numerical regression conditions (fit), the starting point is systematically chosen at the first cross point and the end point at the third cross point (Fig. 02 (b)). In other words, a double

fit is needed. A first fit on the whole disposable length provides the starting and the end points, and then, a second exponential rise fit is performed between these two points to provide every sought value. Only the result of the second fit is considered reliable. Of course, in some cases, such as a very slow evaporation, we do not observe the third cross point. In these cases, the retained interval is between the first cross point and the last available point.

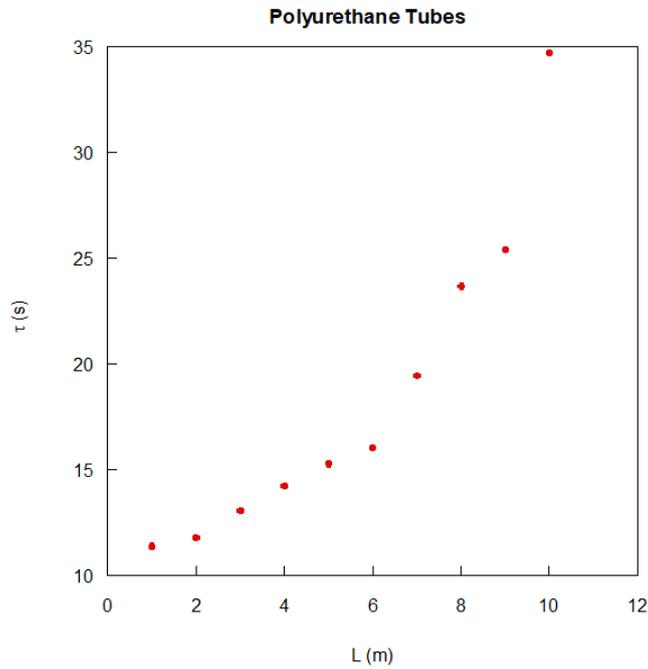

(a)

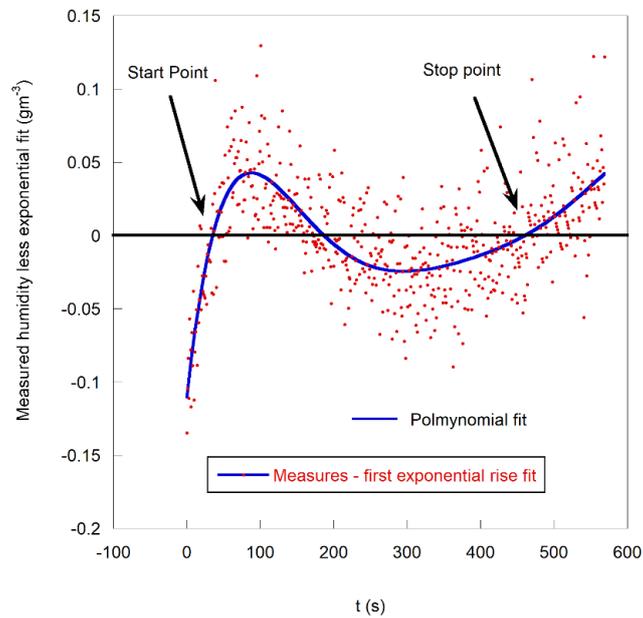

(b)

**Figure 02: (a) Apparent response time of the polyurethane tubes versus the length of the tubes. (b) Measured absolute humidity less exponential fit (residuals), giving start and stop points for a second regression.**

320 All calculations were automated using LabView 2015 programming (National Instruments Corporation, Austin, TX, USA).  
 The regression functions enforce the Levenberg–Marquardt algorithm for the *ER* fits over the whole acquired interval, and the  
 singular-value decomposition (SVD) algorithm gives residuals for polynomial fits with the least square method for optimizing  
 fitting parameters. Then, the calculated polynomial roots are determined by a function based on a Riders algorithm. The first  
 root gives the starting point (first cross point between the real measurement curve and the *ER* regressed curve), and the third  
 325 root (third cross point) gives the limiting time for new *ER* fit.

### 2.3 Sensor characteristics

The evaporation process is relatively fast, and then, the humidity sensors should be even faster; otherwise, the deduced efflux  
 may be biased. Fig. 03 (a) shows the accumulated effluxes measured by three sensors with different response times. Different  
 330 response times of different sensors bias the results thereof. A simple simulation, described in Appendix B and depicted in Fig.  
 03 (b), calculates the signal given by a sensor with different response times along with an artificial start delay imposed by the  
 operator (in the case of a leading pipe, we must wait after the chamber deployment before recording air analysis data from a  
 distant analyzer). As shown, a possible underestimation but also an overestimation of deduced efflux is observed. Such  
 overestimation may be committed with a relatively fast (as in P14 Rapid) but not very fast sensor (as in FTUTA 34) and a long  
 335 recording time. This possible overestimation vanishes with delay resulting from the leading pipes or from a slow head space  
 air mixing delay, as shown later in this text. In the case of the leading pipe presence, the imposed time delay depends on the  
 pipe diameter and the air debit importance. Flowing air is always mixed with the enclosed air of the pipe, making the calculated  
 time delay rather approximate and not very well defined. An embedded sensor is always preferable. The fastest reliable air  
 moisture and air temperature sensor used is a P14 Rapid (response time  $\tau_{63} < 1.5$  s) on a Linpicco plate holding a PT1000  
 340 sensor providing simultaneous RH (%) and air temperature  $T_a$  (°C) measurements.

A simple calculation based on an empirical water saturation pressure versus temperature law published by Wagner (1995)  
 gives the absolute humidity  $q$  ( $\text{g}\cdot\text{m}^{-3}$ ). This formula is accurate to within 0.1% over the temperature range  $-30$  °C to  $+35$  °C:

$$q = \frac{13.2471488 \times e^{\frac{17.67 \times T_a}{243.5 + T_a}} \times RH}{273.15 + T_a}$$

(6)

345 An external sensor such as IRGA provides better accuracy but requires a leading pipe use between the chamber head and the IRGA with an external pump. The leading pipes may seriously bias the measures by adsorption problems, condensation problems and time lag between the chamber closure and the corresponding air sample measurement. Additionally, a heating problem arises since any IRGA is heating, thus necessitating cooling down the analyzed air sample reinjected back to the chamber.


350 The usual polyurethane (PU) pneumatic tubes were checked. Fig. 02 (a) shows an apparent characteristic time variation of a measured absolute humidity rise by a fast IRGA (Li-840A, LI-COR Biosciences, Lincoln, NE, USA) on one edge of the leading pipes when a step such as humidity rise or fall is induced (by a Li-610 portable dew point generator, LI-COR Biosciences) plugging or unplugging on the other edge of the leading pipes versus the length of the pipes. The apparent characteristic time increases strongly with the leading pipe length, reflecting a strong sorption problem with the PU pipes.

355 Teflon pipes are preferable but need to be insulated anyway to prevent the possibility of condensation and always inducing a lag problem between the chamber closure time and the incoming air sample time from the chamber to the analyzer, which needs to be precisely known, as it may again bias the regression results.


An embedded, fast and accurate sensor is then preferable.

Once the experimental setup was truly built, the operation condition was chosen, the regression points stabilized, and the wind speed influence was studied. The scale allows the real evaporation (*RE*) measurement and sensor monitoring of closed chamber head air moisture, allowing the measured evaporation (*ME*) determination by *ER* fit and initial slope calculation. Calibration lies in the comparison between *ME* and *RE*.

360

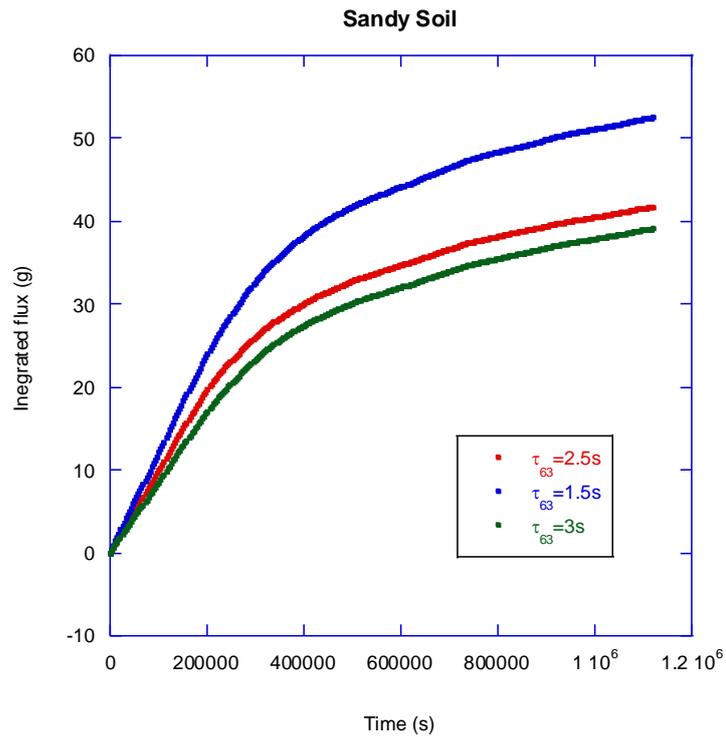

(a)

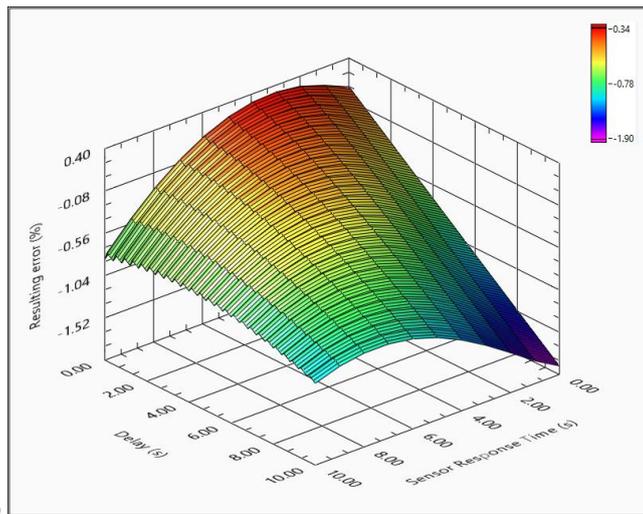

(b)

**Figure 03: (a) Integrated *ME* given by three different sensors with different response times. BME280 and 3 s response time, P14 Rapid with 1.5 s response time and F-Tuta 34 which has the faster response time of 0.25 s. Unfortunately, this sensor quickly malfunctioned and then was discarded. (b) Simulation of the *ER* regression error due to a slow sensor and introduced waiting delay with the origin of the time change.**

365

370

## 4 Results and discussion

375 The soil evaporation measurement technique described in this paper is based on an adapted NSS technique principle. The  
sensor characteristics, exact chamber configuration, regression calculations and wind speed influence are of great importance.  
As special attention was given to the design of the chamber to avoid affecting the internal chamber head temperature by solar  
radiation screening and IR radiation screening and to not affect the pressure variations incorporating an “expansion volume”,  
the differences in the temperature or the pressure inside the chamber head or outside were quite similar. In other words,  
chamber measurements do not have to be corrected versus temperature or pressure. The initial air humidity is also assumed to  
380 be the same, as the chamber fan is engaged just before chamber head deployment to flush the sensor. Only air movements  
cannot be preserved, and their influence on soil evaporation must be corrected


The wind influence on soil evaporation depends on numerous variables, such as the soil temperature and moisture, the air  
temperature and the humidity, as well as the soil composition and the soil texture. These variables may change more or less  
quickly, and some of them, such as the soil texture, are not monitorable in real time.

385 Consequently, even if we succeed in modeling the wind effect, we will not be able to use this wind effect for chamber data  
corrections. An autocalibrating chamber would be considered a solution. The target is not to measure every variable and inject  
it into a complex model but rather to measure the “susceptibility” of the soil evaporation to the wind and correct the chamber  
measurements against the measured wind. The following protocol gives very simple yet relatively accurate results.

### 4.1 Fundamental finding

390 At a fixed internal fan speed (PWM constant), the measured water vapor efflux (*ME*) is not directly proportional to the real  
water vapor efflux (*RE*) during a soil drying process with a stable wind (Fig. 04).

This nonlinearity changes with the soil composition and even with the soil texture, making it impossible to correct any data  
for all soil compositions and textures with a unique formula based only on the wind speed.

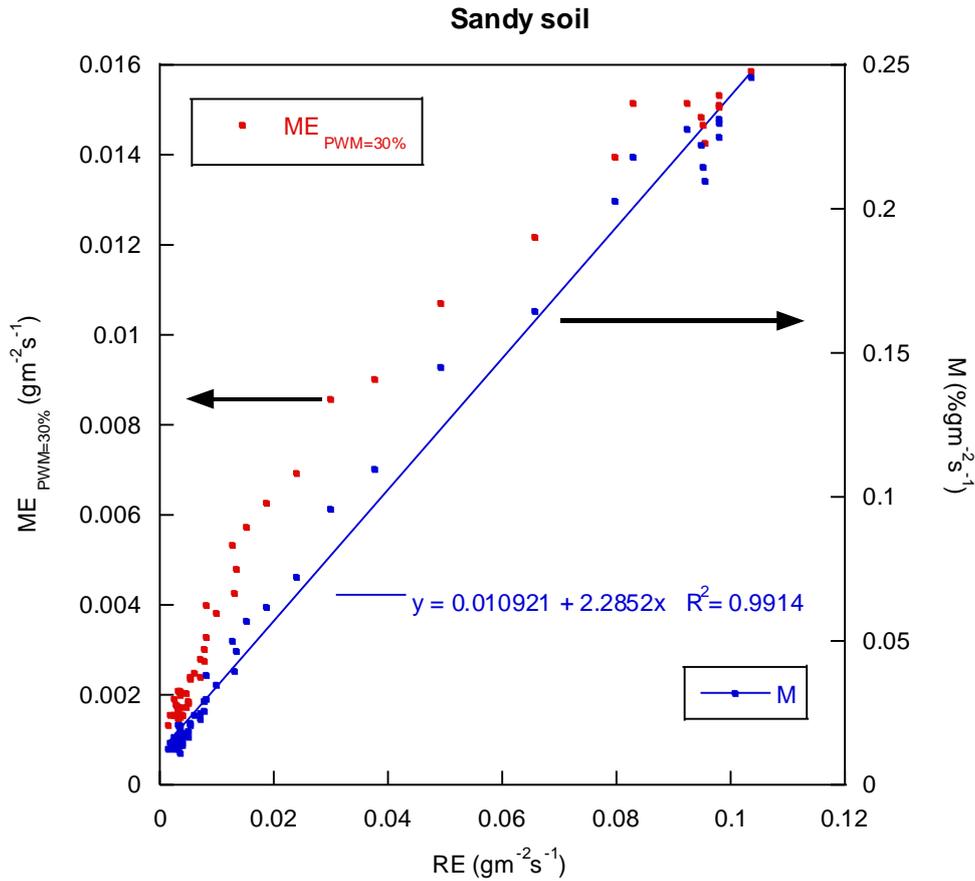

395

**Figure 04: Measured evaporation versus real evaporation (red dots on the left side axis) and M, averaged measure multiplied by the Z factor, along with a linear regression (blue dots on the right-side axis) for sandy soil under a 1.15  $ms^{-1}$  wind speed.**


#### 400 4.2 Embedded fan influence check

Figure 05 also shows the recorded water vapor efflux with sandy and clayey soil versus the fan PWM duty control. Both soil results are very well described by an exponential law:

$$ME(PWM) = A * e^{-Z/PWM}$$

(7)

405 A and Z are constant for a given soil sample and external conditions. In the adopted chamber head configuration, the internal fan influence is similar to the external wind influence. Similar but not identical since the wind brings some fresh air when a fan can only mix the internal head space air with a progressively rising water vapor concentration.

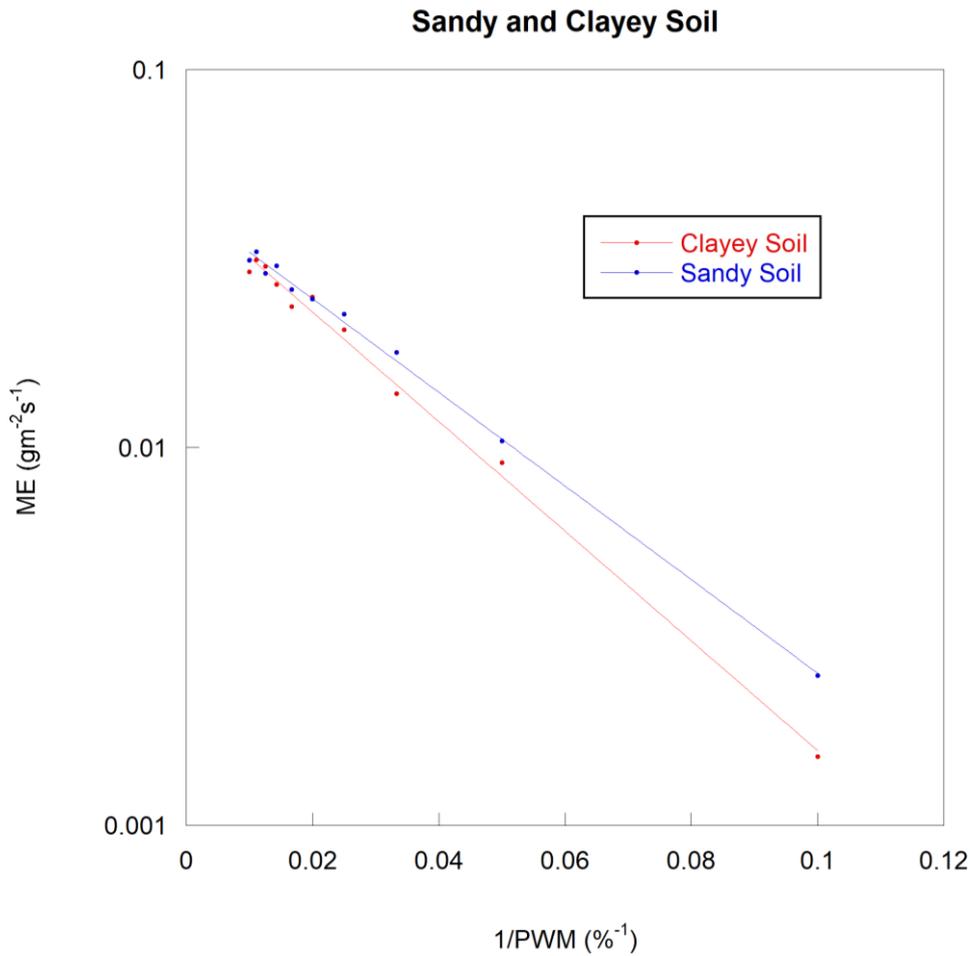


410 **Figure 05: Measured evaporation versus 1/PWM for sandy soil under 0.72 ms<sup>-1</sup> wind and for clayey soil under 0.8 ms<sup>-1</sup> wind speed.**

The constant  $A$  reflects the amplitude of the evaporation for a given soil and weather conditions, and the constant  $Z$  reflects a soil susceptibility to the internal fan mixing flow. By similitude, one can assume  $Z$  reflects the soil evaporation susceptibility to the wind speed.

415

To determine  $Z$ , the most effective way is to perform numerous measurements with a different  $PWM$  value and apply an exponential regression to all these results ( $Z_{total}$ ). However, this method is long, and resulting perturbations do not allow a high sampling rate. Two-point measurements used for  $Z$  determination are of a relatively good concordance if the first fan speed used is low, such as  $PWM = 10\%$ , and the second speed is significantly higher, such as  $PWM = 30\%$  (Fig. 06).

420

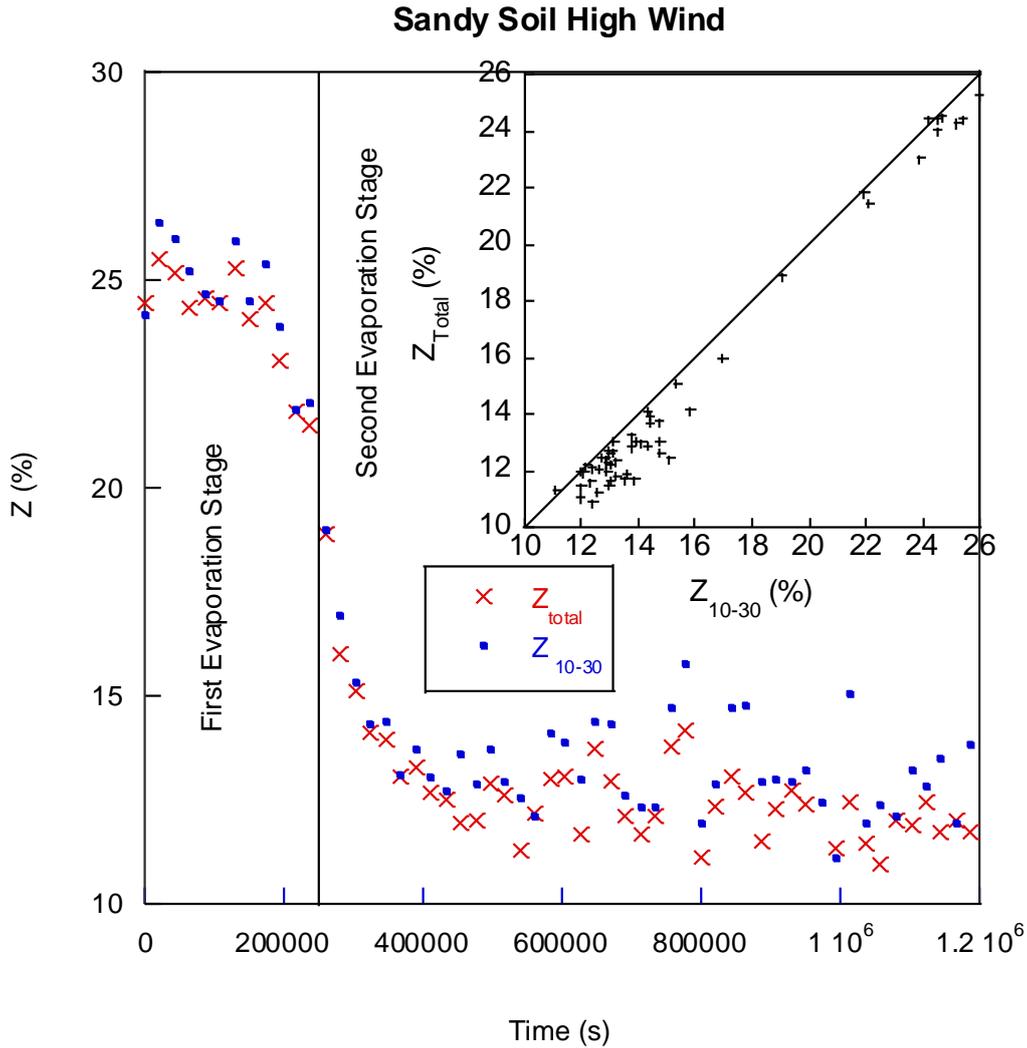

**Figure 06:**  $Z_{total}$  and  $Z_{10-30}$  versus time for sandy soil at a relatively strong wind of  $1.15 \text{ ms}^{-1}$ . Insert, the same values of  $Z_{total}$  versus  $Z_{10-30}$ .

425

A visible  $Z$  drop between the first evaporation stage and the second evaporation stage is observed. The best results for a correction were given by the function  $M$ , which is the average of  $ME_{10}$  measurements at  $PWM = 10\%$  and  $ME_{30}$  measurements at  $PWM = 30\%$  multiplied by  $Z_{10-30}$  obtained by an exponential regression of the two-point measurement  $ME_{10}$  and  $ME_{30}$  versus  $1/PWM$  by an exponential Eq. 7:

430

$$M = \frac{ME_{10} + ME_{30}}{2} * Z_{10-30}$$

(8)

Figure 04 shows that  $RE$  is nearly proportional to  $M$  (defined by Eq. 8) and Fig. 07 shows that this proportionality constant, called thereafter  $m$ , depends on the wind speed and not on the soil composition, which is the main benefit of  $Z$  introduction.

435 Only  $M$  depends on the soil composition, soil texture or soil and air meteorological variables pertinent for soil evaporation measurements.

$$RE = m(w_s) * M + B$$

(9)

440  $B$  is a constant of a very small amplitude useful only for very dry soil.

We can then decompose the Eq. 9 in three terms:

- $m(w_s)$  is a correction coefficient that depends only on the wind speed, the only pertinent variable affected by the chamber head deployment.

445 -  $M_{10-30} = \frac{ME_{10} + ME_{30}}{2}$  reflects soil evaporation depending on all pertinent variables, such as SWC, air water vapor demand, air and soil temperature, and pressure, which are not affected by chamber head deployment under fixed boundary layer air movement.

- $Z$  reflects the soil evaporation susceptibility to the wind speed, as with the same wind speed, soil evaporation is not the same depending on the soil composition, soil texture, etc.

450 The  $m$  dependence of the wind speed is not trivial. The plateau at approximately  $w = 0.5 \text{ ms}^{-1}$  probably corresponds to the fan perturbation concordance at  $PWM = 20\%$  (an average between  $PWM=10\%$  and  $PWM=30\%$ ) comparable to the wind speed of  $0.5 \text{ ms}^{-1}$  perturbations. This particular value is tied to the chamber design and cannot be used as a universal value. The other limitation is the high wind speed. As shown by Smits et al. (2015), for wind speeds superior to a threshold value  $W_{Smax}$ , the evaporation process is not much more affected by wind. Then,  $m(W_s)$  is probably no longer linear with  $W_s > W_{Smax}$ .

455 For the studied range of the wind speed, the adopted adjustment formula for  $m(W_s)$  is of the form:

$$m(W_s) = \frac{a * W_s}{e^{b/W_s}} + c(1 - e^{-d*W_s}) + g$$

(10)

with a, b, c, d and g constants determined empirically.

460

As a validity check for the studied wind speed in the range of zero to  $2 \text{ ms}^{-1}$ , Fig. 08 a) shows all raw data ( $RE$  versus uncorrected  $ME_{10-30}$  (average of  $ME_{10}$  measured with  $PWM=10\%$ , and  $ME_{30}$  measured with  $PWM=30\%$ ) used for calibration, and Fig. 8 b) shows all the available data corrected using  $m(W_s)$ ; the unique function for the composition of all soils and texture

465 depending only on the wind speed. A linear regression shows reasonable concordance with  $R^2 = 0.95$ . Without windspeed corrections,  $ME$  is approximately 10-fold smaller than  $RE$ .


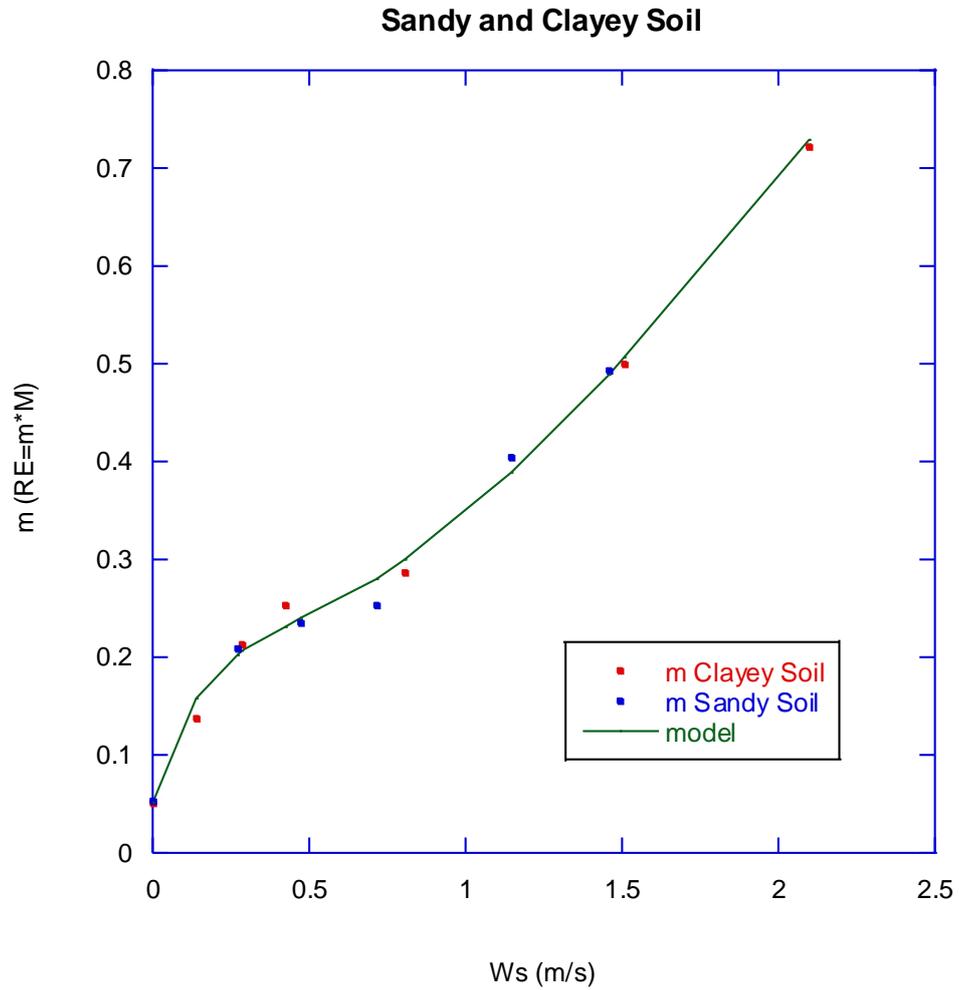


Figure 07:  $m$  versus wind speeds for sandy soil and clayey soil.

470

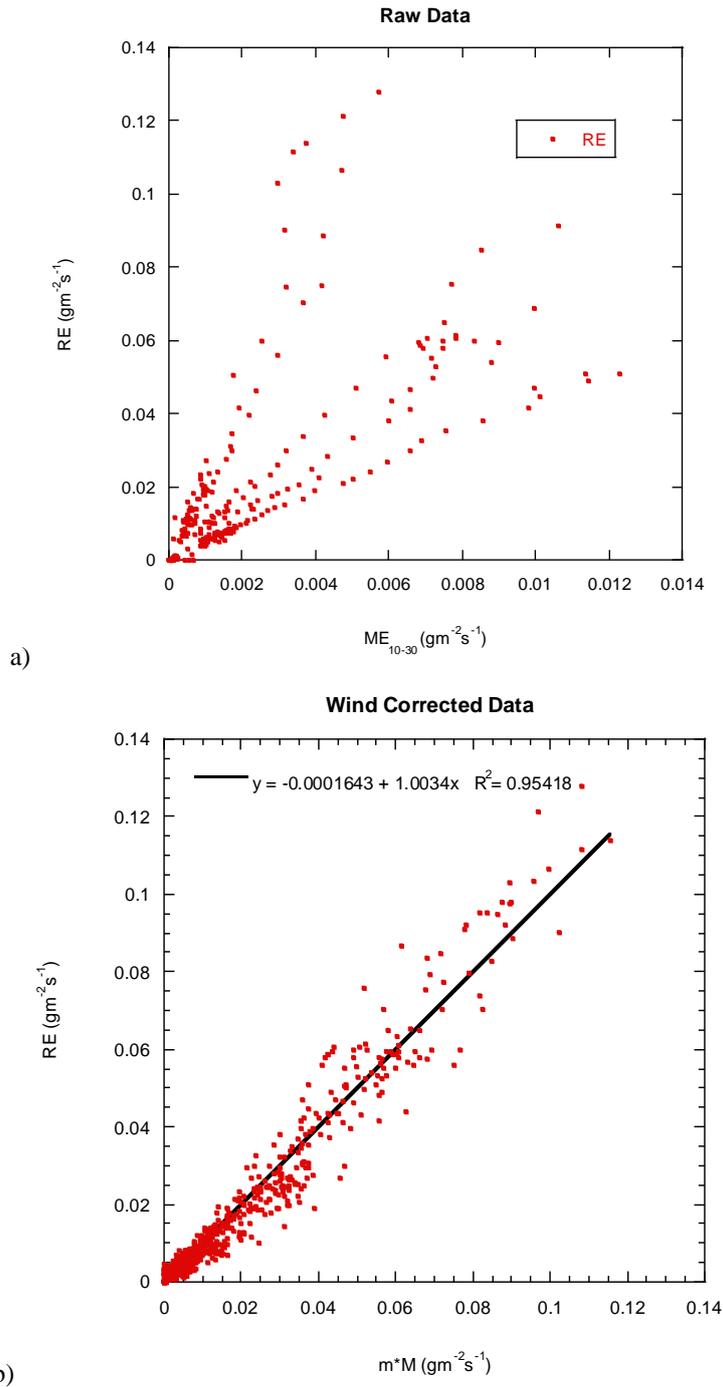

**Figure 08: a) RE versus ME (raw data, average between PWM=10 and PWM=30% measurements). b) RE versus wind speed corrected ME for all disponsible data along with a linear regression.**

475 **4.3** $RE_{Second\ Stage} = C(w_s) * e^{D*w}$  **Wind speed affected ME**

$$RE_{Second\ Stage} = C(w_s) * e^{D*w}$$

This section describes the differences between  $RE$  and  $ME$  under a strong wind. Two phenomena were identified: water vapor sorption by wind-dried soil and inertial water vapor effluxes after chamber head deployment. Special attention should be given to clayey soils under changing wind and to the first 60 s of measurements after chamber head deployment.

#### 480 **4.3.1 Water vapor sorption**

Figure 09 shows the resumed  $ME$  versus the soil moisture for sandy soil (a) and clayey soil (b). For sandy soil, as we can expect, since the measurements are done under a chamber cloche that isolates the soil from the wind, the measures do not display a clear wind dependence. In contrast, for clayey soil, in contrast to  $RE$ ,  $ME$  decreases with increasing wind speed. This finding may be explained by two facts:

485 Compared to trace gas effluxes such as  $CO_2$ ,  $CH_4$  or  $N_2O$  effluxes, the water vapor efflux  $RE$  has two source sink components: production ( $P$ ) and stock ( $S$ ) from the soil pores, dissolution into the soil water or sorption (absorption plus adsorption).

$$RE = P - \frac{\partial S}{\partial t}$$

(12)

Real surface efflux is then a result of the production less stock variation.


490 The wind may have a great influence on the efflux by forcing to unstock but much less or even nil influence on the production itself in the case of trace gases such as  $CO_2$ ,  $N_2O$  or  $CH_4$  and the deep subsurface evaporation with a low porosity soil.

In the case of water vapor efflux, the soil water vapor stocking ability exists as well in the case of a dry soil layer formation (DSL) (E. Balugani et al., 2018) that concerns mainly sandy soils under arid or semiarid climates (Wang, 2015), as in the case of simply nonsaturated soil (vadose zone) (Balugani et al., 2016). In both cases, stockage is realized in soil pores saturated


495 with water vapor or by soil (mainly clay) sorption. The migration of water vapor from this undersurface zone is the predominant  $RE$  process in the evaporation second stage (Geistlinger et al., 2018). Moreover, on the one hand, concerning evaporation, wind may directly influence production in the shallow subsurface (Harris, 1916; Smits, 2015; a quasiexhaustive list of evaporation factors is given by Faseel Suleman et al., 2017), and on the other hand, the soil is able to absorb water vapor from

a deeper and wetter evaporating soil layer or from the air, making stock  $S$  dependent not only on soil water vapor production

500  $P$  but also on the soil/atmosphere surface interaction (Amer, 2015). This last point may explain why the sandy soil chamber-based measurements are independent of the external wind when the clayey soil gives the measurements of the water vapor effluxes decreasing with the increasing external wind.

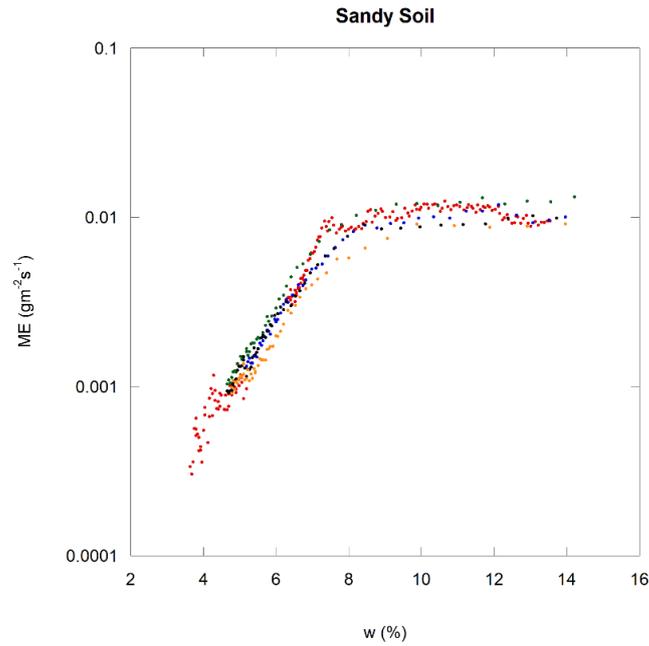

(a)

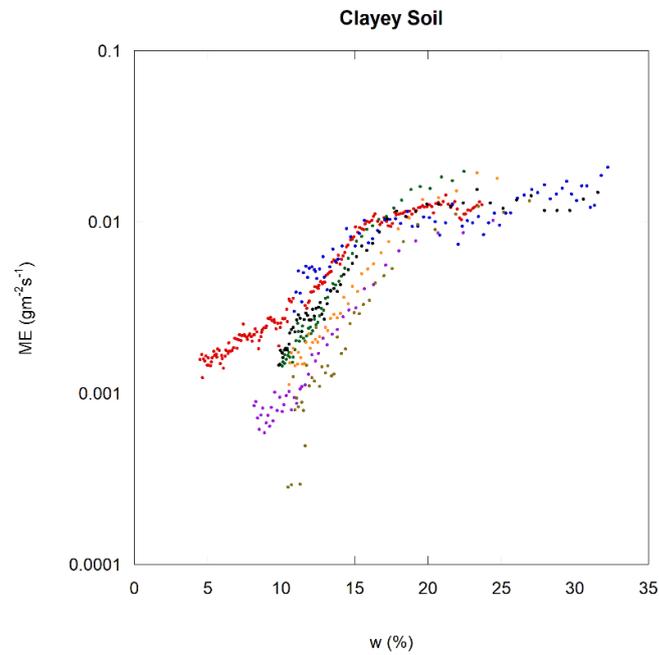

(b)

505

**Figure 09: Measured evaporation  $ME$  versus gravimetric soil moisture (PWM=30%); (a) sandy soil, and (b) clayey soil at several wind speeds.**

Indeed, the ability of soil to absorb water vapor increases with decreasing particle size (Chiorean, 2017), or by definition, sand particles are several magnitudes larger than clay particles. Sandy soil is then much less able to absorb water vapor than clayey soil, for which water vapor sorption is well known and documented from an experimental and theoretical point of view (Johansen and Dunning, 1957; Likos and Lu, 2002; Leelamanie, 2010; Arthur et al., 2016). Under windy conditions, the soil moisture top layer moisture is an equilibrium between wind pumping and the soil water absorption/retention forces. When the wind ceases, another equilibrium must be reached with a lower soil layer of a higher moisture. Short-term water vapor sorption by the previously wind-dried soil layer may significantly, but only temporarily, lower, the apparent evaporation rate  $RE$  (Jabro, 2009). Consequently,  $ME$  behavior is very different for sandy soil and for clayey soil. When the chamber head is deployed, the external wind speed influence is stopped, and the internal fan influence is started. Sandy soil adapts almost immediately to the new conditions but not clayey soil. This point is important for real measurements of clayey soil evaporation under changing wind speed, as the measured results correspond to the pondered integration of previous wind speed influences not only to the wind speed of the moment.

Figure 10 (a) shows  $ME$  behavior at always the same fan speed ( $PWM = 20\%$ ) over wet sandy or clayey soil after one day of a strong wind that ceases immediately after the first measurement engagement (30 measurements, each chamber deployment for 10 minutes interspersed with chamber opening and head space flushing for 1 minute).



For sandy soil, the wind  $C(t + dt) = a * C(t) + (1 - a) * S(t)$  dries the soil sample, but chamber deployment, even if it  $C(t + dt) = a * C(t) + (1 - a) * S(t)$  dries

insulates the soil sample from the external wind, does not give an opportunity to the shallow, wind-dried layer of sandy soil to reabsorb water vapor from the air or from the deeper soil and does not limit the measured evaporation rate (Figure 10). For both sandy soil and clayey soil, the difference in real evaporation is approximately one decade between zero-wind evaporation and small-wind evaporation, which can be attributed to a shallow boundary air layer over the soil that is disturbed by any wind. Without wind, this boundary has a high water vapor content, limiting evaporation from the soil by molecular diffusion. A slow advection is also present (water vapor is lighter than the air), but this transport is visibly very slow.

For clayey soil, the wind dries the soil sample in the same way as for the sandy soil. However, after chamber deployment, a previously wind-dried clayey soil layer absorbs water vapor from the deeper wetter soil, reducing the net water vapor efflux  $ME$ . The measured surface efflux is real, but the conditions are not. We are in a transition regime caused by chamber deployment and the measured soil portion isolation from the external wind. In the sandy soil case, this transition period is very short ( $ME$  is wind independent) and does not affect the measurement when, in the case of a clayey soil, this transition period is long and the characteristic time deduced from an exponential rise regression is approximately one hour long. The clayey soil sample needs approximately four hours to reach equilibrium under a wind speed  $Ws = 2 \text{ ms}^{-1}$  to new equilibrium under a nil wind speed  $Ws \approx 0 \text{ ms}^{-1}$ .


Figure 10 (b) displays the  $ME$  behavior at  $PWM=20\%$ , but this time, the soil sample was oven-dried for 24 h at  $105 \text{ }^\circ\text{C}$ . The bucket with dried soil samples was sealed and opened just before the first measurement. Both the clayey soil and the sandy

soil sorb the water vapor from the atmosphere (negative  $ME$ ), but the sandy soil sorption quickly falls to nearly zero when clayey soil sorption is enduring and is inversely proportional to the air water demand.

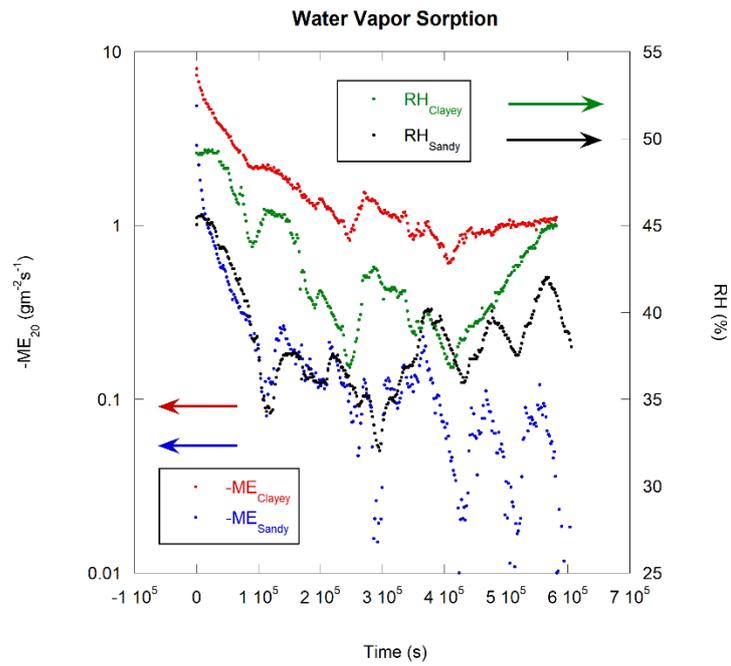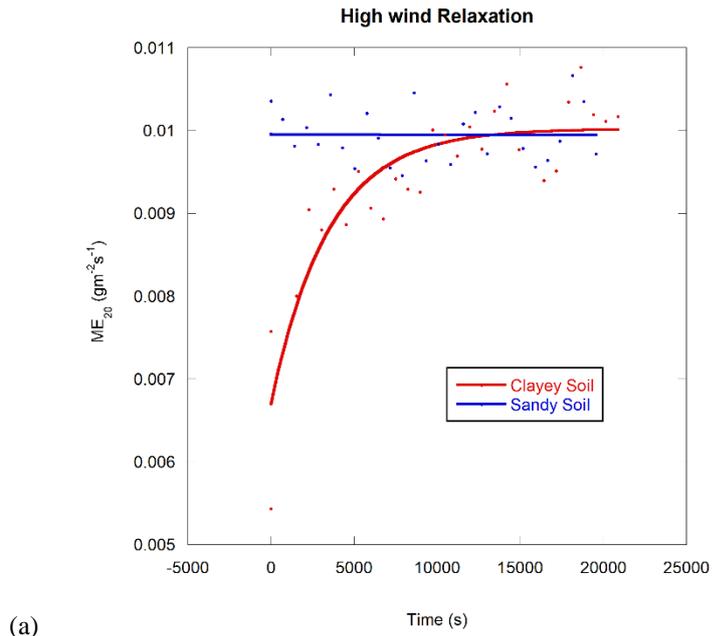

**Figure 10: Measured (at PWM=20%) evaporation  $ME$  versus time (a) after a strong wind ( $W_S = 2 \text{ ms}^{-1}$ ) for clayey and sandy soil. The slide line represents a linear regression for sandy soil and an exponential rise regression for clayey soil. (b) after oven drying for 24 h at  $105 \text{ }^\circ\text{C}$ .**

550

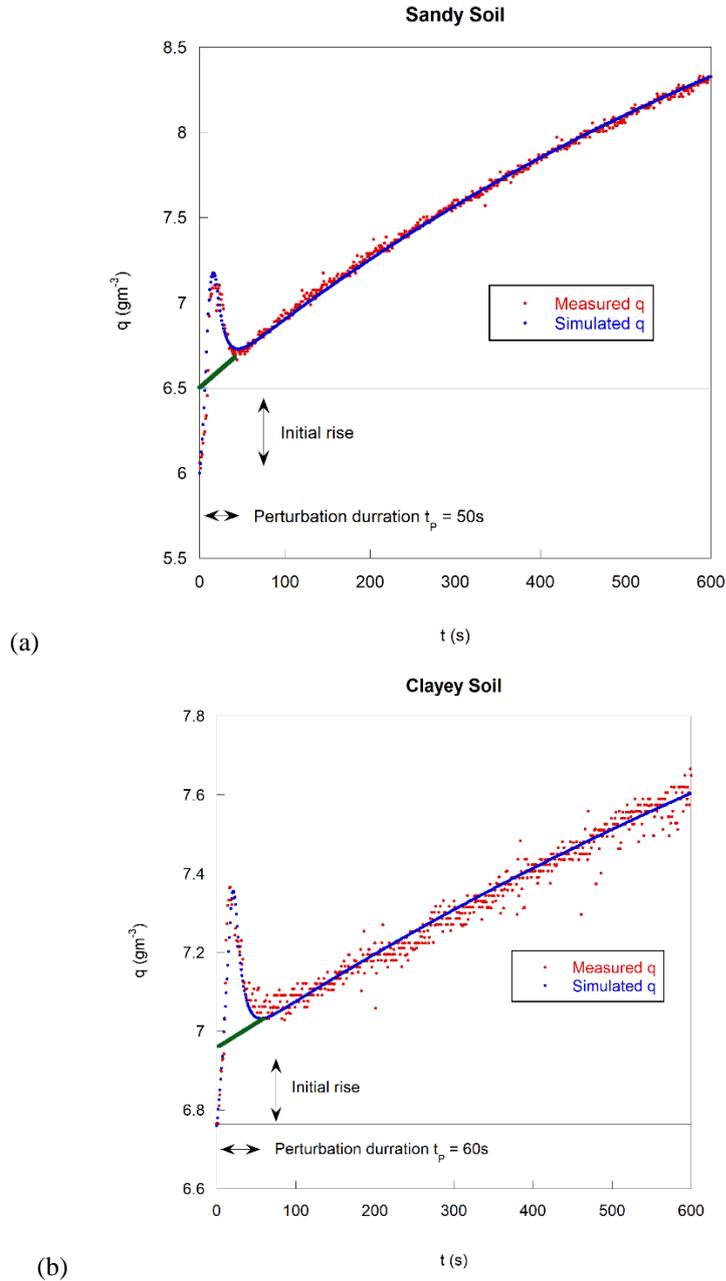

**Figure 11: Absolute water vapor concentration versus time. Measured concentration and simulated concentration: (a) sandy soil, and (b) clayey soil.**

### 4.3.2 Soil evaporation inertia and chamber head air mixing time.

560 During chamber head deployment with a high-speed wind and a relatively wet soil, an initial peak is observed in the enclosed air absolute humidity curve versus time (Fig. 11(a) for sandy soil and 11 (b) for clayey soil).

This observation is a direct consequence of noninstantaneous head space air mixing coupled with a high-water vapor efflux in the boundary layer over the soil forced by the wind and is qualitatively well described by a very simple model of mixed closed space air. A larger volume of low-humidity air (chamber head) mixed with the smallest volume of high-humidity air (boundary layer volume) taken linearly increases the humidity, reaching a maximum, and then rapidly decreasing, reaching a usual *ER* evolution (see the scheme in Fig. 13(a)). This mixing process may be described by the following equation:

$$C(t + dt) = a * C(t) + (1 - a) * S(t) \quad (13)$$


where  $C(t)$  is the measured concentration of interest,  $a$  is the mixing ratio defined by the proportion of the recycled air divided by the proportion of the air coming from the boundary layer and  $S(t)$  is the concentration within this layer.  $S(t)$  is the sum of the usual *ER* evolution  $SE_R(t) = C_L - (C_L - C_S) * \exp(-t/\tau_0)$  with an overage of the water vapor due to the residue of a high wind forced efflux  $S_R(t)$ . This overage concentration is modeled starting from zero, reaching a linear maximum value during approximately half of the perturbation delay  $t_p$  and then decreasing quickly and always linearly over time (Fig. 12(b)). This process reflects a boundary air layer of high moisture that is formed by a strong wind-forced water vapor efflux, which is not immediately stopped by chamber head closure (residual efflux). The resulting perturbation ceases after 50 seconds of chamber head deployment for sandy soil. This initial peak vanishes with a lower wind speed, a lower soil humidity or a higher fan speed. For example, under  $PWM = 20\%$ , the initial peak is hard to spot and is no longer visible with higher fan speeds regardless of the wind speed (in the studied range) or the soil humidity. The peak vanishes, but an initial quick humidity rise inside the deployed chamber head is still visible.

580 Figure 11 also displays a simulation of the resulting absolute water concentration inside the chamber head; (a) for sandy soil, and (b) for clayey soil. Figure 12 provides the adjustment constants definitions:


- $C_0$  is the starting concentration within the chamber head air (ambient concentration).
- $C_l$  is the maximum concentration within the air boundary layer due to the residual inertial efflux enrichment in competition with the chamber head enclosing the air mixing by the embedded fan.
- 585 -  $C_S$  is the concentration resulting from the initial concentration raised by the residual inertial efflux ( $S_R$  is the residual surplus of the boundary concentration due only to the residual inertial contribution),  $a$  is the fan mixing ratio,  $t_m$  is the residual efflux

duration,  $t_e$  time of the residual efflux duration enhanced by the effective mixing time (13s in our case),  $\tau_0$  is the resulting characteristic time for an *ER* concentration evolution.

590 -  $C_L$  is the concentration of the boundary layer but on the soil side (limit of the concentration within the deployed chamber head after an infinite duration).

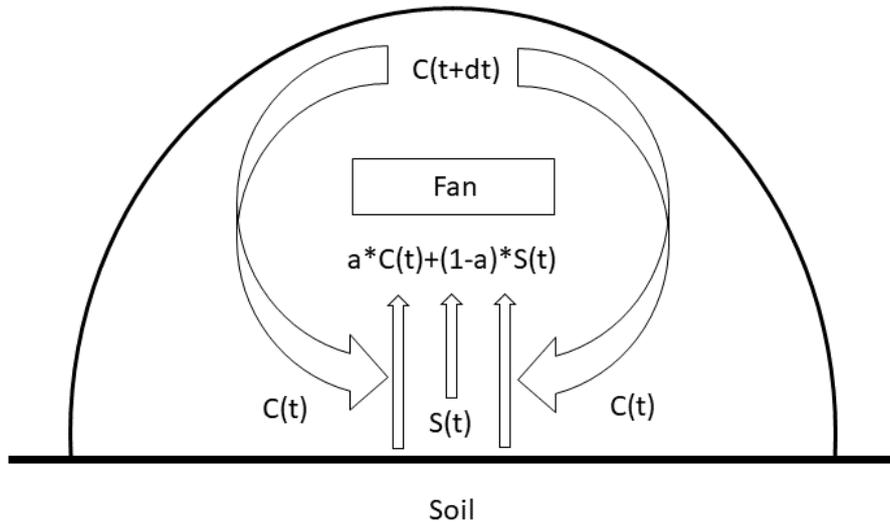

(a)

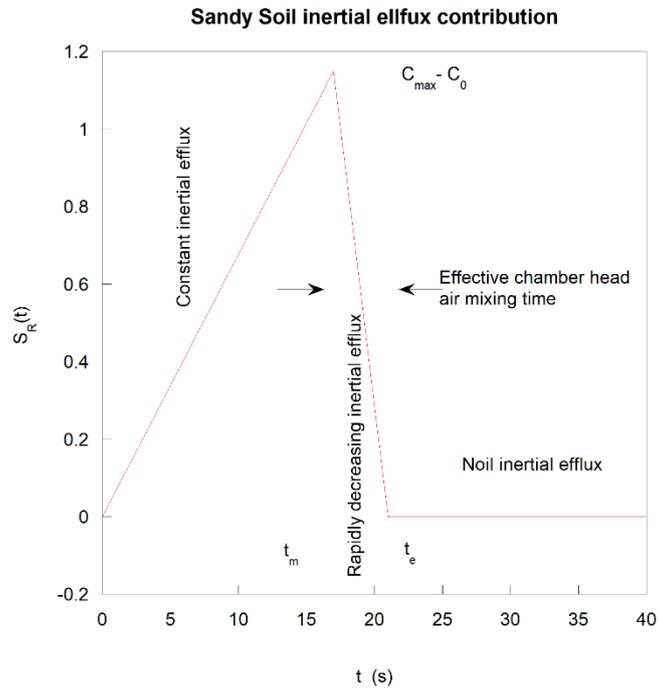

(b)

**Figure 12: (a) Chamber head air mixing principle. (b) Residual water vapor efflux to the boundary layer water vapor concentration  $S_R$  versus time.**

595

Indeed, the same measurement (PWM=10% under a high wind and soil moisture) performed with clayey soil (Fig. 11(b)) also shows an initial peak, but compared to sandy soil (Fig. 11(a)), this peak, as the whole evaporation rate, is of the smallest amplitude since the water vapor efflux, as discussed previously, is absorbed by the topsoil layer initially dried by wind pumping. With clayey soil, the initial peak perturbation duration is also slightly longer (60 s) than the initial peak perturbation of sandy soil (50 s).

600

This initial peak requires special attention during the *ER* regression calculations to avoid biased results. An initial short time lap exclusion, 50 s-60 s in this case, may be necessary. The data points should be discarded, but it is important not to shift the time origin because it may lead to an important flux calculation bias (5% in this sandy soil case). The amount of water vapor released during the first 50 s significantly increases the initial water vapor concentration measurements and the total water vapor content inside the chamber head (initial rise) but does not impact further efflux calculations.

605

For both simulations, the constants tied to the chamber design, such as  $a = 0.9$  and effective mixing time  $t_e - t_m = 13$  s, are the same, and only constants tied to the soil sample composition change (Table 1).

610

	$C_i$ (g.m <sup>-3</sup> )	$C_o$ (g.m <sup>-3</sup> )	$C_s$ (g.m <sup>-3</sup> )		$C_L$ (g.m <sup>-3</sup> )	$t_e$ (s)	$t_m$ (s)	$\tau_0$ (s)
Sandy soil	6	1.35	6.55		9.7	21	8	900
Clayey soil	6.76	0.8	6.96		8.74	30	17	1500

(1)

615 Compared to sandy soil, the residual efflux due to wind has the smallest amplitude but is longer.

### Conclusions

The aim of these studies was to build a self-calibrating chamber based on an NSS technique and a simple working protocol to correct the measured data versus the wind. The proposed chamber design along with a deployment and correction protocol allows  $R^2 = 0.95$  confidence on sandy or clayey bare soil for the surface wind in the range of 0 to 2 ms<sup>-1</sup>. The correction function has only one variable; the wind speed measured a few centimeters above the soil surface regardless of any other parameter, such as soil composition, soil texture, soil temperature or meteorological variable. However, a study of higher wind speeds is suitable but exceeds the ability of the present experimental setup. The presented results are valid for a bare soil chamber-based measurement. In the vegetative plot case, the measured wind speed at the chamber level will be comparatively

620

625 slow; however, the wind influence is still important and forced below the canopy wind speed through eddy pressure fluctuations (Kimball and Lemon, 1970-1971; Baldocchi and Meyers, 1991; Takle et al., 2004; Maier et al., 2010; Mohr et al., 2016; Poulsen et al., 2017; Mohr et al., 2017). The wind eddy pressure fluctuations generated by the above canopy penetrate below the canopy, forcing soil gas efflux. This so-called pressure pumping may be responsible for up to 50- to 100-fold enhanced effluxes. In other words, the most relevant way to correct the chamber-based measurements below the canopy is to correct it  
630 with the pressure fluctuation power spectrum or a pressure pumping coefficient (PPC) defined by Mohr et al., 2017 measured at the soil level. However, for bare soil, such as PPC, and the correlated wind speed, without the presence of vegetation, wind speed measurements remain valid for chamber-based measurement correction.

An important experimental campaign concerning CO<sub>2</sub> effluxes measured by the NSS technique is currently in progress, and the first results are showing that described methodology (several consecutive measurements with a different fan speed to  
635 deduce real efflux) is not directly applicable to other gas efflux measurements by the NSS technique such as CO<sub>2</sub> or N<sub>2</sub>O, probably because, contrary to the evaporation, the wind speed is acting mainly on the stock and not on the production of these gases. However, a similar technique is not excluded.

During the calibration measurements, some interesting observations concerning the sandy soil evaporation process and chiefly  
640 clayey soil evaporation process are reported.

All the soil samples under all the studied winds display two evaporation stages: the first stage is almost constant with lowering soil moisture and is greatly affected by wind, and the second stage is less affected by wind with exponential behavior versus soil moisture. These two evaporation stages are well described by  $Z$  variations, which are higher in the first stage. Both soil samples display a decade of  $RE$  difference without the wind and with a very small wind due to the air boundary layer  
645 perturbation.

Sandy soil does not display a consequent ability to absorb water vapor, and its stocking capacities are limited. However, the apparent evaporation inertia is conspicuous on the relatively wet soil under a relatively strong wind.

In contrast, clayey soil displays a great sorption ability and water vapor stocking or unstocking capacities with a characteristic time in the hourly range. The inertia is partially screened by the sorption magnitude, and a strong external wind is necessary.  
650 As described in Appendix A, in the second soil evaporation stage, regardless of the soil, evaporation follows an exponential law versus  $w$ . In clayey soil, the evaporation curve versus SWC  $w$  shows a common point  $CP$  ( $w = 15.5\%$  and  $RE = 0.024 \text{ gm}^{-2}\text{s}^{-1}$ ) for every wind and soil texture but a nil wind speed. The curve evaporation versus water content below the  $CP$  changes its slope. This point seems to correspond to the matrix air entry value (MAEV).

**Competing interests.** The author declare that he has no conflict of interest.

655 **Acknowledgements.** This study was mainly funded by ICOS France and Anna Zawilski (private donations). I would like to acknowledge Tiphaine Tallec (CESBIO, Toulouse, France) for her useful discussions. A special thanks to Valérie Le Dantec

(CESBIO, Toulouse, France) who greatly contributed to motivate this work. I am particularly grateful to Katia Bonne (LI-COR Biosciences GmbH, Bad Homburg, Germany) and Jason Hupp (LI-COR Biosciences, Nebraska, USA) for discussions and communications.

## 660 **References**

- Ahamad, N.: Occurrence of distribution of Vertisols. In: Ahmad, N., Mermut, A. (eds.) *Vertisols and Technologies for their Management, Development in Soil Science*, 24: 1–41, doi:10.1016/S0166-2481(96)80003-1, 1996.
- Amer, A. M.: *Water Vapor Adsorption and Soil Wetting*, Chapter 1, <https://www.intechopen.com/books/wetting-and-wettability>, doi:10.5772/60953, 2015.
- 665 Arthur, E., Tuller, M., Moldrup, P., and de Jonge, L. W.: Evaluation of theoretical and empirical water vapor sorption isotherm models for soils, *Water Resour. Res.*, 52, 190–205, doi:10.1002/2015WR017681, 2016.
- Aubinet, M., Vesala, T., Papale, D.: *Eddy Covariance, A Practical Guide to Measurement and Data Analysis*, Springer Dordrecht Heidelberg London New York, doi:10.1007/978-94-007-2351-1, 2012.
- Bain, W. G., Hutyra, L., Patterson, D. C., Bright, A. V., Daube, B. C., Munger, J. W., Wofsy, S.C.: Wind-induced error in the  
670 measurement of soil respiration using closed dynamic chambers, *Agricultural and Forest Meteorology*, 131 225–232, doi:10.1016/j.agrformet.2005.06.004, 2005.
- Baldocchi, D. and Meyers, T.: Trace gas exchange above the floor of a deciduous forest: 1. Evaporation and CO<sub>2</sub> efflux, *Journal of Geophysical Research Atmospheres*, 96(D4):7271-7285, doi:10.1029/91JD00269, 1991.
- Balugani, E., Lubczynski, M. W., and Metselaar, K.: A framework for sourcing of evaporation between saturated and  
675 unsaturated zone in bare soil condition, *Hydrological Sciences Journal – Journal des Sciences Hydrologiques*, VOL. 61, NO. 11, 1981–1995, doi:10.1080/02626667.2014.966718, 2016.
- Balugani, E., Lubczynski, M. W., van der Tol, C., Metselaar, K.: Testing three approaches to estimate soil evaporation through a dry soil layer in a semi-arid area, *Journal of Hydrology*, 567 405–419, doi:10.1016/j.jhydrol.2018.10.018, 2018.
- Bornemann, F.: *Kohlensäure und Pflanzenwachstum*. Mitt. Dtsch. Landwirtsch-Ges. 35:363, 1920.
- 680 Brændholt, A., Steenberg Larsen, K., Ibrom, A., and Pilegaard, K.: Overestimation of closed-chamber soil CO<sub>2</sub> effluxes at low atmospheric turbulence, *Biogeosciences*, 14, 1603–1616, doi:10.5194/bg-14-1603-2017, 2017.
- Bronswijk, J. J. B.: Modeling of water balance, cracking and subsidence of clay soils, *Journal of Hydrology* February 1988, Volume 97, Issues 3–4, 15, 199-212, doi:10.1016/0022-1694(88)90115-1, 1988.
- Chiorean, V-F.: Determination of Matric Suction and Saturation Degree for Unsaturated Soils, *Comparative Study - Numerical*  
685 *Method versus Analytical Method*, 2017 IOP Conf. Ser.: Mater. Sci. Eng. 245 032074, doi:10.1088/1757-899X/245/3/032074
- Chung, E-S., Soden, B., Sohn, B. J., and L. Shic: Upper-tropospheric moistening in response to anthropogenic warming, *PNAS* (2014), vol. 111, no. 32, 11636–11641, doi:10.1073/pnas.1409659111, 1988.

- Corte, A. and Higashi, A.: Experimental Research on Desiccation Cracks in Soil, Research Report, 66. Technical Report, Wilmette, Illinois: US Army Snow Ice and Permafrost Research Establishment, 1960.
- 690 Costa, S., Kodikara, J. K., and Shannon, B.: Salient factors controlling desiccation cracking of clay in laboratory experiments. *Géotechnique*, 63, 18–29, doi:10.1680/geot.9.P.105, 2013.
- Danie, D. E. and Wu, Y. K.: Compacted Clay Liners and Covers for Arid Sites. *Journal of Geotechnical Engineering*, 119(2): 223–237, doi:10.1061/(ASCE)0733-9410(1993)119:2(223), 1993.
- Davarzani, H., Smits, K., Tolene, R. M., Illangasekare, T.: Study of the effect of wind speed on evaporation from soil through  
695 integrated modelling of the atmospheric boundary layer and shallow subsurface, *Water Resour. Res.*, 50, 661–680, doi:10.1002/2013WR013952, 2014.
- Dexter, A. R., Advances in characterization of soil structure. *Soil and Tillage Research*, 199-238, doi:10.1016/0167-1987(88)90002-5, 1988.
- Dinka, T. M. and Lascano, R. J.: Review Paper: Challenges and Limitations in Studying the Shrink-Swell and Crack Dynamics  
700 of Vertisol Soils, *Open Journal of Soil Science*, 2, 82-90, doi:10.4236/ojss.2012.22012, 2012.
- Everest, T. and Ozcan, H.: The Properties and Comparison of the Vertisol Soils Formed on Different Physiographies, *International Journal of Sciences and Research*, Vol. 72, No. 12, doi:10.21506/j.ponte.2016.12.12, Dec. 2016.
- Fang, C. and Moncrieff, J. B.: An open-top chamber for measuring soil respiration and the influence of pressure difference on CO<sub>2</sub> efflux measurement, *Functional Ecology*, 12, 319–325, doi:10.1046/j.1365-2435.1998.00189.x, 1998.
- 705 Farrell, D. A., Greacen, L. E., Gurr, C. G.: Vapor Transfer in Soil due to Air Turbulence, *Soil Science- Volume 102 - Issue 5* – 305-313, 1966.
- Ferretti, D. F., Pendall, E., Morgan, J.A., Nelson, J.A., LeCain, D., and Mosier, A.R.: Partitioning evapotranspiration fluxes from a Colorado grassland using stable isotopes: Seasonal variations and ecosystem implications of elevated atmospheric CO<sub>2</sub>, *Plant and Soil*, 254: 291–303, doi:10.1023/A:1025511618571, 2003.
- 710 Fredlund, D. G.: Comparison of soil suction and one-dimensional consolidation characteristics of a highly plastic clay. M.Sc., thesis, University of Alberta, Edmonton, doi:10.4224/20378888, 1964.
- Fukuda, H.; Air and water Vapor movement in soil due to wind gustiness, *Soil Sci.*, vol 79 (249-258), 1955.
- Geistlinger, H. and Leuther, F.: Evaporation Study for real soils based on HYPROP hydraulic functions and micro-CT measured pore-size distribution. *Vadose Zone J.*, 17:180041, doi:10.2136/vzj2018.02.0041, 2018.
- 715 Good, S. P., Noone, D., and Bowen, G.: Hydrologic connectivity constrains partitioning of global terrestrial water fluxes, *Science*, 10 Vol. 349, Issue 6244, pp. 175-177, doi:10.1126/science.aaa5931, 2015.
- Goulden, M.L., Munger, J.W., Fan, S-M., Daube, B.C., and Wofsy, S.C.: Measurements of carbon sequestration by long-term eddy covariance: methods and a critical evaluation of accuracy. *Glob. Change Biol.*, 2, 169–182, doi:10.1111/j.1365-2486.1996.tb00070.x, 1996.
- 720 Hanks, R. J. and Woodruff, N. P.: Influence of Water Vapor Transfer Through Soil, Gravel, and Straw Mulches, *Soil Science*, Vol. 86, No. 3, 160–164, doi:10.1097/00010694-195809000-00010, 1958.

- Hao, X. M., Li, C., Guo, B., Ma, J. X., Ayup, M., and Chen, Z. S.: Dew formation and its long-term trend in a desert riparian forest ecosystem on the eastern edge of the Taklimakan Desert in China. *J. Hydrol.*, 472–473, 90–98, doi:10.1016/j.jhydrol.2012.09.015, 2012.
- 725 Harris, F. S.: Factors Affecting the Evaporation of Moisture from the Soil, *Journal of Agricultural Research*, Vol. VII, No. 10 Dec.4, 1916.
- Hatano, R., Nakamoto, H., Sakuma, T., and Okajima, H.: Evapotranspiration in cracked clay field soil, *Soil Science and Plant Nutrition*, 34:4, 547-555, doi:10.1080/00380768.1988.10416470, 1988.
- Heinemeyer, A., Di Bene, C., Lloyd, A.R., Tortorella, D., Baxter, R., Huntley, B., Gelsomino, A., and Ineson, P.: Soil  
730 respiration: implications of the plant-soil continuum and respiration chamber collar-insertion depth on measurement and modelling of soil CO<sub>2</sub> efflux rates in three ecosystems, *European journal of soil science* 62 (1), 82-94, doi:10.1111/j.1365-2389.2010.01331.x, 2011.
- Hill, R. J.: Implications of Monin–Obukhov Similarity Theory for Scalar Quantities, *Journal of Atmospheric Sciences*, 46(14), 2236-2244, doi:10.1175/1520-0469(1989)046<2236:IOMSTF>2.0.CO;2, 1989.
- 735 Hillel, D.: *Introduction to Environmental Soil Physics*. Elsevier Academic Press, Amsterdam, doi:10.1016/B978-0-12-348655-4.X5000-X, 2004.
- Heitman, J. L., Xiao, X., Horton, R., and Sauer, T. J.: Sensible heat measurements indicating depth and magnitude of subsurface soil water evaporation. *Water Resources Research*, 44, W00D05. doi.org:10.1029/2008WR006961, 2008.
- Heitman, J. L., Zhang, X., Xiao, X., Ren, T., and Horton, R.: Advances in heat-pulse methods: Measuring soil water  
740 evaporation with sensible heat balance. *Methods of Soil Analysis*, 2(1), doi.org:10.2136/msa2015.0029, 2017.
- Hollinger, D.Y., Goltz, S. M., Davidson, E. A., Lee, J. T., Tu, K., and Valentine, H.T.: Seasonal patterns and environmental control of carbon dioxide and water vapor exchange in an ecotonal boreal forest. *Glob. Change Biol.*, 5, 891–902, doi:10.1046/j.1365-2486.1999.00281.x, 1999.
- Holmes, R. M.: Estimation of soil moisture content using evaporation data. *Proceedings of Hydrology Symposium*, No. 2  
745 Evaporation. Queen’s Printer, Ottawa, 184-196, 1961.
- Jabro Jay D.: Water Vapor Diffusion Through Soil as Affected by Temperature and Aggregate Size, *Transp. Porous Med.*, 77:417–428, doi:10.1007/s11242-008-9267-z, 2009.
- Janssens, I.A., Kowalski, A.S., Longdoz, B., and Ceulemans, R.: Assessing Forest soil CO<sub>2</sub> efflux: an in-situ comparison of four techniques. *Tree Phys.*, 20, 23–32, doi:10.1093/treephys/20.1.23, 2000.
- 750 Johansen, R. T. and Dunning, H. N.: Water-vapor adsorption on clays, *Clays and Clay Miner.*, 6(1):249–258, 1957.
- Kimball, B. A. and Lemon, E. R.: Spectra of Air Pressure Fluctuation at the Soil Surface, *Journal of Geophysical Research*, VOL. 75, No. 33, doi: 10.1029/JC075i033p06771, 1970.
- Kimball B. A. and Lemon, E. R.: Theory of soil air movement due to pressure fluctuations, *Agric. Meteorol.*, 9 163-181, doi: 10.1016/0002-1571(71)90020-3, 1971.

- 755 Kimball, B. A., Boote, K. J., Hatfield, J. L., Ahuja, L. R., Stockle, C., Archontoulis, S., Baron, C., Basso, B., Bertuzzi, P.,  
Constantin, J., Deryng, D., Dumont, B., Durand, J-L., Ewert, F., Gaiser, T., Gayler, S., Hoffmann, M. P., Jiang, Q., Kim, S-  
H., Lizaso, J. S., Moulin, Nendel, C. P., Parker, Palosuo, T., Priesack, E., Qi, Z., Srivastava, A., Stella, T., Tao, F., Thorp, K.  
R., Timlin, D., Twine, T. E., Webber, H., Willaume, M., and Williams, K.: Simulation of maize evapotranspiration: An inter-  
760 doi:10.1016/j.agrformet.2019.02.037, 2019.
- Kodikara, J. K., Barbour, S. L., and Fredlund, D. G.: Desiccation cracking of soil layers. In Proceedings of the Asian  
Conference on Unsaturated Soils, UNSAT-Asia, Singapore (pp. 693–698). Balkema., 2000.
- Kodikara, J. K., Barbour, S. L., and Fredlund, D.G.: Structure development in surficial heavy clay soils: A synthesis of  
mechanisms. *Australian Geomechanics*, 37(3): 25–40, 2002.
- 765 Koola, D., Agam, N., Lazarovitch, N., Heitman, J. L., Sauer, T. J., and Ben-Gal, A.: A review of approaches for  
evapotranspiration partitioning, *Agricultural and Forest Meteorology*, 184, 56– 70, doi:10.1016/j.agrformet.2013.09.003,  
2014.
- Kurtzman, D., Baram, S., and Dahan, O.: Soil–aquifer phenomena affecting groundwater under vertisols: a review, *Hydrol.  
Earth Syst. Sci.*, 20, 1–12, doi:10.5194/hess-20-1-2016, 2016.
- 770 Kustas, W. P. and Agam, N.: Soil Evaporation, *Encyclopedia of Natural Resources*, doi:10.1081/E-ENRL-120049129, 2014
- Lai D. Y. F., Roulet, N. T., Humphreys, E. R., Moore, T. R., and Dalva, M.: The effect of atmospheric turbulence and chamber  
deployment period on autochamber CO<sub>2</sub> and CH<sub>4</sub> flux measurements in an ombrotrophic peatland, *Biogeosciences*, 9, 3305–  
3322, doi:10.5194/bg-9-3305-2012, 2012.
- Law, B.E., D.D. Baldocchi, P.M. Anthoni, Belowcanopy and soil CO<sub>2</sub> fluxes in a ponderosa pine forest. *Agric. For. Meteorol.*,  
775 94, 171–188, doi:10.1016/s0168-1923(99)00019-2, 1999.
- Le Dantec, V., Epron, D. and Dufrênen, E.: Soil CO<sub>2</sub> efflux in a beech forest: comparison of two closed dynamic systems,  
*Plant and Soil*, 214: 125–132, 1999.
- Leelamanie, D.A.L.: Changes in Soil Water Content with Ambient Relative Humidity in Relation to the Organic Matter and  
Clay, *Tropical Agricultural Research & Extension*, 13(1), doi:10.4038/tare.v13i1.3130, 2010.
- 780 Likos, W. J. and Lu, N.: Water vapor sorption behavior of smectite-kaolinite mixtures, *Clays and Clay Miner.*, 50(5),  
doi:10.1346/000986002320679297, 2002.
- Longdoz, B., Yernaux, M., and Aubinet, M.: Soil CO<sub>2</sub> efflux measurements in a mixed forest: impact of chamber disturbances,  
spatial variability and seasonal evolution, *Global Change Biology*, 6, 907-917, doi:10.1046/j.1365-2486.2000.00369.x, 2000.
- Lau, J. T. K.: Desiccation cracking of clay soils. MSc Thesis, Department of Civil Engineering, University of Saskatchewan,  
785 Canada <https://harvest.usask.ca/handle/10388/etd-03242010-112414>, 1987.
- Maier, M., Aubinet, M., Longdoz, B., and Parent, F.: Turbulence Effect on Gas Transport in Three Contrasting Forest Soils,  
*Soil Sci. Soc. Am. J.*, doi:10.2136/sssaj2011.0376, 2011.

- Mohr, M., Laemmel, T., Maier, M., and Schindler, D.: Gas Concentrations within a Scots Pine Forest Atmosphere, 7, 125; doi:10.3390/atmos7100125, 2016.
- 790 Mohr, M., Laemmel, T., Maier, M., and Schindler, D.: Spatial variability of wind-induced air pressure fluctuations responsible for pressure pumping, *Tellus B.*: 69, 1361757, doi:10.1080/16000889.2017.1361757, 2017.
- Morris, P. H., Graham, J., and Williams, D. J.: Cracking in drying soils. *Canadian Geotechnical Journal*, 29, 263–277, doi:10.1139/t92-030, 1992.
- Myklebust, M. C., Hipps, L. E., and Ryel, R. J.: Comparison of eddy covariance, chamber, and gradient methods of measuring  
795 soil CO<sub>2</sub> efflux in an annual semi-arid grass, *Bromus tectorum*. *Agricultural and Forest Meteorology*, 148(11), 1894–1907, doi:10.1016/j.agrformet.2008.06.016, 2008.
- Nachshon U., Dragila, M., and Weisbrod, N.: From atmospheric winds to fracture ventilation: Cause and effect, *J. Geophys. Res.*, 117, G02016, doi:10.1029/2011JG001898, 2012.
- Nahlawi, H. and Kodikara, J. K.: *Geotech Geol Eng*, 24: 1641. doi:10.1007/s10706-005-4894-4, 2006.
- 800 Nakano T., Sawamoto, T., Morishita, T., Inoue, G., and Hatano, R.: A comparison of regression methods for estimating soil-atmosphere diffusion gas fluxes by a closed-chamber technique, *Soil Biology and Biochemistry*, Volume 36, Issue 1, January, Pages 107-113, doi:10.1016/j.soilbio.2003.07.005, 2004.
- Norman, J. M., Kucharik, C. J., Gower, S. T., Baldocchi, D. D., Crill, P. M., Rayment, M., Savage, K., and Striegl, R. G.: A comparison of six methods for measuring soil-surface carbon dioxide fluxes. *J. Geophys. Res.*, 102, 28771–28777,  
805 doi:10.1029/97JD01440, 1997.
- Oki, T and Kanae, S.: Global hydrological cycles and world water resources, *Science*, 313:1068–1072, doi:10.1126/science.1128845, 2006.
- Pal, D. K., Bhattacharyya, T., and Wani, S. P.: Formation and Management of Cracking Clay Soils (Vertisols) to Enhance Crop Productivity Indian Experience January 2012, *World Soil resources and Food Security Chapter 7*, CRC Press, Rattan Lal  
810 and B. A. Stewart, 2012.
- Pavelka, M., Sedlák, P., Acosta, M., Czerný, R., Taufarová, K., and Janouš, D.: Chamber techniques versus eddy covariance method during nighttime measurements, *International Scientific Conference, Slovakia, Štrelcová, K., Škvarenina, J. & Blaženec, M. (eds.)*, 2007.
- Pavelka, M., Acosta, M., Kiese, R., Altimir, N., Brümmer, C., Crill, P., Darenova, E., Fuß, R., Gielen, B., Graf, A.,  
815 Klemetsson, L., Lohila, A., Longdoz, B., Lindroth, A., Nilsson, M., Jiménez, S. M., Merbold, L., Montagnani, L., Peichl, M., Pihlatie, M., Pumpanen, J., Ortiz, P. S., Silvennoinen, H., Skiba, U., Vestin, P., Weslien, P., Janous, D., and Kutsch, W.: Standardisation of chamber technique for CO<sub>2</sub>, N<sub>2</sub>O and CH<sub>4</sub> fluxes measurements from terrestrial ecosystems, *Int. Agrophys*, 32, 569-587, doi:10.1515/intag-2017-0045, 2018.
- Péron, H., Laloui, L., and Hueckel, T.: Experimental evidence in desiccation cracking, *Advanced Experimental Unsaturated  
820 Soil Mechanics, Proceedings of Conference, Trento, Italy, April 2005*, 475–480, doi:10.1061/40802(189)87

- Philip J. R.: Evaporation, and Moisture and Heat Fields in the Soil, *Journal of Atmospheric Sciences*, vol. 14, Issue 4, 354-366, doi:10.1175/1520-0469(1957)014<0354:EAMAHF>2.0.CO;2, 1957.
- Pilgrim, D. H., Chapman, T. G., Doran, D. G., Problems of rainfall runoff modelling in arid and semiarid regions/Problèmes de la mise au point de modèles pluie-écoulement dans les 15 régions arides et semi-arides, *Hydrolog. Sci. J.* (1988), 33, 379–825 400
- Poulsen, T. G., Pourber, A., Furman, A., and Papadikis, K.: Relating wind-induced gas exchange to near-surface wind speed characteristics in porous media. *Vadose Zone J.*, 16(8), doi:10.2136/vzj2017.02.0039, 2017.
- Pourbakhthiar, A., Poulsen, T. G., Wilkinson S., and Bridge, J. W: Effect of wind turbulence on gas transport in porous media: experimental method and preliminary results, *European Journal of Soil Science*, 68, 48–56, doi: 10.1111/ejss.12403, 2017
- 830 Risk, D., Nickerson, N., C. Creelman, McArthur, G., and Owens, J.: Forced Diffusion soil flux: A new technique for continuous monitoring of soil gas efflux, *Agricultural and Forest Meteorology*, vol. 151, issue 12, pp. 1622-1631, doi:10.1016/j.agrformet.2011.06.020, 2001.
- Riou, C.: Evaporation du sol nu et répartition des pluies - Relations établies en Tunisie à partir des résultats des cases lysimétriques. *Annales de l'INRAT*, vol. 50, Fasc.4, INRAT, Tunisie, 24, Also published in *Cahiers de l'ORSTOM, Sér.*
- 835 *Hydrol.*, vol. XIV, no. 3, 285–295, [https://horizon.documentation.ird.fr/exl-doc/pleins\\_textes/pleins\\_textes\\_4/hydrologie/16730.pdf](https://horizon.documentation.ird.fr/exl-doc/pleins_textes/pleins_textes_4/hydrologie/16730.pdf), 1977.
- Rochette, P., Ellert, B., Gregorich, E. G., Desjardins, R. L., Pattey, E., Lessard, R., and Johnson, B. G.: Description of a dynamic closed chamber for measuring soil respiration and its comparison with other techniques, *Can. J. Soil. Sci.*, 77: 195-203, 1997
- 840 Rochette, P. and Hutchinson, G. L: Measurement of Soil Respiration in situ: Chamber Techniques, Publications from USDA-ARS / UNL Faculty. 1379, <https://digitalcommons.unl.edu/usdaarsfacpub/1379>, 2005.
- Roland, M., Vicca, S., Bahn, M., Ladreiter-Knauss, T., Schmitt, M., and Janssens, I. A.: Importance of nondiffusive transport for soil CO<sub>2</sub> efflux in a temperate mountain grassland, *J. Geophys. Res. Biogeosci.* (2015), 120, 502–512, doi:10.1002/2014JG002788.
- 845 Sánchez-Cañete, E.P., Oyonarte, C., Serrano-Ortiz, P., Curiel Yuste, J., Pérez-Priego, O., Domingo, F., and Kowalski A. S: Winds induce CO<sub>2</sub> exchange with the atmosphere and vadose zone transport in a karstic ecosystem, *J. Geophys. Res. Biogeosciences*, 121, doi:10.1002/2016JG003500, 2016.
- Satar, E., Berhanu, T. A., Brunner, D., Henne, S., and Leuenberger, M.: Continuous CO<sub>2</sub>/CH<sub>4</sub>/CO measurements (2012–2014) at Beromünster tall tower station in Switzerland, *Biogeosciences*, 13, 2623–2635, doi:10.5194/bg-13-2623-2016, 2016
- 850 Sauer T. J., Ochsner, T. E., and Horton, R.: Soil heat flux plates: Heat flow distortion and thermal contact resistance. *Agronomy Journal*, 99(1), 304–310, doi.org:10.2134/agronj2005.0038s, 2007.
- Schneider J., Kutzbach, L., Schulz, S., and Wilmking, M.: Overestimation of CO<sub>2</sub> respiration fluxes by the closed chamber method in low-turbulence nighttime conditions, *J. Geophys. Res.*, 114, G03005, doi:10.1029/2008JG000909, 2009.

- Schrier-Uijl, A. P., Kroon, P. S., Hensen, A., Leffelaar, P. A., Berendse, F., and Veenendaal, E. M.: Comparison of chamber and eddy covariance-based CO<sub>2</sub> and CH<sub>4</sub> emission estimates in a heterogeneous grass ecosystem on peat, *Agricultural and Forest Meteorology*, 150(6):825-831, doi:10.1016/j.agrformet.2009.11.007, 2010.
- Scotter, D. R. and Raats, P. A. C.: Dispersion of water vapor in soil due to air turbulence, *Soil Sci.*, Vol. 108, No. 8 170-176, Schmidt, G. A., Ruedy, R. A., Miller, R. L., and Lacis, A. A.: Attribution of the present-day total greenhouse effect, *J. Geophys. Res.* 2010 15 D20106, doi:10.1029/2010JD014287, 1968.
- Smits, K., Eagen, V., and Trautz, A.: Exploring the Effects of Atmospheric Forcings on Evaporation: Experimental Integration of the Atmospheric Boundary Layer and Shallow Subsurface. *J. Vis. Exp.*, 100, e52704, doi:10.3791/52704, 2015
- Stirling, R. A., Glendinning, S., and Davie, C. T.: Modelling the deterioration of the near surface caused by drying induced cracking, *Applied Clay Science*, 146 176–185, doi:10.1016/j.clay.2017.06.003, 2017.
- Suleau, M., Debacq, A., Dehaes, V., and Aubinet, M.: Wind velocity perturbation of soil respiration measurements using closed dynamic chambers, *European Journal of Soil Science*, 60(4):515 - 524, doi:10.1111/j.1365-2389.2009.01141.x, 2009.
- Suleman, K. F. and Shahid, A.: Determination of the desiccation behavior of clay slurries, *International Journal of Mining Science and Technology*, 27 981–988, doi:10.1016/j.ijmst.2017.06.010, 2017.
- Takle, E. S., Massman, W. J., Brandle, J. R., Schmidt, R. A., Zhou, X., Litvina, I. V., Garcia, R., Doyle, G., and Rice, C. W.: Influence of high-frequency ambient pressure pumping on carbon dioxide efflux from soil, *Agricultural and Forest Meteorology*, 124, Issues 3–4, 193-206, doi:10.1016/j.agrformet.2004.01.014, 2004.
- Tang, C. S., Shi, B., Liu, C., Zhao, L., and Wang, B.: Influencing factors of geometrical structure of surface shrinkage cracks in clayey soils. *Engineering Geology*, 101, 204–217, doi:10.1016/j.enggeo.2008.05.005, 2008.
- Tang, C. S., Cui, Y. J., Tang, A. M., and Shi, B.: Experiment evidence on the temperature dependence of desiccation cracking behavior of clayey soils. *Engineering Geology*, 114, 261–266, doi:10.1016/j.enggeo.2010.05.003, 2010.
- Thornthwaite, C. W. and Holzman, B.: Measurement of Evaporation from Land and Water Surfaces, *U.S. Dept. of Agri. Tech. Bull.*, 817, 143, 1942.
- Trenberth, K. E., Fasullo, J., Kiehl, J.: Earth's global energy budget. *Bull. Am. Meteorol. Soc.*, 90:311–323, doi:10.1175/2008BAMS2634.1, 2009.
- Wagner, W. and Pruß, A.: The IAPWS Formulation 1995 for the Thermodynamic Properties of Ordinary Water Substance for General and Scientific Use, *Journal of Physical and Chemical Reference Data*, June 2002, Volume 31, Issue 2, pp. 387535, doi:10.1063/1.1461829, 2002.
- Wang, X.: Vapor Flow Resistance of Dry Soil Layer to Soil Water Evaporation in Arid Environment: An Overview, *Water*, 7, 4552-4574 doi:10.3390/w7084552, 2015.
- Wilcox, B., Seyfried, M., Breshears, D.: The water balance on rangelands, *Encyclopedia of water science*, 791–794, doi:10.1081/E-EWS-120010097, 2003.
- Wilson, G. W., Fredlund, D. G., Barbour, S. L.: Coupled soil-atmosphere modelling for soil evaporation. *Canadian Geotechnical Journal*, 31(2): 151-161, doi:10.1139/t94-021, 1994.

Wilson: G. W., Fredlund, D. G., and Barbour, S. L.: The effect of soil suction on evaporative fluxes from soil surfaces, Canadian Geotechnical Journal, 34(1):145-155, doi:10.1139/cgj-34-1-145, 1997.

890 Xu, L., Furtaw, M. D., Madsen, R. A., Garcia, R. L, Anderson, D. J., and McDermitt, D. K.: On maintaining pressure equilibrium between a soil CO<sub>2</sub> flux chamber and the ambient air, J. Geophys. Res., 111, D08S10, doi:10.1029/2005JD006435, 2006.

Zha, T., Niinisto, S., Xing, Z., Wang, K. Y., Kellomäki, S., and Bar, r A. G.: Total and component carbon fluxes of a Scots pine ecosystem from chamber measurements and eddy covariance, Ann Bot., 99(2), 45-53, doi:10.1093/aob/mcl266, 2007.

895

## Appendix A: Laboratory measured soil evaporation *RE*

The calibration process requires extensive and comprehensive real soil evaporation measurements. Preceding *RE* measurement data, two interesting points were remarked and are briefly reported at the margin: exponential evaporation behavior for both  
900 soils in the second evaporation stage and a common point in the clayey soil.

### A.1 Real evaporation *RE* on the second stage

Soil evaporation is well known and admitted to be able to be divided into three stages. (Introduced by Philip 1959, Wilsdon et al. 1994 or Hiller 2004). Wet soil, water-saturated or near water-saturated, evaporates at a constant rate depending greatly on the wind. With progressively drying soil, a second stage appears after the so-called air entry value (AEV) and shows the  
905 smallest wind dependence. A third stage concerns very dry soils with a constant extremely low evaporation rate and was not truly observed in this study except the zero-wind sand evaporation record, which took over two months of constant monitoring. To compare measurements under different wind speeds, such as the real evaporation from sandy and clayey soils, a semilogarithmic scale versus soil moisture is probably the most relevant method (Fig. A1). In these figures, we can notice that regarding the sand, the first stage is important compared to the clayey soil, where the evaporation quickly falls to the second  
910 stage. This behavior is characteristic of relatively low-rate evaporation on sandy soil (Holmes 1961). The second stage displays a very linear behavior for the sand and for the clayey soil on the logarithmic scale: in the second stage, the evaporation rate is an exponential function of the soil moisture  $w$ .

$$RE_{Second\ Stage} = C(w_s) * e^{D*w} \tag{A1}$$


915

where C depends slightly on the wind speed, and D is a constant almost independent of the wind speed for sandy soil.


Indeed, regarding sandy soil, regardless of the wind, the slopes are the same, and the curves are parallel but remain slightly wind-affected since they are not superimposed.

920 For the clayey soil, the second stage evaporation rates are higher for the higher wind. There is a visible common point where the evaporation rates are the same regardless of the wind. For a lower moisture, the curves clearly diverge as the slopes are different. The common point existence is discussed in the next section.

The difference between sandy soil and clayey soil drying processes is certainly affected by the micro- and later macrodesiccation crack appearances in clayey soils (Lau 1987, Morris et al. 1992, Kodikara 2002). These cracks may be  
925 considered an effective soil/air interface surface increase and then an additive water vapor exchange surface that may significantly increase the evaporation rate under wind (Nachshon et al. 2012). Another difference between these soils is the grain size difference and then intergrain void space and the resulting matrix suction amplitude, as discussed later in this paper.

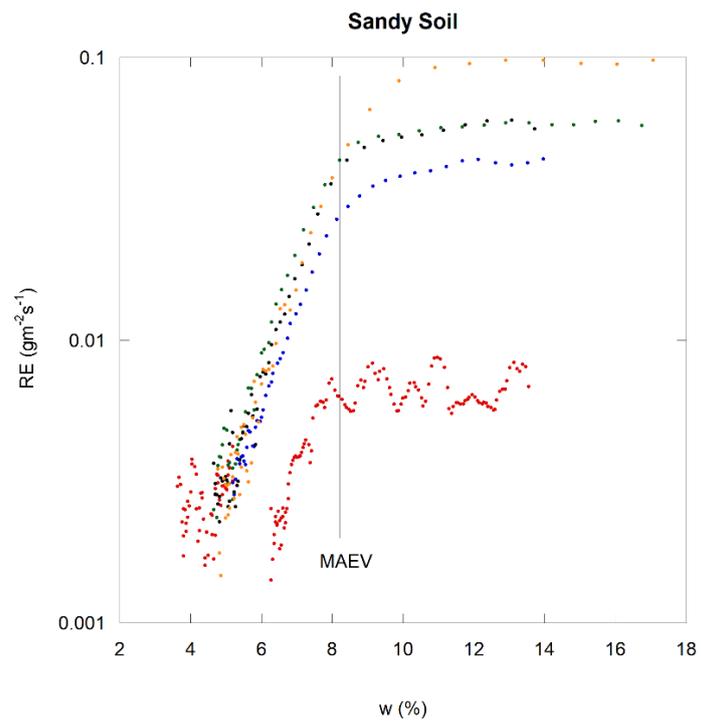

(a)

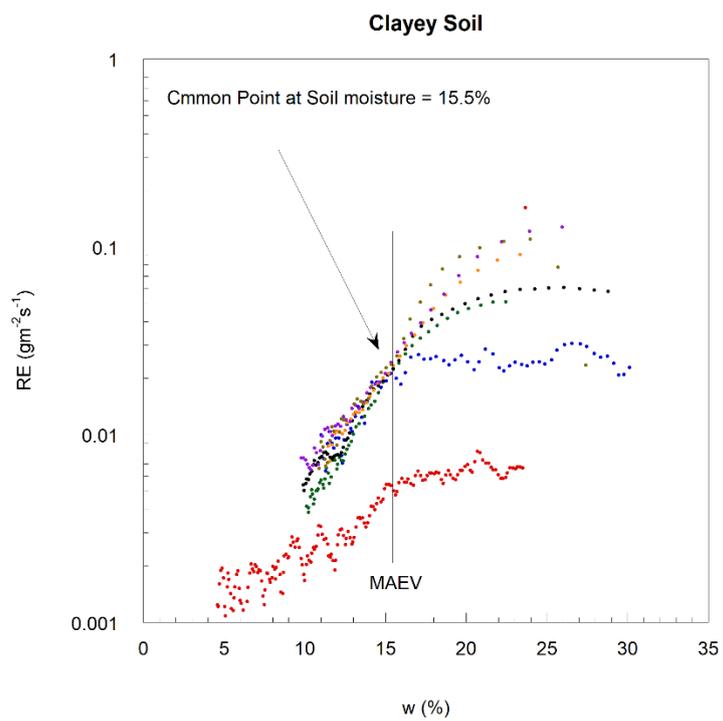

(b)

935 **Figure A1: Real evaporation versus gravimetric soil moisture a) for sandy soil and b) for clayey soil at several wind speeds.**

### A.2 Clayey soil cracking and common point.

Crack formation in drying clayey soil, also called desiccation soil cracks, has a great influence on the total evaporation up to 50% enhancement according to Hatano et al. (1988), and under windy conditions, the total evaporation may even be increased  
940 by two orders of magnitude (Nachshon et al. 2012). This phenomenon is widely studied and relatively well documented, as its consequences for engineering (Lytton et al. 1976; Daniel et al. 1993; Kodikara et al. 2002; Rodriguez et al. 2007; Stirling et al. 2017) and agriculture (Pal et al. 2012; Kurtzman et al. 2016) are very important. Figure A2 shows the clayey soil sample in its dry state; (a) dried under a moderate wind, (b) dried under no wind. During this study, different crack patterns were obtained with different wind speeds and drying ratios. An obvious wind importance effect on the cracking pattern was noticed.  
945 The cracks are more numerous with higher wind in accordance with existing studies (Corte and Higashi, 1960; Tang et al. 2008 and 2010; Costa et al. 2013), and the coarsest cracks are always in accordance with previous studies (Corte and Higashi, 1960; Lau, 1987; Kodikara et al. 2000; Nahlawi and Kodikara, 2006; Tang et al. 2008 and 2010; Costa et al. 2013) due to an important matrix suction increase with the drying ratio in clayey soil. This is a part of so-called *dynamic effects*. The studied clayey soil sample can lose up to 15% of its initial volume, and its observation drying under different wind speeds allows us  
950 to point out an interesting finding, which is the existence of a common point (*CP*) and a change in the evaporation ratio versus soil moisture slope below this point under all wind speeds but nil. The clayey soil sample cracks under wind but drying as a whole block, almost without cracks, under calm conditions (Fig. A1(b)), creating a void space between the soil block and the bucket wall.

*CP* corresponds to a well-defined *RE* of approximately  $0.024 \text{ gm}^{-2}\text{s}$  at a soil moisture  $w$  of approximately 15.5%. *CP* also  
955 corresponds to the *RE* versus  $w$  slope change for drying soil. At the current research advancement point, one can only propose a hypothesis to explain this phenomenon tied with the clayey soil matrix air entry value (MAEV) corresponding to air seepage through the soil matrix, but the present study does not allow us to prove it. Soil *RE* slows down as the soil moisture decreases; however, in the swelling clayey soil case, the soil moisture decreases cause microcracks and hollow formation, depending on the expansive clay content (smectite minerals, including montmorillonite and bentonite) and, more precisely, its vertisol  
960 character (Ahamad 1996; Everest et al. 2016), increasing the effective soil/atmosphere interaction surface (Bronswijk 1988). This fact agrees with a relatively less pronounced transition between the first and second stages of evaporation observed in clayey soil versus sandy soil (Fig. A1). As the importance of the wind influence on the *RE* goes together with the interaction surface, any change in the latter is visible in the former. Crack formation in the soil would increase *RE* by changing the *RE* versus  $w$  ratio and may then explain the apparent slope change observed in Fig. A1 (b). However, the cracks transform the soil  
965 sample to a fractured medium and are visible well before the *CP* point, as shown by Song et al. (2016). Cracking forms a so-

called cracking air entry value (*CAEV*) on the moistest, almost saturated, clayey soil, and their formation is progressive, which is rather incompatible with a brusque slope change. The concerned soil moisture point *CP* seems to correspond rather to a soil matrix air entry value (Azam et al. 2013) below which the soil acts as a porous medium. The crack formation causing the first *AEV* (*CAEV*) on a soil moisture characteristic curve is followed by the matrix *AEV* (*MAEV*) formation on a drier soil and is very similar to a bimodal grain-size distribution curve (Satyanaga et al. 2013), where grains of both large and small sizes are present in the soil with then two intergrain void space sizes. These two points, cracks and matrix *AEV*, occur in a drying clayey under the wind before the final void ratio stabilization (Péron and Laloui 2005) and affect an evaporation ratio that is one order of magnitude larger than the order of magnitude of no wind evaporation. Since, under no wind, the *CP* is not visible, one can deduce that cracks and/or wind presence are necessary

975



(a)



(b)

980

**Figure A2: Dried clayey soil surface after drying under (a) moderate wind of  $0.8 \text{ ms}^{-1}$ , and (b) no wind.**

## Appendix B: Slow sensor simulation

985 The response of a slow sensor to step-like variations in physical variable  $S$  is usually very close to an exponential rise evolution between the initial value  $M_0$  and the final value  $M_f$  and characterized by the characteristic time  $\tau_m$  (see Eq. 3). If the measured variable also follows a known exponential law (characteristic time  $\tau_s$ , to simulate the slow sensor-provided signal), one can proceed by discretization dividing the considered time interval into several equal short intervals  $\Delta t$ . For example, if the considered physical variable evolution takes 100 s, we can start a simulation working with  $\Delta t = 1$  s.

Then, for each interval, we can calculate the real signal amplitude:

$$990 \quad S_i = A e^{-t_i/\tau_s} + B \quad (\text{B1})$$


In equilibrium at the beginning,  $M_0 = S_0$ , the sensor will follow the real signal  $S$  evolutions with some delay deforming it. For each time interval, we can approximate its measurement evolution as an exponential rise evolution between the last reached state and a new state.

$$995 \quad M_i = S_i - (S_i - M_{i-1}) e^{-\Delta t/\tau_m}. \quad (\text{B2})$$

1000 As the results are dependent on  $\Delta t$  magnitude, this interval can be made increasingly smaller, for example, dividing it by 2 each time. With progressively smaller intervals  $\Delta t$ , each simulation will give results that became stable and do not change notably. At this time, we can consider the results accurate.

1005 Figure B1 shows a simulation of a slow sensor ( $\tau_m = 10$ s) that measures an exponential rise-like signal ( $\tau_s = 30$ s) fitted by an exponential rise adjustment. The insert represents a zoom of the initial variations. The calculated fluxes are the product of the variation amplitude (asymptotic level less initial level) by the initial slope. The fit of slow sensor measurements has a lower slope, but the adjustment optimization process tends to overestimate the variation amplitude. There is a local maximum of that product. That is, a moderately slow sensor may lead to an overestimation of the flux.

In Fig. B1, we can see the three intersections between the measured signal and the fit, which are used to settle the second fitted interval, as shown in Fig. 02.

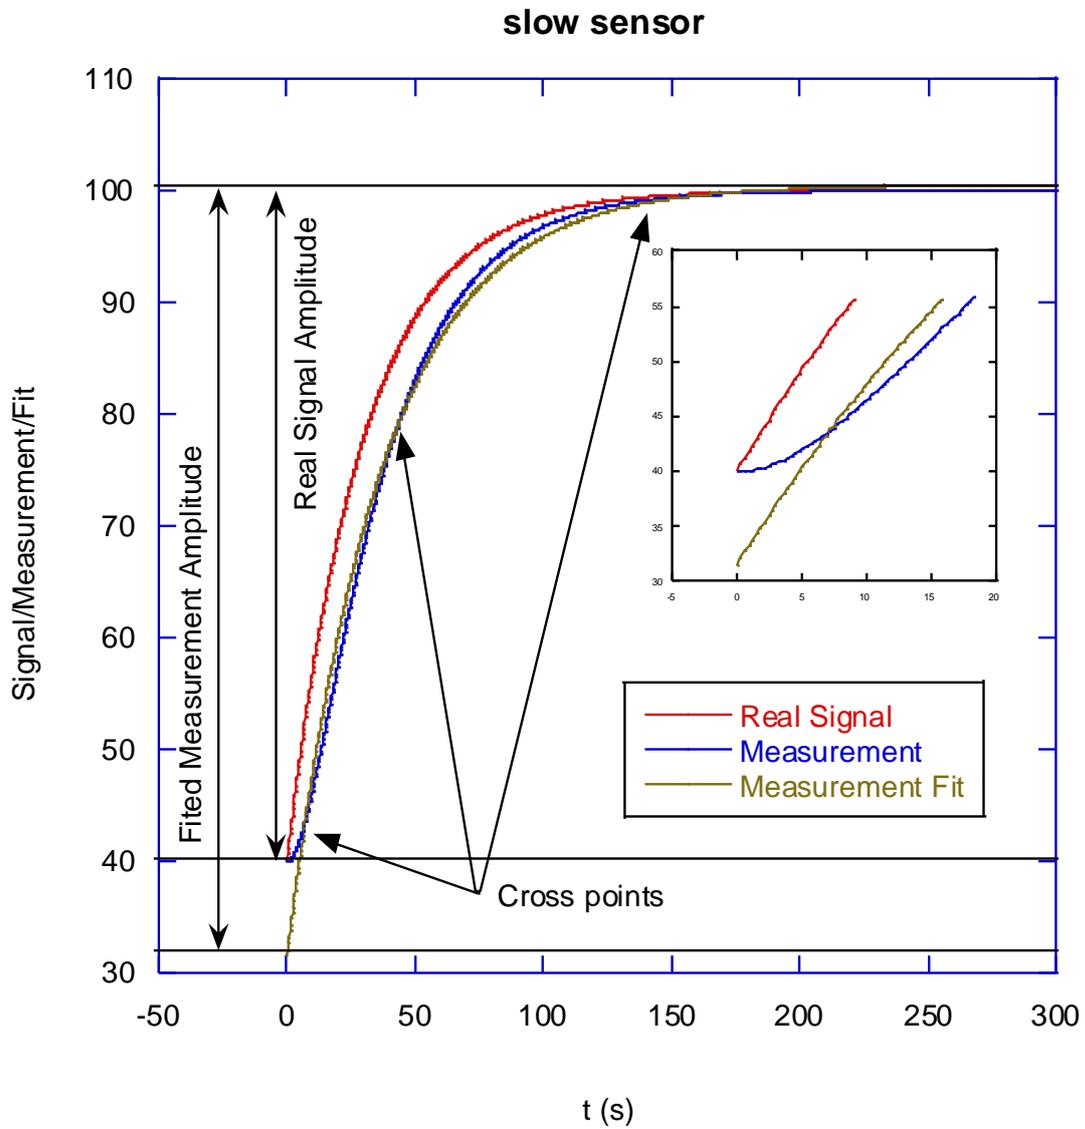

1010

**Figure B1: Real exponential rise-like signal, simulated slow sensor measurements and exponential rise fit of the measurements. Insert depicts the zoom of the initial variations.**