

# Feasibility of Irrigation Monitoring with Cosmic-ray Neutron Sensors

Cosimo Brogi<sup>1</sup>, Heye Reemt Bogena<sup>1</sup>, Markus Köhli<sup>2</sup>, Johan Alexander Huisman<sup>1</sup>, Harrie-Jan Hendricks Franssen<sup>1</sup>, Olga Dombrowski<sup>1</sup>

<sup>1</sup>Agrosphere Institute (IBG-3), Forschungszentrum Jülich GmbH, 52425 Jülich, Germany

5 <sup>2</sup>Physikalisches Institut, Heidelberg University, Heidelberg, Germany

*Correspondence to:* Cosimo Brogi (c.brogi@fz-juelich.de)

**Abstract.** Accurate soil moisture (SM) monitoring is key in irrigation as it can greatly improve water use efficiency. Recently, Cosmic-Ray Neutron Sensors (CRNS) have been recognized as a promising tool in SM monitoring due to their large footprint of several hectares. CRNS also have great potential for irrigation applications, but few studies have investigated whether irrigation monitoring with CRNS is feasible, especially for irrigated fields with a size smaller than the CRNS footprint. Therefore, the aim of this study is to use Monte Carlo simulations to investigate the feasibility of monitoring irrigation with CRNS. This was achieved by simulating irrigation scenarios with different field dimensions (from 0.5 ha to 8 ha) and SM variations between 0.05 and 0.50 cm<sup>3</sup> cm<sup>-3</sup>. Moreover, the energy dependent response functions of eight moderators with different high-density polyethylene (HDPE) thickness or additional gadolinium thermal shielding were investigated. It was found that a considerable part of the neutrons that contribute to the CRNS footprint can originate outside an irrigated field, which is a challenge for irrigation monitoring with CRNS. The use of thin HDPE moderators (e.g., 5 mm) generally resulted in a smaller footprint and thus stronger contributions from the irrigated area. However, a thicker 25 mm HDPE moderator with gadolinium shielding improved SM monitoring in irrigated fields due to a higher sensitivity of neutron counts with changing SM. This moderator and shielding set-up provided the highest chance of detecting irrigation events, especially when the initial SM was relatively low. However, variations in SM outside a 0.5 or 1 ha irrigated field (e.g., due to irrigation of neighbouring fields) can affect the count rate more than SM variations due to irrigation. This suggests the importance of retrieving SM data from the surrounding of a target field to obtain more meaningful information for supporting irrigation management, especially for small irrigated fields.

## 25 1 Introduction

A reduction in soil moisture (SM) availability can negatively affect crop health, which is why irrigation is often employed to prevent yield reduction and crop failure connected to droughts and heat waves (Kukul and Irmak, 2019; Siebert et al., 2017; Tack et al., 2017; Webber et al., 2016; Zaveri and Lobell, 2019). Worldwide, ~25 % of the cropped land is irrigated (Rost et al., 2008) to increase food production and stabilize yields, especially in arid and semiarid regions (Kamali et al., 2022; Troy et al., 2015). It is predicted that water scarcity will be a key challenge in ensuring food security in the light of expected climate change (Elliott et al., 2014; Molden, 2013; Pisinaras et al., 2021). To meet this challenge, improvement of water use efficiency in irrigation is crucial (Abioye et al., 2020; Adeyemi et al., 2017). This can be achieved, for example, through an accurate monitoring of SM in space and time (Vereecken et al., 2008). Sensors that monitor SM variations are generally either large-scale remote sensing techniques that only sense shallow soil depths and are strongly influenced by vegetation and surface roughness (Bogena et al., 2010; Wagner et al., 2007; Walker et al., 2004), or point-scale instruments that only offer local information (Mohanty et al., 2017). Recently, Cosmic-Ray Neutron Sensors (CRNS) have been identified as a promising method to close the gap between point- and large-scale measurements of SM due to their large footprint of tens of hectares (Bogena et al., 2015; Heistermann et al., 2021).

CRNS detect neutrons that are produced by natural cosmic radiation. The amount of epithermal neutrons is known to be negatively correlated with the abundance of hydrogen atoms near the soil surface, and thus with the SM nearby the CRNS (Desilets et al., 2010; Köhli et al., 2021; Zreda et al., 2008; Zreda et al., 2012). CRNS are not only sensitive to SM but also to snow cover (Bogena et al., 2020; Schattan et al., 2017) and, to a generally lesser degree, vegetation (Baatz et al., 2015), atmospheric water vapour (Rosolem et al., 2013), and intercepted water in the canopy and lattice water (Bogena et al., 2013).

The accuracy of CRNS- based SM estimates is thus affected by environmental conditions. For example, the environmental neutron density and thus the count rate is higher for dry soils, which results in more accurate measurements compared to wet soils (Bogena et al., 2013; Desilets et al., 2010). Instrument design and set-up can also affect the accuracy of CRNS measurements of SM. Recent sensor developments have focused, for example, on enhancing neutron count rates to obtain a higher temporal resolution for SM estimation. This can be achieved with larger sensors or by using multiple counter tubes (Chrisman and Zreda, 2013; Schrön et al., 2018b). Additionally, neutrons detected by CRNS are generally in the thermal (below 0.5 eV) or epithermal (0.5 eV to 0.5 MeV) energy regime (Weimar et al., 2020), with the former having smaller footprint and penetration depth as well as different sensitivity to SM and biomass (Jakobi et al., 2021; Jakobi et al., 2022). To enhance the detection of epithermal neutrons, the energy sensitivity (i.e., energy dependent response function) of a CRNS (Köhli et al., 2021) can be shifted towards the epithermal energy range by using a high-density polyethylene (HDPE) moderator (Desilets et al., 2010; Weimar et al., 2020). In addition, a gadolinium-based (Ney et al., 2021) or cadmium-based (Andreasen et al., 2016) shielding can be used to prevent the detection of thermal neutrons (Desilets et al., 2010).

60 A CRNS provides SM information for an area of several tens of hectares and tens of centimetres deep into the soil (Köhli et al., 2015). Compared to point-scale SM monitoring sensors, a CRNS is non-invasive, offers passive and continuous measurements with relatively high temporal resolution, requires low maintenance (Schrön et al., 2018b), and is invariant to certain environmental variables such as soil temperature (Finkenbiner et al., 2019). In the context of agricultural applications, a CRNS can be placed in between or out of the way of routine production practices. It consequently does not present the logistic challenges associated with networks of directly inserted sensors, which need to be removed and reinstalled during harvest, planting, and other management actions (Franz et al., 2016). CRNS applications have increased rapidly in recent years, including validation of satellite-based remote sensing products (Montzka et al., 2017) and improvement of hydrological and land-surface model predictions (Baatz et al., 2017; Shuttleworth et al., 2013) among many other applications. In the upcoming years, additional coverage, real-time data availability, and rover-based measurements are expected to further increase the use of CRNS (Dong et al., 2014; Jakobi et al., 2020), for example to study prolonged droughts or flood events (Bogena et al., 2022).

70

Cosmic-ray neutron sensing has shown potential for monitoring and informing irrigation (Franz et al., 2020). However, the most accurate results are obtained in environments where SM within the footprint is rather homogeneous (Schrön et al., 2017). Although Franz et al. (2013) indicated a rather small effect of horizontal SM heterogeneity on CRNS measurements under natural conditions, individual areas with contrasting SM can be wrongly represented by a single CRNS (Badiie et al., 2021; Schattan et al., 2019; Schrön et al., 2022; Schrön et al., 2018a). Sub-footprint heterogeneity can be reconstructed using multiple instruments, but this comes with increased costs and necessitates further assumptions regarding spatial continuity (Heistermann et al., 2021). As a result, it can be difficult to distinguish local SM variations (Francke et al., 2022), such as the difference between the SM in a small irrigated field and its surroundings. Despite such limitations, Ragab et al. (2017) reported that CRNS measurements were useful for monitoring soil moisture deficit in the root zone and Finkenbiner et al. (2019) found that information obtained from combined CRNS measurements and electrical conductivity surveys could improve water use efficiency in a field irrigated with a centre pivot system in Nebraska (USA). In addition, Baroni et al. (2018) reported a clear response of CRNS to irrigation, although quantification of single irrigation events was not possible due to effects of precipitation and irrigation of nearby fields. In the case of drip irrigation, where the irrigated area is only a small portion of the volume sensed by the CRNS, the detection of irrigation-related SM variations can be more challenging. Li et al. (2019) were not able to accurately monitor drip irrigation with a standard CRNS in a citrus orchard in Spain. This was a consequence of the relatively small area wetted by drip irrigation, which resulted in a small mean SM change in the instrument footprint. However, better results could be achieved in irrigated fields with a larger wetted area, in drier regions, and for longer and more intense irrigation periods as well as by using instruments with higher count rates. These previous studies highlight that it is currently not clear if CRNS can be used as an accurate stand-alone tool in irrigation management. In particular, the effects of the dimension of the irrigated area, SM variation due to irrigation, and the design of the sensor are largely unaddressed.

80  
85  
90

Within this context, the aim of this study is to analyse the feasibility of CRNS-based SM monitoring in irrigated environments. To achieve this, neutron transport and detection in irrigated environments was investigated with physics-based Monte Carlo simulations. These are widely used in CRNS studies (Andreasen et al., 2016) that are focused on, for example, the description of the footprint characteristics (Zreda et al., 2008) and the local site arrangement and instrument calibration strategies (Desilets and Zreda, 2013; Schrön et al., 2017). In this study, the Ultra Rapid Adaptable Neutron-Only Simulation (URANOS) model developed by Köhli et al. (2015) was used. Simulations were performed for five different dimensions of irrigated areas (i.e., 0.5, 1, 2, 4, and 8 ha) and SM variations between  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  and  $0.50 \text{ cm}^3 \text{ cm}^{-3}$  both within and outside the irrigated area. To evaluate how detector design can help to improve irrigation monitoring, the energy dependent response functions of eight different moderators were also considered. The analysis of this set of Monte Carlo simulations allowed us to investigate the effect of different moderators, dimensions of the irrigated area, and SM variations inside and outside the irrigated area on CRNS-based irrigation monitoring.

## 2 Materials and methods

### 2.1 Soil moisture monitoring with CRNS

CRNS measure SM by detecting the environmental neutron density produced by cosmic radiation, which is inversely related with below- and aboveground hydrogen pools that surround the sensor. These environmental neutrons have different energies depending on the amount and type of interactions that have occurred. Primary cosmic rays with energies around 1 GeV generate high-energy (larger than 20 MeV) neutrons in the atmosphere. By interacting with heavy atoms, these neutrons lose energy and become fast neutrons (0.5 to 20 MeV). The energy of these fast neutrons is further reduced by elastic collisions with lighter atoms (generally hydrogen), first to the epithermal regime (0.5 eV to 0.5 MeV), and finally to a thermal equilibrium (below 0.5 eV). CRNS typically measure neutrons in the thermal to fast energy regimes (Köhli et al., 2021; Weimar et al., 2020). The measured neutron flux is affected by multiple hydrogen pools, such as soil water, water bodies, lattice water, and biomass. Typically, the CRNS signal is mainly controlled by SM variations, but the additional hydrogen pools can strongly influence the accuracy of the SM estimates (Baatz et al., 2015; Baroni et al., 2018; Iwema et al., 2021; Jakobi et al., 2020; Zreda et al., 2012). Generally, a CRNS is composed of one or more neutron detectors that can be bare (thermal-epithermal neutron detection) or moderated with HDPE (epithermal to fast neutron detection). More detailed information on the main detector components and physics can be found in Zreda et al. (2012), Schrön et al. (2018b), and Weimar et al. (2020).

### 2.2 CRNS footprint and penetration depth

The quantitative description of the horizontal area over which a CRNS measures is named footprint. Detected neutrons that had no contact with the ground (non-albedo neutrons) are, by definition, excluded from the footprint calculation. Thus, the footprint only depends on detected neutrons that had contact with the ground (albedo neutrons). Since CRNS cannot detect the origin of a neutron and whether it had contact with soil nuclei, the footprint is generally obtained via neutron transport

simulations. Although some studies suggested an asymmetric or “amoeba-like” footprint (Schattan et al., 2019; Schrön et al., 2022), most studies assume a simplified circular footprint that depends on the Euclidean distance between the points where  
125 neutrons had first contact with the ground and the point of detection. A quantile definition is widely used to define a distance  
within which most detected neutrons originate (Desilets and Zreda, 2013; Zreda et al., 2008). Commonly used radii are the  
one  $e$ -folding length (~63% of neutrons) and the two  $e$ -folding length (~86% of neutrons). The footprint varies depending on  
environmental conditions and instrument characteristics (Schrön et al., 2017). Monte Carlo simulations showed that the two  
 $e$ -folding footprint (R86) is ~240 m in fully dry conditions and is reduced by up to 40% with increasing SM and, to a lesser  
130 degree, with variations in humidity, vegetation, and other environmental variables (Köhli et al., 2015). The penetration depth  
of a CRNS also depends on SM and is higher below the instrument where it ranges between 83 and ~15 cm (Köhli et al., 2015)  
depending on SM. The characterization of the CRNS support volume in terms of footprint and measurement depth is a complex  
and ongoing research subject (Schrön et al., 2022), as shown by a range of recent simulation and field studies that further  
investigated the spatial sensitivity of SM determined with CRNS (Badiee et al., 2021; Francke et al., 2022; Schrön et al., 2017)  
135 as well as the footprint of thermal neutrons (Jakobi et al., 2021).

### 2.3 Neutron transport modelling with URANOS

The URANOS model, which is freely available online (<http://www.ufz.de/uranos>), was used in this study. This model was  
first developed to address neutron-only interactions and was later adapted to the cosmic-ray neutron problem (Köhli et al.,  
2015). URANOS is based on a Monte Carlo approach for the simulation of neutron transport and interactions with matter  
140 (Köhli et al., 2018). It is tailored to the study of neutron transport in environmental science and thus certain processes such as  
gamma cascades or fission are neglected or represented by effective models. This reduces the computational effort and  
generally allows the simulation of a larger number of neutrons, which results in more accurate simulations (Köhli et al., 2015).  
In URANOS, neutrons are emitted from point sources that are randomly distributed within a user-defined source layer with  
energies sampled from a realistic spectrum matching that of the Earth's atmosphere (Sato, 2015). Then, URANOS uses a  
145 standard calculation routine that features a ray-casting algorithm for single neutron propagation and tracks the relevant physical  
interactions for millions of neutrons (e.g., elastic collisions, inelastic collisions, absorption, and emission processes such as  
evaporation). URANOS follows the ENDF (Evaluated Nuclear Data File) database standard implementations from Romano  
and Forget (2013) with cross-sections, energy distributions, and angular distributions obtained from the datasets of Chadwick  
et al. (2011) and Shibata et al. (2011).


### 150 2.4 Simulation setup

The model domain in URANOS was composed of six (or seven) layers: one (or two) soil and five atmospheric layers. The soil  
layer extended to 1.6 m depth. The atmospheric layers extended from the soil surface to 1000 m height. The thickness of the  
five layers was 2, 0.5, 47.5, 30, and 920 m from the bottom to the top layer. The fourth layer was the source layer (from 50 to  
80 m above the soil surface, respectively). The pressure of the atmosphere and of the air in the porous media were set to 1020

155 hPa. A humidity of  $3 \text{ g cm}^{-3}$  and a composition of 78% nitrogen, 21% oxygen, and 1% argon were assumed. The soil bulk density was set to  $1.43 \text{ g cm}^{-3}$  and the porosity was set to 50%.

The simulation domain was  $1200 \times 1200 \text{ m}$  (144 ha) with a resolution of 1 m. It was divided in two areas: a) a square area at the centre of the domain with five different dimensions (i.e., 0.5, 1, 2, 4, and 8 ha) and b) the surrounding area. The SM in the inner and in the outer areas was modified independently with increments of  $0.05 \text{ cm}^3 \text{ cm}^{-3}$ . Additionally, a 1 ha circular area and a 1 ha rectangular area ( $142 \times 70 \text{ m}$ ) were simulated with SM variations in the inner area from 0.05 to  $0.35 \text{ cm}^3 \text{ cm}^{-3}$ . These SM variations were applied homogeneously (both vertically and horizontally) within each area. Finally, for a 1 ha square inner area, simulations with two soil layers were produced where the SM variation was applied only in the top 10 cm or 30 cm of soil. As in the previous circular and rectangular area scenarios, SM in the inner area varied from 0.05 to  $0.35 \text{ cm}^3 \text{ cm}^{-3}$ . Figure 165 1 conceptually describes the simulation strategy taking the 8 ha scenario as an example. A first simulation is performed with a uniform SM of  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  in both inner and outer areas. Then, the SM is varied either in the inner area, the outer area, or in both areas. This results in 100 simulations with different SM combinations for each scenario, and a total of 500 simulations. For each simulation,  $10^8$  neutrons were used as this provided sufficient precision and a reasonable computation time (Köhli et al., 2015).

170

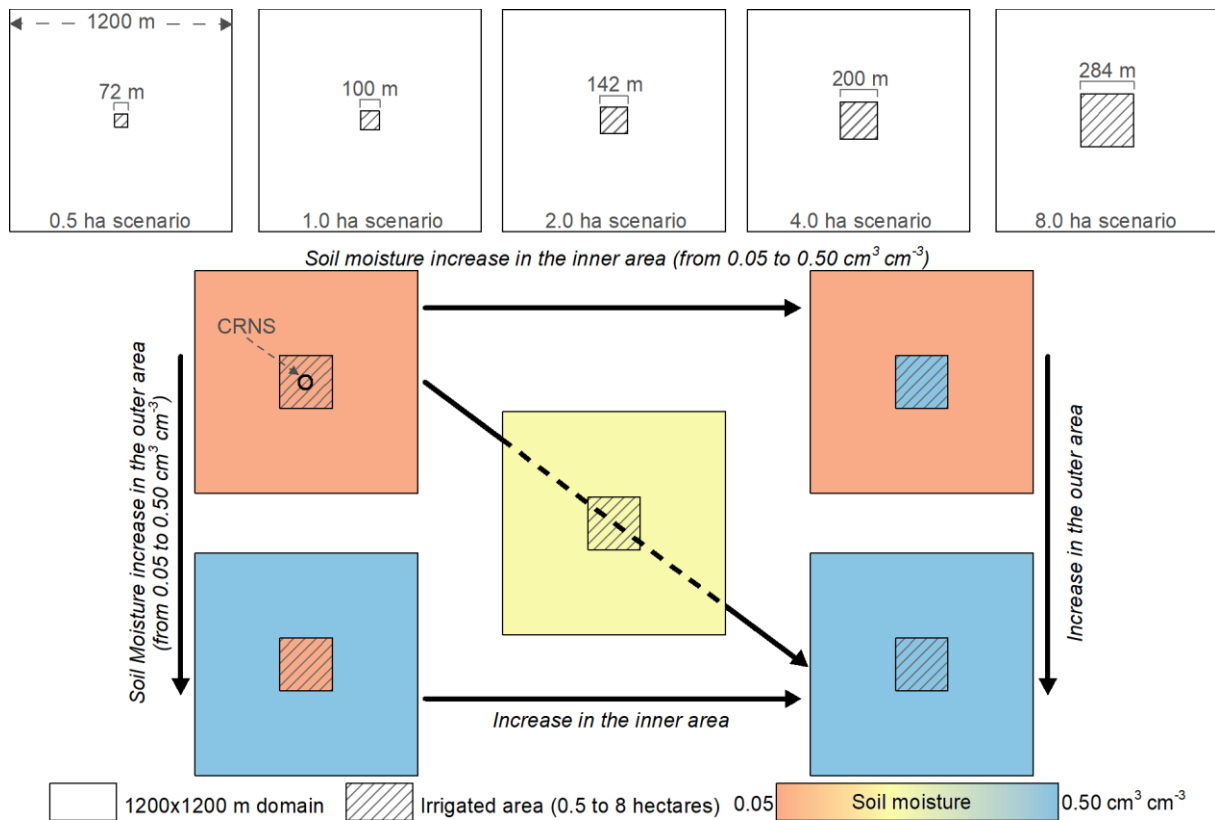

**Figure 1: Examples of the dimensions of the inner area relative to the simulation domain and schematization of the simulation design and setup with an example for the 8 ha scenario. A 1200x1200 m domain is used with an inner area of 8 ha and a CRNS placed at its centre. The SM is then systematically varied in the inner and outer area with increments of  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  for a total of 100 simulations.**


175

## 2.5 Investigated moderators and their energy-dependent response functions

Each simulation provided information on the simulated neutrons that crossed the detector at the centre of the domain (e.g., energy at detection, coordinates of first soil contact). The detector was a vertical cylinder of 9 m radius positioned in the second atmospheric layer (2 to 2.5 m aboveground) and at the centre of the simulation domain. However, not all neutrons that pass through the detector tube are detected, whereby the probability of detection depends on neutron energy and direction, as well as on sensor characteristics such as the used conversion gas, geometrical configuration, and moderator type (Köhli et al., 2018). Different moderators are commercially available and are typically made of HDPE of various thicknesses. In this study, we investigated the use of 5, 10, 15, 20, 25, 30, and 35 mm HDPE moderators. Furthermore, an additional gadolinium oxide ( $\text{Gd}_2\text{O}_3$ ) shield was investigated for a moderator composed of 25 mm HDPE. As it was proposed by Desilets et al. (2010), a 25 mm HDPE moderator thickness was selected for the detector shielded with gadolinium. This is supported by Weimar et al. (2020), who found only small differences in response for moderator thicknesses of 20 to 27.5 mm HDPE with gadolinium shielding. Thus, the combination of gadolinium shielding with other moderator thicknesses was not considered. The energy

185

dependent response functions of the investigated moderators as reported by Köhli et al. (2018) are shown in Figure 2. Detectors with thin HDPE moderators (e.g., 5 mm HDPE) are highly sensitive to thermal neutrons while detectors with thicker moderators have a higher sensitivity to epithermal neutrons. The 25 mm HDPE moderator with gadolinium shielding has similar sensitivity to epithermal neutrons as the non-shielded variant but shows less sensitivity to thermal neutrons (Köhli et al., 2018; Weimar et al., 2020). In fact, such shielding can absorb and thus prevent the detection of more than 90% of the incoming thermal neutrons (Ney et al., 2021), which have a smaller footprint and different sensitivity to SM than epithermal neutrons (Jakobi et al., 2021; Jakobi et al., 2022; Rasche et al., 2021). A cubic spline of each response function was applied to the output of each simulation and a weight was assigned to each neutron depending on its energy at detection. Then, these weights were summed to obtain the number of detected neutrons and subsequently used in a weighted calculation of the R86. The effect of the angular distribution of the neutrons was not considered here as it was assumed to be negligible, which is reasonable given the absence of changes (e.g., vegetation, atmospheric pressure, humidity) in the vicinity of the detector.

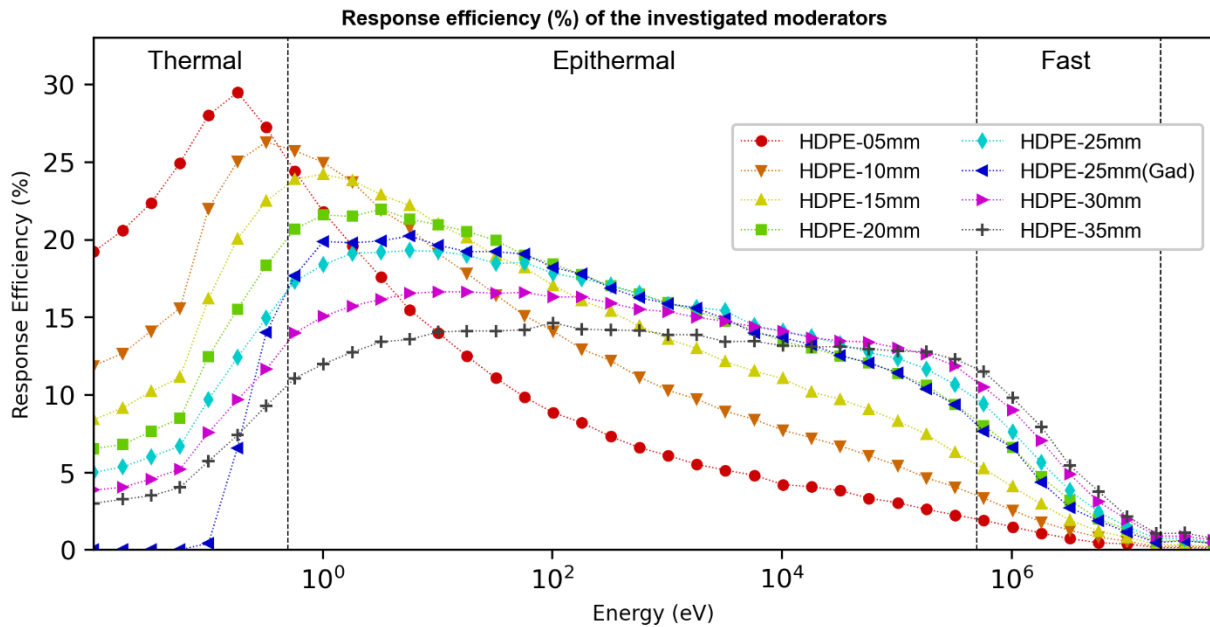

**Figure 2: Energy dependent response functions of different moderators made of 5 to 35 mm thick high-density polyethylene (HDPE) and, in the case of 25mm HDPE, an additional gadolinium based thermal shielding.**

## 2.6 Investigation of the feasibility of irrigation monitoring with CRNS

The changes of R86 due to SM variations in the inner and outer areas as well as the use of different moderators were analysed. Although a footprint description that relies on a single value can be misleading (Badiee et al., 2021; Schrön et al., 2022), the R86 represents a standard in CRNS applications and was thus selected to investigate the simulations of this study. Here, the initial hypothesis is that a relatively small R86 is beneficial when monitoring irrigation in small fields as a lower contribution from the surrounding area could be expected. To analyse the Monte Carlo simulation runs, the detected neutrons in each



simulation were divided in two types: albedo and non-albedo neutrons. Albedo neutrons carry environmental SM information and were further divided in neutrons that originated within the inner area and neutrons that originated in the outer area. Here, it was assumed that the neutrons that originate within the inner irrigated field carry the bulk of the information of interest. Although neutrons that originate outside the irrigated field can have occasional within-field interactions before reaching the CRNS (Köhli et al., 2015), these were considered of secondary importance for the scope of this study. In a following step, the relative changes in detected neutrons with SM variations were investigated. For a given dimension of the inner area, moderator type, and SM of the outer area (10 simulations), the highest simulated neutron count was set to 100%. Then, the results of the other nine simulations were scaled to that count rate. The influence of the moderator type, the dimension of the irrigated area, and the SM in the outer area were then compared. Here, larger changes of detected neutrons were considered beneficial as this leads to higher accuracy of the SM estimates.

Next, the sensitivity to irrigation events was assessed in more detail for the moderator type that provided the largest relative changes in detected neutrons. Starting from homogeneous SM conditions in the simulated domain, an irrigation event was assumed to increase the SM in the irrigated area either by 0.05 or by 0.10 cm<sup>3</sup>cm<sup>-3</sup>. Such SM variation was applied to the entire soil profile. For the 1 ha square area, the SM variation was separately applied to the top 10 cm, 30 cm, and to the entire soil profile. The initial homogeneous SM conditions were between 0.05 and 0.25 cm<sup>3</sup>cm<sup>-3</sup> as this is the relevant range for irrigation applications. The selected detection thresholds, shown in Table 1, were based on the relative error of the simulations:

$$\sigma = 100 * \sqrt{1/N_1 + 1/N_2} \quad (1)$$

where  $N_1$  and  $N_2$  are the neutron counts obtained with the initial and final SM conditions, respectively. In addition to  $\sigma$ , a value of  $\alpha = 1\%$  was included in each threshold to represent a generic detection uncertainty limit for a detector that can achieve ~1000 counts per hour and aggregation times of < 12 hours that are relevant in SM monitoring (Schrön et al., 2022).

**Table 1: Detection thresholds that were adopted to investigate the CRNS sensitivity to irrigation events.**

Threshold value	Sensitivity
Below $\sigma + \alpha$	Uncertain results
$\sigma + \alpha$ to $2\sigma + \alpha$	Good detection chance
$2\sigma + \alpha$ to $3\sigma + \alpha$	High detection chance
Above $3\sigma + \alpha$	Detectable

Lastly, relative changes in detected neutrons due to homogeneous SM variations within the simulation domain were compared with those due to SM variations that occur in the inner or in the outer areas only. Again, the moderator type that had provided the largest relative changes in detected neutrons was selected. For each dimension of the irrigated area (100 simulations), the

highest simulated neutron count was set to 100%. The reduced sensitivity of the detection-SM relationship in the case of SM variations that occur only in the inner area was assessed. Here, a lower reduction in sensitivity was considered beneficial for irrigation monitoring. Also, the influence of the SM in the outer area on the count rate was compared to that of SM variations in the inner area. A strong influence of the SM in the outer area was considered disadvantageous for irrigation monitoring.

### 3 Results and discussion

#### 3.1 CRNS footprint variations with SM heterogeneity and moderator type

The analysis of the CRNS footprint can be useful to understand the general distance from which the measured neutrons originate. The boxplots of R86 for all moderators and for different dimensions of the irrigated field are shown in Figure 3. In general, the footprint increases when a thicker HDPE moderator is used and increases further when gadolinium shielding is added. Additionally, there is a trend towards a larger variability of the footprint size with SM variations when larger irrigated areas are considered. Generally, the largest R86 values are obtained using a 25 mm HDPE moderator with gadolinium shielding (e.g., min =147, med =196, and max =273 m in the 8 ha scenario), whereas the lowest values are obtained with a 5 mm HDPE moderator (e.g., min =127, med =162, and max =238 m in the 0.5 ha scenario). Nonetheless, for each dimension of the irrigated area, the difference in R86 obtained with different moderators and shielding is rather small and in the order of 10 to 20 m only. Such differences in R86 may thus have limited influence on CRNS measurements of small, irrigated fields.


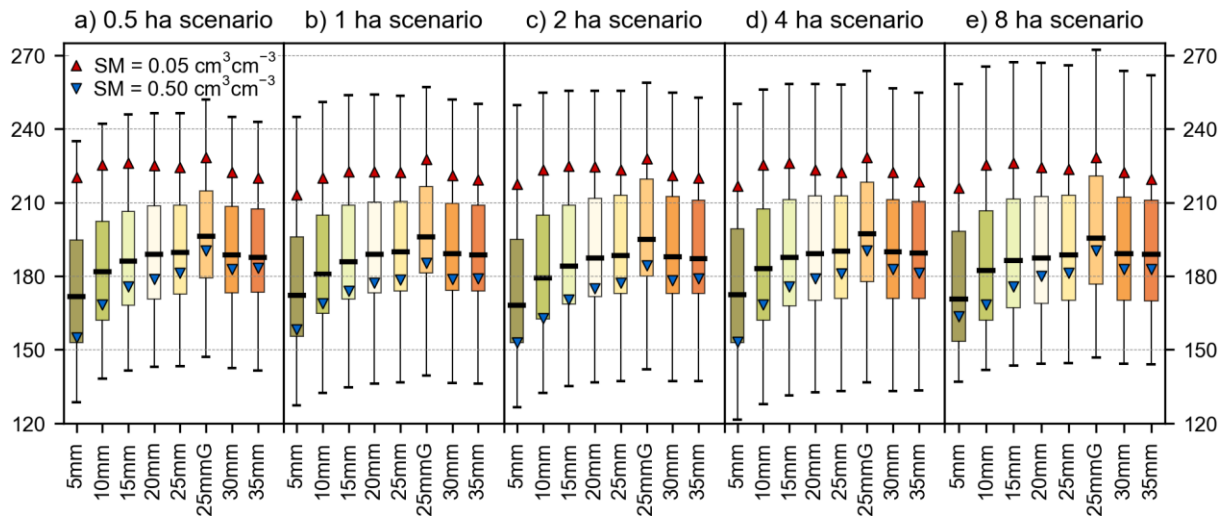


Figure 3: Boxplots of R86 in meters for different moderator types and size of the inner area, i.e. a) 0.5 ha, b) 1 ha, c) 2 ha, d) 4 ha, and e) 8 ha. Each boxplot refers to one moderator type (100 combinations of SM) and shows the minimum and maximum values with whisker caps, the interquartile range with bars, and the median with a black line. Blue and red triangles show R86 values for homogeneous SM of 0.05 and 0.50  $\text{cm}^3 \text{cm}^{-3}$  respectively.

A more in-depth analysis of how R86 changes with SM variation is shown in Figure 4 for a 5 mm HDPE moderator and for a 25 mm HDPE moderator with gadolinium shielding. The value of R86 depends on both the SM of the inner and outer area. Similar patterns in R86 variation with SM are found when other moderators are used (not shown). For example, for a 5 mm HDPE moderator, the highest R86 value in the 0.5 ha scenario is ~234 m for high SM in the inner and low SM in the outer area (bottom right in Figure 4a). The R86 decreases to ~220 m when the SM in the inner area is reduced to  $0.05 \text{ cm}^3 \text{ cm}^{-3}$ . A more pronounced decrease of R86 to ~132 m occurs when the SM in the outer area is increased up to  $0.50 \text{ cm}^3 \text{ cm}^{-3}$ . When the size of the inner area increases (Figure 4b), the general trends in R86 with SM remain rather constant except for simulations where SM is high in the inner area and low in the outer area (bottom right corners). For these conditions, R86 tends to increase with increasing size of the inner area. For example, R86 is ~258 m in the 8 ha scenario (Figure 4b), which is almost 15 m larger than the R86 in the 0.5 ha scenario (~234 m) for a SM of  $0.50 \text{ cm}^3 \text{ cm}^{-3}$  in the inner area and  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  in the outer area. Similar considerations can be drawn for a 25 mm HDPE moderator with gadolinium shielding (Figure 4d-f).

In previous studies, the smallest R86 was often assumed to occur for the highest SM in the CRNS surroundings. This is true for homogeneous SM conditions, but may be different for heterogeneous SM distributions (Schrön et al., 2022). When the SM of the inner area is low and that of the outer area is high, the outer area becomes a less important source of neutrons and thus the footprint is reduced. An opposite effect occurs when the inner SM is high, and the outer SM is low. In this case, the inner area is a smaller source, and the neutrons from the outer area become more important, resulting in a larger footprint. For example, with a 5 mm HDPE moderator (Figure 4a) the R86 of a 0.5 ha field reduces by 39.9 % when SM increases from 0.05 to  $0.50 \text{ cm}^3 \text{ cm}^{-3}$  in the outer area whereas the same SM increase in the inner area enlarges R86 by 6.4 %. For a 25mm HDPE moderator with gadolinium shielding, these percentages are 37.2 % and 9.9 %, respectively.

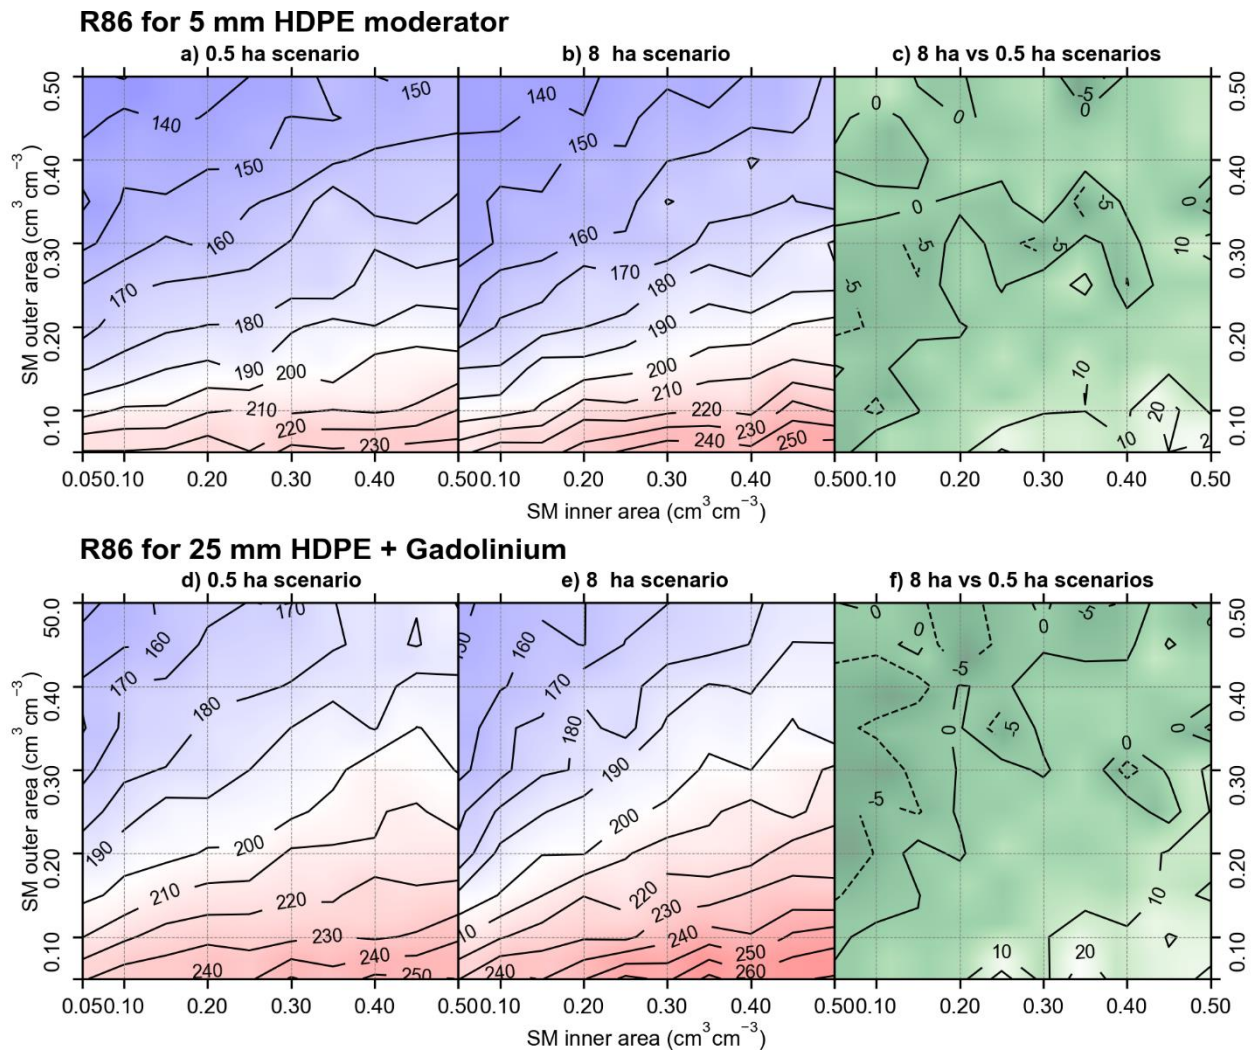

285 **Figure 4: Variation of R86 with SM using a 5 mm HDPE moderator for the a) 0.5 ha and b) 8 ha scenario and using a 25 mm HDPE moderator with gadolinium shielding for d) 0.5 ha and e) 8 ha scenario. The differences between the 8 ha and 0.5 ha scenarios are shown in c) for the 5 mm HDPE moderator and in f) for the 25 mm HDPE moderator with gadolinium shielding. Here, negative values indicate that the footprint of the 8 ha scenario is smaller than that of the 0.5 ha and vice versa.**

### 3.2 Detected albedo neutrons and their origin

For each dimension of the simulated inner area and for each moderator type, Table 2 shows the minimum and maximum percentages of detected (albedo plus non-albedo) neutrons that originate in the inner area depending on SM conditions. This percentage represents the detected neutrons that originate within an irrigated field and thus carry the bulk of the information of interest in case of irrigation applications. Considerable differences are found between simulations depending on the SM in the inner and outer area. The dimension of the irrigated area also influences the results. In particular, 27.7 % to 61.1 % of the detected neutrons originate from within a 0.5 ha irrigated field whereas larger fields show higher percentages (e.g., 50.7 % to

290


85.3 % from within an 8 ha field). In addition, thinner moderators generally show a higher percentage of detected neutrons  
 295 from the inner area.

**Table 2: Minimum and maximum percentage of detected (albedo plus non-albedo) neutrons originating within the inner area depending on SM conditions with different moderators and different scenarios. The colour in each cell indicates the mean percentage with low values in white and high values in grey.**

Moderator	Scenario (inner area dimension)				
	0.5 ha	1 ha	2 ha	4 ha	8 ha
<b>5 mm</b>	34.5 - 61.1	41.0 - 67.9	48.1 - 75.1	57.7 - 81.4	66.4 - 85.3
<b>10 mm</b>	32.0 - 59.9	38.3 - 66.1	44.7 - 72.8	53.9 - 78.9	62.3 - 83.0
<b>15 mm</b>	30.5 - 59.0	36.5 - 64.9	42.4 - 71.2	51.1 - 77.0	59.2 - 81.2
<b>20 mm</b>	29.4 - 58.1	34.9 - 63.6	40.4 - 69.4	48.5 - 75.0	56.1 - 79.2
<b>25 mm</b>	28.8 - 57.6	34.1 - 62.9	39.3 - 68.5	47.0 - 73.9	54.4 - 78.0
<b>25 mm Gad</b>	27.3 - 57.3	32.6 - 62.5	37.5 - 68.1	45.1 - 73.5	52.4 - 77.9
<b>30 mm</b>	28.2 - 57.0	33.3 - 61.9	38.2 - 67.3	45.5 - 72.6	52.4 - 76.6
<b>35 mm</b>	27.7 - 56.4	32.5 - 61.1	37.2 - 66.3	44.1 - 71.3	50.7 - 75.3

300

Figure 5 shows the variation of the percentage of detected albedo neutrons that originate in the inner or in the outer area for the 0.5 ha scenario as a function of the SM of both areas for a detector with 25 mm HDPE moderator and gadolinium shielding, which shows the lowest percentages in Table 2. Non-albedo neutrons are not considered in Figure 5 and the reader is referred to Appendix A for a more detailed description of such detected non-albedo neutrons. Clearly, the fraction of neutrons  
 305 originating in the inner and outer area strongly depends on SM. The percentage of neutrons originating in the inner area is smallest when the inner area is wet and the outer area is dry (31.4%). This percentage increases up to 58.0% if the SM in the inner area is reduced to  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  and then to 69.6% when the SM of the outer area increases to  $0.50 \text{ cm}^3 \text{ cm}^{-3}$ . The percentage of neutrons originating in the outer area shows the opposite trend. From these results, it is clear why CRNS applications focused on irrigation of small fields can face considerable challenges. Especially in small irrigated fields, the  
 310 number of detected neutrons that originate outside the irrigated area can be higher than the number of neutrons that originate inside of the irrigated area. This is especially true when the SM outside the irrigated area is relatively low, which is often the case when the inner area is irrigated. Figure 5b presents the same analysis for an 8 ha field. Here, the percentage of neutrons from the inner area is higher than in the 0.5 ha scenario and shows a lower overall variation. Again, the lowest percentage of detected neutrons originating from the inner area (67.6%) is found when the inner area is wet and the outer area is dry, whereas  
 315 the highest value (90.4%) is found with reversed SM conditions.

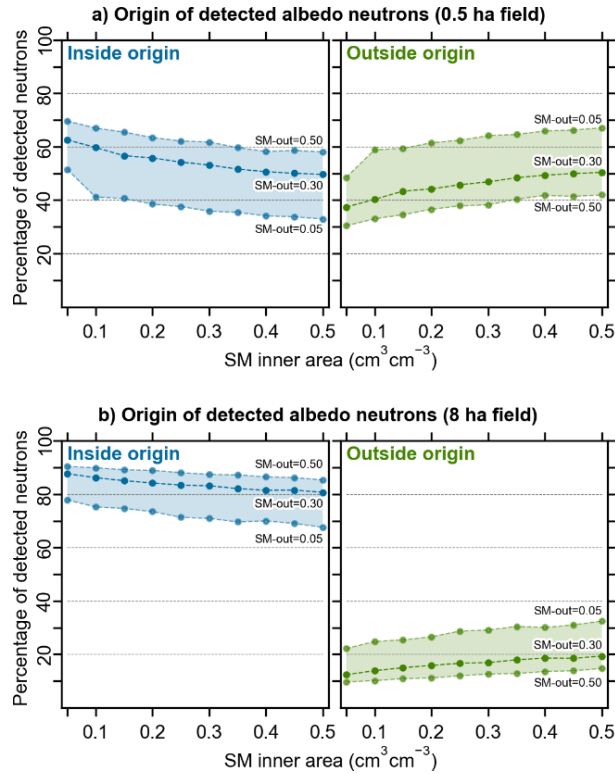

**Figure 5: Percentages of detected neutrons that originate in the inner and outer area for a) the 0.5 ha scenario and b) the 8 ha scenario. These results are shown for a detector with a 25 mm HDPE moderator with gadolinium shielding.**


### 320 3.3 Effect of spatial heterogeneity on the relationship between neutron counts and SM

The relationship between neutron count rate and SM has been mostly investigated for homogeneous SM conditions. Here, we also explore the effect of SM variations that occur only within an inner area that surrounds the instrument (e.g., through irrigation). We considered sizes of the inner irrigated area from 0.5 to 8 ha and two opposite wetness situations for the outer area (i.e., SM of 0.05 and 0.50  $\text{cm}^3 \text{cm}^{-3}$ ). In addition, we considered the effect of the thickness of the moderator and additional

325 shielding on the number of detected neutrons. In Figure 6 and in Figure 7, the neutron counts of the different simulations are scaled to the case with the highest count rates (SM of 0.05  $\text{cm}^3 \text{cm}^{-3}$  everywhere in the simulated domain). Generally, neutron count rates show a non-linear negative relationship with increasing SM in the irrigated area. The detector with a 5 mm HDPE moderator shows the smallest relative changes in neutron counts (Figure 6). Thicker HDPE moderators (i.e., 15, 25, and 35 mm) result in larger relative changes. The largest difference in relative changes is observed between a 5 mm and a 15 mm

330 HDPE moderator whereas the differences between a 25 mm and a 35 mm HDPE moderator are rather small. The highest relative change in number of detected neutrons occurs for a 25 mm HDPE moderator with gadolinium shielding. Nonetheless, the described sensitivities are lower than with a homogeneous SM change in the entire domain (grey circles and squares in Figure 6). The relatively high sensitivity of the 25 mm HDPE moderator with gadolinium shielding seems to contradict the relatively large R86 values as well as the relatively low percentage of detected neutrons that originate within the irrigated area


335 for such moderator. This is attributed to small relative variations of the R86 between different moderators and to the low amount of detected thermal neutrons ( $< 5\%$ ), which only contain limited SM information (see Appendix B). The SM in the outer area also has an influence on the results, although to a lesser degree. For example, a SM of  $0.50 \text{ cm}^3 \text{ cm}^{-3}$  in the outer area (Figure 6b) leads to greater variations in detected neutrons than a SM of  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  in the outer area (Figure 6a).

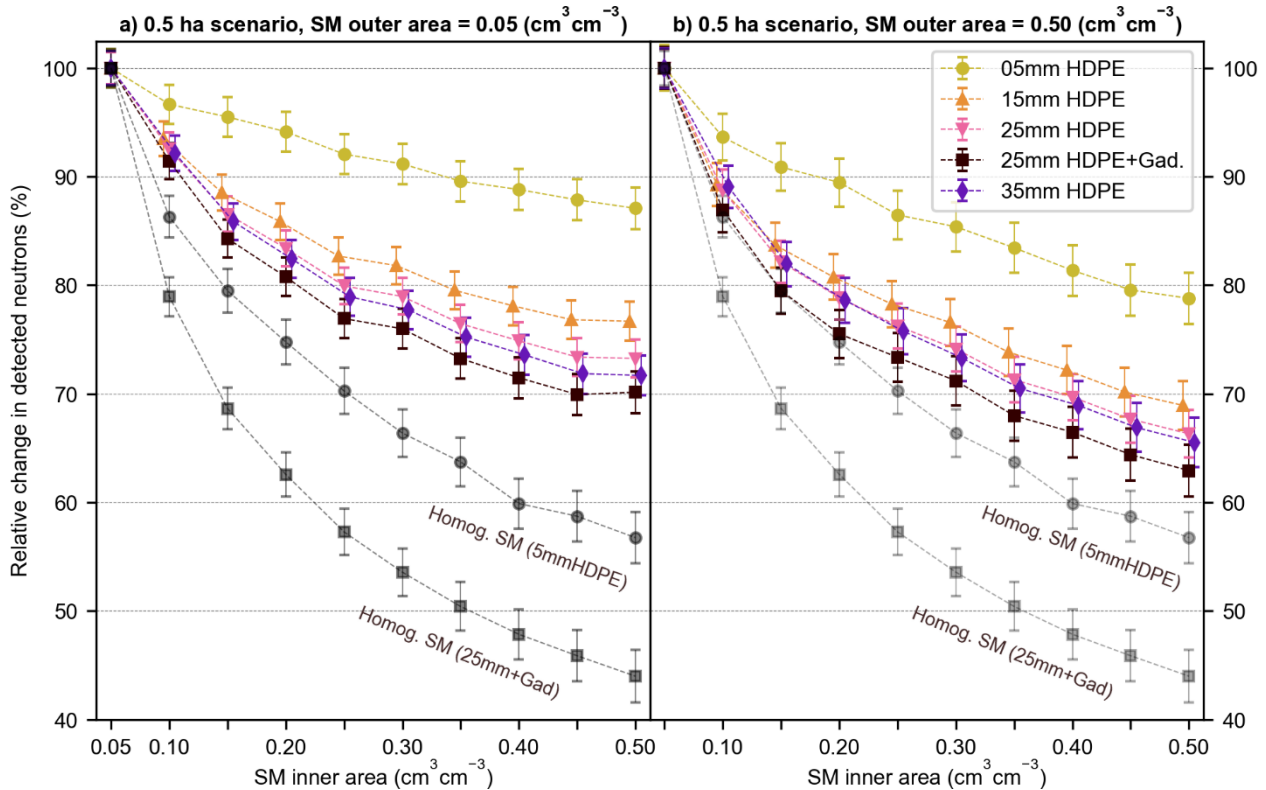

340 **Figure 6: Relative change in number of detected neutrons due to SM variations obtained using different moderators (i.e., 5, 15, 25, 35 mm HDPE and 25 mm HDPE with gadolinium shielding) for a)  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  SM and b)  $0.50 \text{ cm}^3 \text{ cm}^{-3}$  SM in the outer area of a 0.5 ha field. The error bars indicate the relative error of the simulations. Grey circles and squares indicate the relative change for two selected moderators when the SM changes from  $0.05$  to  $0.50 \text{ cm}^3 \text{ cm}^{-3}$  are applied to the entire simulation domain.**

345 The neutron count rates obtained with a 25 mm HDPE moderator with gadolinium shielding for irrigated areas ranging from 0.5 to 8 ha are shown in Figure 7. An increased size of the irrigated area results in larger relative changes in the number of detected neutrons with SM variations, especially when the outer area is dry (Figure 7a). Higher SM of  $0.50 \text{ cm}^3 \text{ cm}^{-3}$  in the outer area (Figure 7b) results in larger relative changes in the number of detected neutrons, although this is mostly the case for relatively small dimensions of the irrigated area. For the 8 ha scenario, the impact of the SM in the outer area is very limited.

350

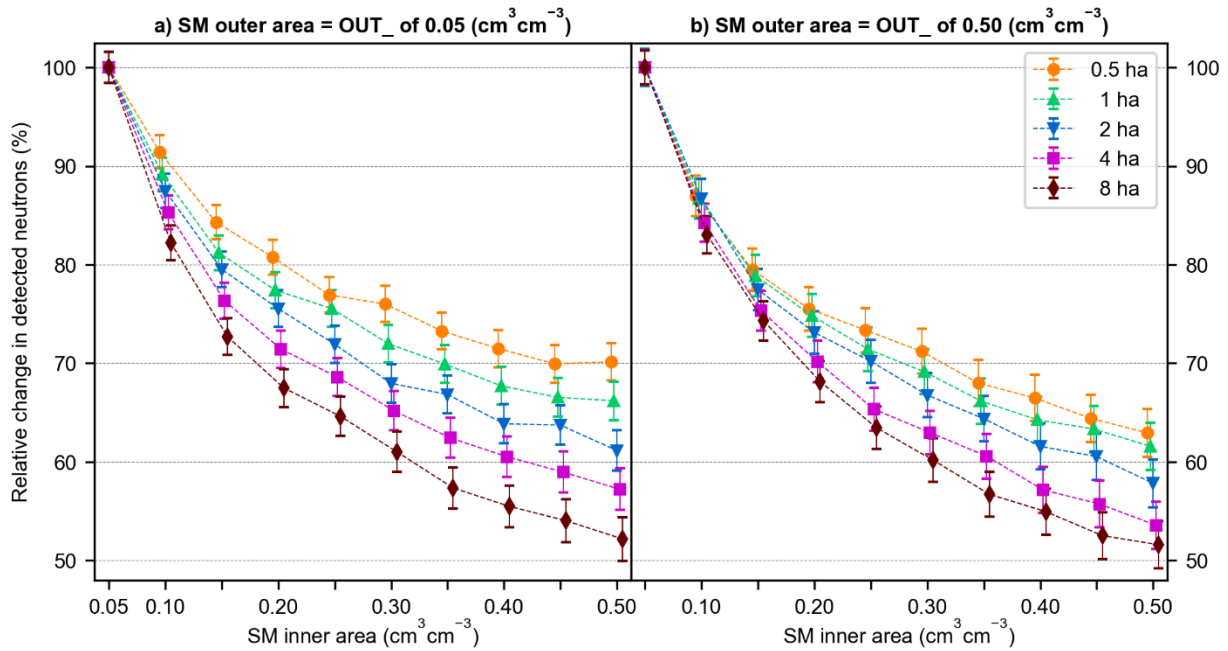


**Figure 7: Relative change in number of detected neutrons using a 25 mm HDPE moderator with gadolinium shielding for different dimensions of the irrigated area and two different SM in the outer area: a)  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  and b)  $0.50 \text{ cm}^3 \text{ cm}^{-3}$ . The error bars indicate the relative error of the simulations.**

355 Generally, larger relative changes in detected neutrons with SM variations lead to an improved performance of a given CRNS  
in a certain environment. Thus, our analysis shows that the CRNS performance in an irrigated environment depends on both  
the moderator type and the SM outside of the irrigated area. However, the effect of different moderator types on the  
performance is stronger. A relatively thin HDPE moderator will generally result in low changes of the neutron count rate with  
SM variations, independent from the dimension of the irrigated field. A thicker HDPE moderator will provide higher neutron  
360 count changes and thus better sensitivity to SM changes in the inner area. Overall, a 25 mm HDPE moderator with gadolinium  
thermal shielding achieves the best results.

### 3.4 CRNS sensitivity to irrigation events

The sensitivity of a CRNS is further analysed to assess if it is possible to detect irrigation events in fields between 0.5 and 8  
ha in size (Figure 8). A 25mm HDPE moderator with gadolinium shielding is used as it provides larger relative changes in the  
365 neutron count rate compared to the other investigated moderators. An irrigation event is assumed to increase the SM of the  
irrigated area by 0.05 or by 0.10  $\text{cm}^3 \text{ cm}^{-3}$  starting from a homogeneous SM condition within the domain. The detection  
thresholds (see Figure 8) are based on the relative error ( $\sigma$ ) of the simulations (Eq. 1), which varied between 2.3 and 3.4 %  
depending on the number of detected neutrons.



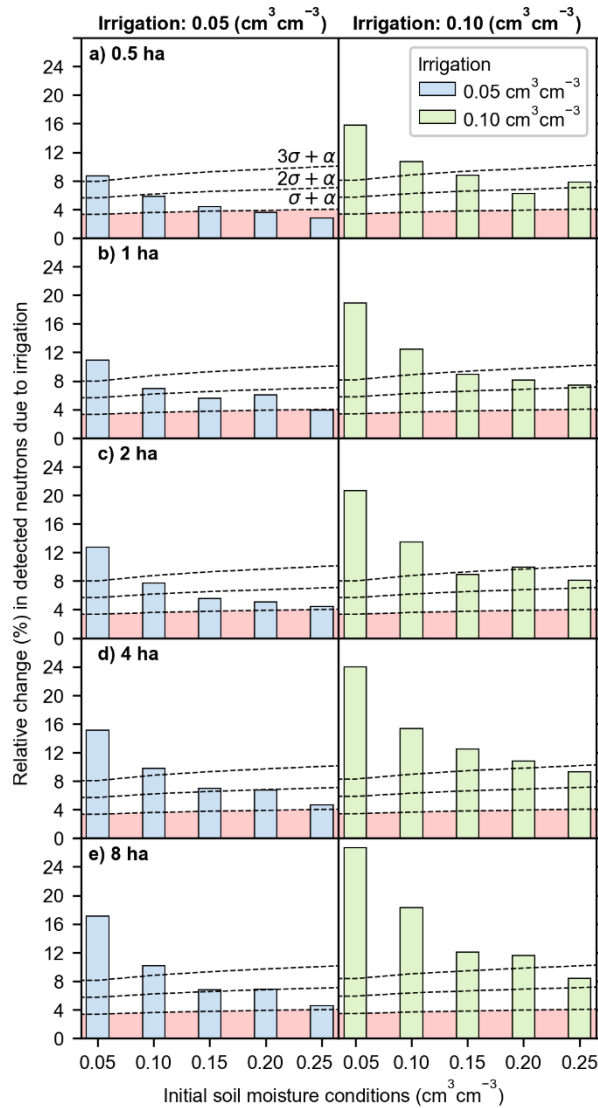

370

**Figure 8: CRNS chance of detecting irrigation events of  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  (blue and green bars respectively) in a) 0.5 ha, b) 1 ha, c) 2 ha, d) 4 ha, and e) 8 ha irrigated fields. The bars show the relative change in detected neutrons induced by the irrigation event while the dashed black lines show the prescribed detection certainty thresholds. The red area below the  $\sigma + \alpha$  threshold indicates uncertain detection.**

375

As shown in Figure 8, an irrigation event that leads to a  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  increase in SM can be detected with CRNS (relative change in detected neutrons higher than  $3\sigma + \alpha$ ) when the initial SM of the simulation domain is  $0.05 \text{ cm}^3 \text{ cm}^{-3}$ . This is the case for all five investigated dimensions of the irrigated area. In the case of 4 ha and 8 ha fields, detection of this type of irrigation event is also achieved with an initial SM of  $0.10 \text{ cm}^3 \text{ cm}^{-3}$ . For initial SM larger than  $0.05 \text{ cm}^3 \text{ cm}^{-3}$ , the chance of detecting irrigation events depends on the dimension of the irrigated area with larger irrigated fields yielding higher detection


380

chances. Overall, the detection of a  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  irrigation event is uncertain (relative change in detected neutrons lower than

$\sigma + \alpha$ ) when the initial SM is  $0.20 \text{ cm}^3 \text{ cm}^{-3}$  or higher in a 0.5 ha field (Figure 8a) or  $0.25 \text{ cm}^3 \text{ cm}^{-3}$  in 1 ha field (Figure 8b). Irrigation events that induce larger SM variations of  $0.10 \text{ cm}^3 \text{ cm}^{-3}$  result in larger relative changes in detected neutrons and thus have a higher chance of detection. Here, the CRNS detects irrigation events with initial SM up to  $0.10 \text{ cm}^3 \text{ cm}^{-3}$  in 0.5, 1, and 2 ha fields, and with initial SM up to  $0.20 \text{ cm}^3 \text{ cm}^{-3}$  in 4 ha and 8 ha fields. If the investigation of a  $0.10 \text{ cm}^3 \text{ cm}^{-3}$  irrigation event is extended to higher initial SM (i.e.,  $0.30$  to  $0.40 \text{ cm}^3 \text{ cm}^{-3}$ ), the only uncertain detection (lower than  $\sigma + \alpha$ ) is that of an initial SM of  $0.40 \text{ cm}^3 \text{ cm}^{-3}$  in a 0.5 ha field (not shown).

### 3.5 Influence of SM in the outer area

In fields between 0.5 ha and 8 ha, a CRNS is not only sensitive to the irrigation of the target field but also to SM variations in the outer area (e.g., due to irrigation of neighbouring fields). It is thus important to assess the impact of SM variations that occur outside the field of interest. Figure 9 shows the relationships between SM variations that occur in the inner area, in the outer area, or in both areas as well as the resulting relative changes in detected neutrons for a 25 mm HDPE moderator with gadolinium shielding. SM variations that are limited to the irrigated field show a reduced sensitivity of the relative change in neutron count rate compared to the case where SM variations occur homogeneously in the entire domain, which is due to the influence of the SM in the outer area. The strongest reduction in the sensitivity of this relationship is found for the 0.5 ha field (Figure 9a). The sensitivity increases with larger dimensions of the irrigated area and the observed reduction is lowest in the case of the 8 ha field (Figure 9e).

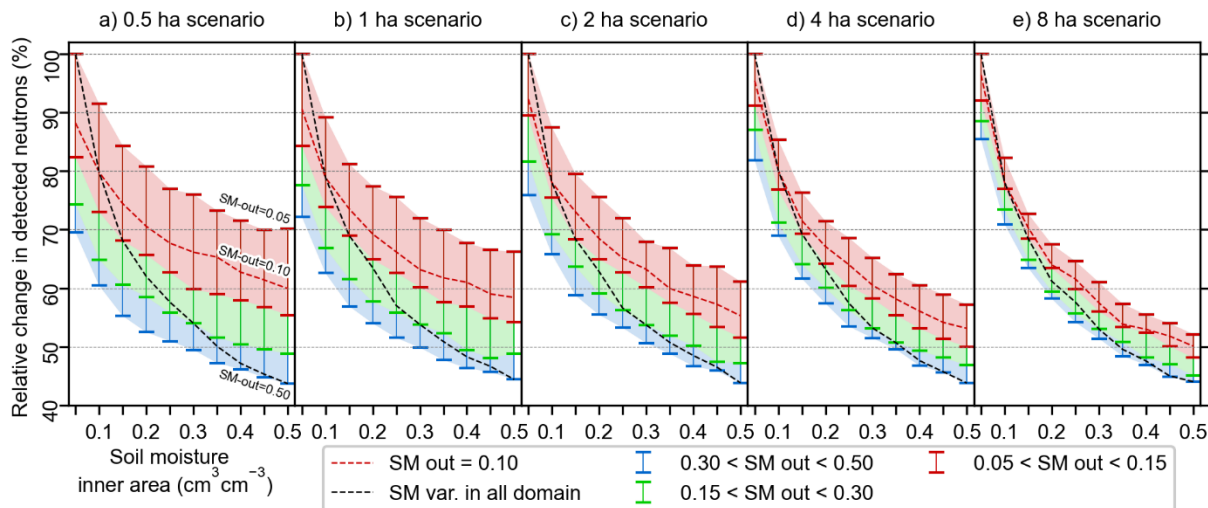

**Figure 9: Relative changes in detected neutrons due to SM variations in a) 0.5 ha, b) 1 ha, c) 2 ha, d) 4 ha, and e) 8 ha irrigated areas. The black dashed line shows SM variations that are homogeneous within the simulated domain. The red dashed lines and the error bars indicate SM variations that occur only within the irrigated area for a different SM in the outer area.**

In the case of a 0.5 ha irrigated field, SM variations in the outer area generally induce a higher relative change in detected neutrons compared to SM variations that occur within the irrigated area. For example, a SM variation from  $0.05$  to  $0.10 \text{ cm}^3 \text{ cm}^{-3}$


405  $\text{cm}^3$  in the outer area (Figure 9a) induces a larger relative change (-11.8%) compared to the same SM variation in the inner area (-8.6%). With larger irrigated areas, the influence of the outer area is reduced. In the 8 ha scenario, a SM variation from 0.05 to 0.10  $\text{cm}^3 \text{cm}^{-3}$  in the inner area induces a larger relative change in detected neutrons than that of a SM variation from 0.05 to 0.50  $\text{cm}^3 \text{cm}^{-3}$  in the outer area. These results suggest that it may be necessary to obtain SM information from the surroundings of a target field in real-world applications of CRNS-based irrigation monitoring.

410 It is also of interest to reduce this analysis to a smaller range of SM in the outer area (i.e., 0.05 to 0.15  $\text{cm}^3 \text{cm}^{-3}$ ) as this is generally the case in irrigated agricultural environments (shaded red area in Figure 9). In the case of 0.5 and 1 ha fields, a SM variation of 0.10  $\text{cm}^3 \text{cm}^{-3}$  in the outer area (red error bars in Figure 9a-b) produces a relative change of the neutron count rate that is higher than that of an irrigation event of 0.05  $\text{cm}^3 \text{cm}^{-3}$ . This is not the case when the initial SM of the domain is 0.05  $\text{cm}^3 \text{cm}^{-3}$  in the 2 ha scenario (Figure 9c), 0.05 to 0.15  $\text{cm}^3 \text{cm}^{-3}$  in the 4 ha scenario (Figure 9d), and 0.05 to 0.20  $\text{cm}^3 \text{cm}^{-3}$  in the 8 ha scenario (Figure 9e). Overall, even if the range of the SM in the outer area is reduced, it can still have a considerable impact on the CRNS. This again underlines the importance of obtaining information on the SM in the outer area, especially in case of relatively small irrigated fields.

#### 4 Limitations and outlook

420 The results of this study suggest that irrigation monitoring with CRNS is feasible for field dimensions and SM conditions that are relevant in irrigation applications. However, it is important to emphasize here that the presented results constitute a best-case scenario as it assumes a square shape of the irrigated area, homogeneous SM changes (both horizontally and vertically) in the inner irrigated area, as well as stable SM conditions in the surroundings. An additional complexity could be represented by the influence of vegetation or air humidity. For example, air humidity affects R86 (Köhli et al., 2015) and may thus modify the contribution to detected neutrons of the irrigated field. Moreover, heterogeneous vertical SM distributions or different dimensions of the irrigated field, such as irregular or elongated shapes, might be more challenging for irrigation monitoring with CRNS. Figure 10 shows the sensitivity of a CRNS with a 25 mm HDPE moderator and gadolinium shielding to irrigation events that increase the SM of the irrigated area by 0.05 or by 0.10  $\text{cm}^3 \text{cm}^{-3}$  starting from a homogeneous SM condition for different shapes of the irrigated area. The comparison between a circular (56 m radius), rectangular (142x70 m), and a square field of 1 ha (Figure 10a-c) shows that there is a small change in CRNS performance for given SM variations for different field geometries. However, the differences are small and the overall feasibility of irrigation monitoring with CRNS is not affected. Figure 10 also shows the sensitivity to irrigation events when only the first 10 cm or 30 cm of soil are wetted in a 1 ha square field. When irrigation affects SM only in the first 10 cm of soil (Figure 10d), the sensitivity of the CRNS is strongly reduced. This is especially the case for SM variations of 0.05  $\text{cm}^3 \text{cm}^{-3}$  where the CRNS is able to detect irrigation only when the initial SM is 0.05  $\text{cm}^3 \text{cm}^{-3}$ . However, it should be noted that SM variations of 0.05 and 0.10  $\text{cm}^3 \text{cm}^{-3}$  correspond to irrigation events of 5 and 10 mm. This rather small irrigation amount might correspond to the initial SM variation during a larger irrigation event or to frequent events (e.g., daily irrigation). When irrigation affects SM in the first 30 cm of soil, the sensitivity of a

CRNS is comparable to that of a homogeneous vertical distribution of SM (Figure 10a and e). The only differences are a drop from high to good detection chances for a  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  SM variation and from certain to high detection chances for a  $0.10 \text{ cm}^3 \text{ cm}^{-3}$  SM variation when the initial SM is  $0.15 \text{ cm}^3 \text{ cm}^{-3}$ . Overall, Figure 10 suggests that a small change in the field shape and irrigation affecting just the top 30 cm of soil will only have a small influence on the feasibility of irrigation monitoring with CRNS. However, it has to be noted that these results are based only on a limited number of simulations and real-world studies should assess in more detail the influence of the shape of the irrigated field in addition to the impact of the within-field SM heterogeneity.

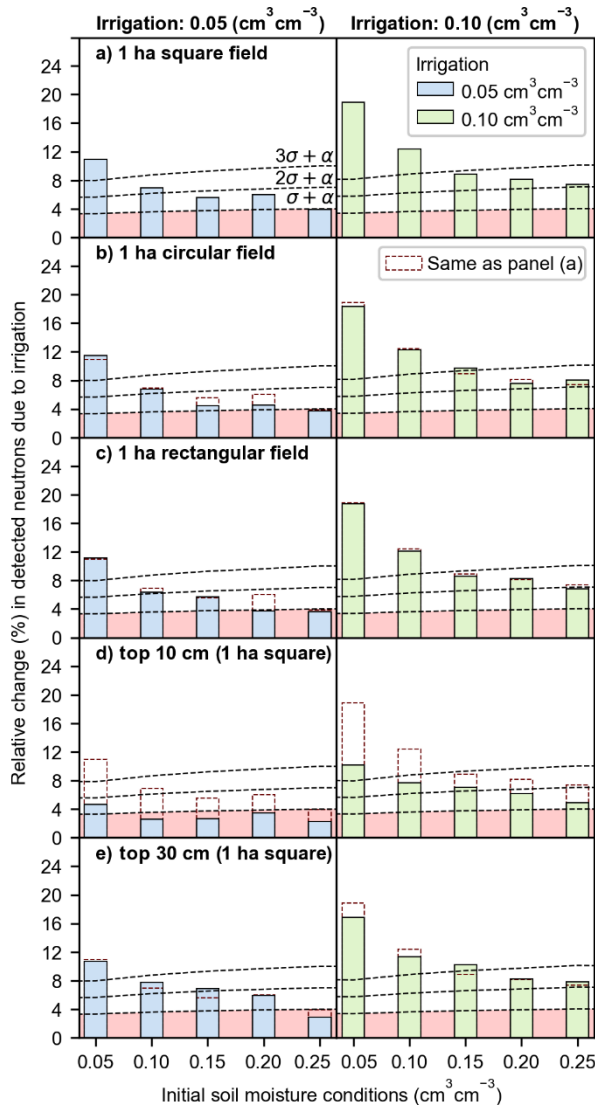

445

Figure 10: CRNS chance of detecting irrigation events of  $0.05$  and  $0.10 \text{ cm}^3 \text{ cm}^{-3}$  (blue and green bars respectively) in a) 1 ha squared field, b) 1 ha circular field, c) 1 ha rectangular field, and for SM variations that affect only the top d) 10 cm and e) 30 cm

of soil for a 1 ha squared field. The bars show the relative change in detected neutrons induced by the irrigation event while the dashed black lines show the prescribed detection certainty thresholds. In panels b-e, the dashed red bars indicate the results of panel a (1 ha squared field). The red area below the  $\sigma + \alpha$  threshold indicates uncertain detection

450

Another aspect that needs further investigation is the role of SM variations in the surroundings of a target irrigated field. Information on such SM variations may be necessary to correct CRNS-based SM products not only in relatively small fields (up to 2 ha) but also in larger ones. When a CRNS is installed in an irrigated field in place of a sensor network, the CRNS could be supported by a single and inexpensive point-scale SM monitoring instrument installed outside the target field. This would not substantially increase the installation and maintenance costs and would not interfere with agricultural management. Moreover, a single point-scale device could support multiple CRNS in an agricultural area if irrigated fields are sufficiently distanced and if the SM in the unmanaged area is relatively homogeneous in space. However, in small fields (e.g., < 0.5 ha) that have relatively homogeneous SM, a small sensor network could be more effective than a CRNS. Within this context, Monte Carlo simulations of neutron transport represent an added value as they inform on the relative contribution from the surroundings of an irrigated field to the neutron count. Future research should investigate if generalized neutron transport simulations are sufficiently accurate or if simulations should be tailored to a target irrigated area. As a result, Monte Carlo simulation results could be employed before installation to provide farmers with an estimate of the costs and benefits of a CRNS-based irrigation monitoring system.

## 465 **5 Conclusions**

This study explores the feasibility of irrigation monitoring with CRNS by using Monte Carlo neutron transport simulations. Specifically, it investigates the influence of the moderator type, the dimensions of the irrigated area, and of SM variations within and outside the irrigated area. Results show that the CRNS footprint (R86) depends both on the SM in the irrigated area and its surroundings as well as, to a lesser degree, on the moderator type and on the dimension of the irrigated area. Generally, detectors with thinner HDPE moderators result in smaller footprints although differences between the investigated moderators are relatively small. Regarding the origin of detected neutrons, a considerable fraction of the detected neutrons can originate from outside the irrigated region, which may represent a challenge in CRNS-based irrigation monitoring. This fraction varies considerably with the size of the irrigated area. Relatively higher contributions from the irrigated field are obtained for larger sizes of the irrigated area (e.g., 28% to 61% in 0.5 ha and 51% to 85% in 8 ha), higher SM outside the irrigated area, and, to a lesser degree, by detectors with thin HDPE moderators. Despite a relatively larger R86 combined with lower contributions from the irrigated field, thicker HDPE moderators and the addition of a thermal shielding result in higher relative changes in detected neutrons with respect to SM variations. Thus, such moderator types are expected to bring improvements in CRNS-based irrigation monitoring.

475

480 A CRNS with a 25 mm HDPE moderator and gadolinium shielding can detect irrigation events that increase SM by  $0.05 \text{ cm}^3$   
 $\text{cm}^{-3}$  even in fields as small as 0.5 ha when the SM in the entire simulated domain is  $0.05 \text{ cm}^3 \text{ cm}^{-3}$ . Detection is uncertain in a  
0.5 ha field when initial SM is  $0.20 \text{ cm}^3 \text{ cm}^{-3}$  or higher and again uncertain in 1 ha field when initial SM is  $0.25 \text{ cm}^3 \text{ cm}^{-3}$  or  
485 above. Higher detection chances are found in the case of irrigation events that increased SM by  $0.10 \text{ cm}^3 \text{ cm}^{-3}$ . For a 1 ha  
irrigated area, the use of a circular or rectangular shape instead of a square shape and SM increases in the first 30 cm of soil  
instead of the entire soil profile did not results in considerable changes in the CRNS sensitivity. On the contrary, when SM  
was increased only in the first 10 cm of soil (e.g., small daily events or the initial stage of larger irrigation event), a considerable  
reduction in sensitivity was observed. Generally, larger irrigated fields, lower initial SM, and higher SM variations due to  
irrigation provide higher chances of detection. Using the same moderator, the relationship between relative changes in detected  
neutrons and SM variations for irrigated fields shows a reduced sensitivity compared to the case of homogeneous SM variations  
490 within the entire simulated domain. Such sensitivity reduction is due to the influence of SM from the outer area and is stronger  
in small irrigated fields compared to large ones. If SM in the outer area of 0.5 and 1 ha fields is between  $0.05$  and  $0.15 \text{ cm}^3 \text{ cm}^{-3}$ ,  
 $^3$ , it is generally not possible to distinguish whether a relative change in detected neutrons is due to irrigation or to SM variations  
in the surroundings. On the contrary, in an 8 ha field, irrigation-related SM variations of  $0.05 \text{ cm}^3 \text{ cm}^{-3}$  can be identified up to  
a maximum SM of  $0.20 \text{ cm}^3 \text{ cm}^{-3}$ , independently from the SM of the surrounding area. The results suggest the importance of  
495 obtaining information on the SM of the outer area in real-world applications of CRNS-based irrigation monitoring.

Overall, this study shows that CRNS can be successfully employed in irrigation monitoring for both field dimensions and SM  
conditions that are relevant in irrigation applications. Real-world conditions may nevertheless prove challenging due to the  
presence of additional factors and limitations that were not considered in this study. For example, vertical and horizontal  
500 heterogeneous SM variations within the irrigated field should be investigated in more detail in future studies as well as different  
shapes of the irrigated field. Moreover, the use of SM information from the surroundings of an actual irrigated field with  
limited size could be considered to correct CRNS-based irrigation products by combining actual measurements with Monte  
Carlo simulations. Prior to installation, Monte Carlo simulations could also be employed to assess the costs and benefits of a  
given detector in a specific irrigated environment. In the long term, the combination of simulations and real-world installations  
505 should be considered to establish CRNS as a decision support system for irrigation management and thus provide an additional  
tool to improve water use efficiency in agriculture.

## Appendix A

In all the 500 simulations, the percentage of non-albedo detected neutrons varied with SM variations and with the type of  
moderator (Table A 1). Non-albedo neutrons represented a considerable percentage of the total detected neutrons. No  
510 meaningful variations were obtained with different dimensions of the irrigated area. Thick moderators resulted in higher

percentages of detected non-albedo neutrons compared to thin moderators (e.g., 5.5 to 9.9 % with a 5 mm HDPE moderator and 15.2 to 31.8 % with a 35 mm HDPE moderator).


**Table A 1: Minimum and maximum percentage of non-albedo neutrons detected with different moderators and different scenarios. The colour in each cell indicates the mean percentage with low values in white and high values in grey.**

Moderator	Scenario (inner area dimension)				
	0.5 ha	1 ha	2 ha	4 ha	8 ha
<b>5 mm</b>	5.5 - 9.9	5.5 - 10.1	5.5 - 9.8	5.6 - 9.7	5.8 - 9.9
<b>10 mm</b>	7.4 - 14.5	7.4 - 14.7	7.3 - 14.5	7.5 - 14.4	7.8 - 14.6
<b>15 mm</b>	9.1 - 18.5	9.1 - 18.6	8.9 - 18.7	9.2 - 18.5	9.4 - 18.7
<b>20 mm</b>	11.1 - 23	11.1 - 22.9	10.9 - 23.3	11.2 - 23.0	11.3 - 23.2
<b>25 mm</b>	12.2 - 25.6	12.2 - 25.5	12.1 - 25.8	12.4 - 25.5	12.4 - 25.8
<b>25 mm + Gad.</b>	12.1 - 27.2	12.1 - 27.1	11.9 - 27.5	12.3 - 27.2	12.3 - 27.3
<b>30 mm</b>	13.7 - 28.7	13.7 - 28.6	13.6 - 29.0	13.9 - 28.5	13.9 - 29.0
<b>35 mm</b>	15.2 - 31.5	15.2 - 31.3	15.0 - 31.8	15.4 - 31.3	15.3 - 31.8

## 515 Appendix B

Thermal neutrons were found to have a smaller footprint compared to epithermal neutrons (Jakobi et al., 2021). The number of detected thermal neutrons and their percentage among all detected neutrons changes abruptly when different moderators are used (Figure B 1). A moderator of 5 mm HDPE results in thermal neutrons being above the 50% level of detected neutrons. Such percentage can be reduced by increasing the thickness of the HDPE moderator and by adding a gadolinium shielding.

520 Moderators that detect more thermal neutrons will result in smaller footprint compared to other detectors (see Figure 3 and Figure 4) and, likely, in more detected neutrons originating within an irrigated field (see Table 2).

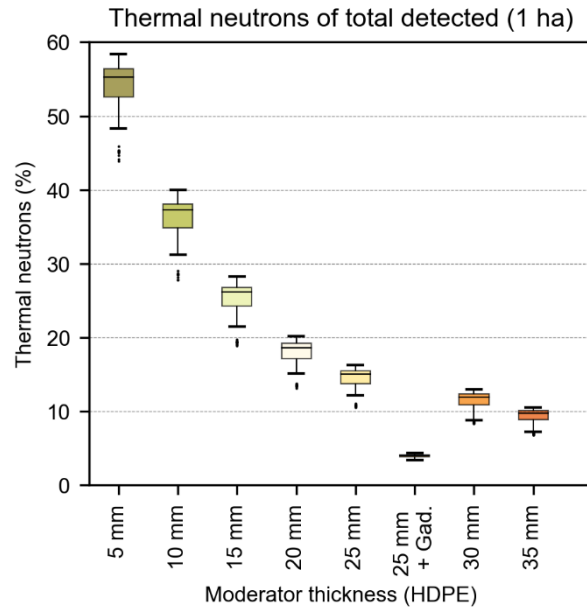

525 **Figure B 1: Boxplot of the percentage of detected thermal neutrons over the total number of neutrons that are detected with different moderator types for the 1 ha scenario (each boxplot shows the results of 100 simulations).**

Table B 1 shows that the variation in detected thermal neutrons that originate within a 1 ha irrigated field is rather small with a 5 mm HDPE moderator (although it should be noted that the relative errors are not negligible as detected thermal neutrons range between ~700 and ~800). Consequently, thermal neutrons can concentrate the instrument footprint over a small area (e.g., an irrigated field) but this might not be followed by an added value in the detection of SM changes within such area.

530


**Table B 1: Thermal neutrons with origin in IN\_1ha detected with a 5mm HDPE moderator and expressed as a fraction of the maximum value (i.e., 840 thermal neutrons detected with SM of 10 cm<sup>3</sup> cm<sup>-3</sup> in IN\_0.5ha and 0.05 cm<sup>3</sup> cm<sup>-3</sup> in OUT\_0.5ha).**

		SM (cm <sup>3</sup> cm <sup>-3</sup> ) in the 1 ha field									
		0.05	0.10	0.15	0.20	0.25	0.30	0.30	0.40	0.45	0.50
SM in outer area	0.50	0.92	0.95	0.98	0.90	0.92	0.91	0.89	0.81	0.85	0.84
	0.45	0.94	0.96	0.96	0.95	0.97	0.91	0.89	0.86	0.84	0.79
	0.40	0.91	0.96	0.99	0.96	0.94	0.92	0.88	0.86	0.82	0.84
	0.35	0.94	0.93	0.98	0.98	0.94	0.93	0.86	0.85	0.86	0.83
	0.30	0.92	0.95	0.98	0.95	0.97	0.92	0.87	0.86	0.81	0.82
	0.25	0.91	0.98	0.96	0.97	0.97	0.89	0.91	0.87	0.82	0.82
	0.20	0.91	0.95	0.95	0.94	0.95	0.90	0.88	0.87	0.83	0.83
	0.15	0.90	0.96	0.99	0.97	0.96	0.94	0.92	0.89	0.83	0.81
	0.10	0.94	0.95	0.97	0.95	0.94	0.89	0.89	0.84	0.83	0.81
	0.05	0.95	1.00	0.98	0.96	0.92	0.92	0.88	0.84	0.85	0.82



## Appendix C

Figure C 1, shows the relationship between SM variations (that occur in the inner area, in the outer area, or in both) and the consequent relative change in detected neutrons as well as the influence of the SM outside the irrigated field. This is shown for a 5 mm HDPE (Figure C 1a-e) and a 25 mm HDPE moderators (Figure C 1f-j). Compared to a 25 mm HDPE moderator with gadolinium shielding (Figure 9), the 25 mm HDPE and 5 mm HDPE moderators show a generally lower sensitivity and higher influence of the SM outside the irrigated field, especially for the 5 mm HDPE moderator version.

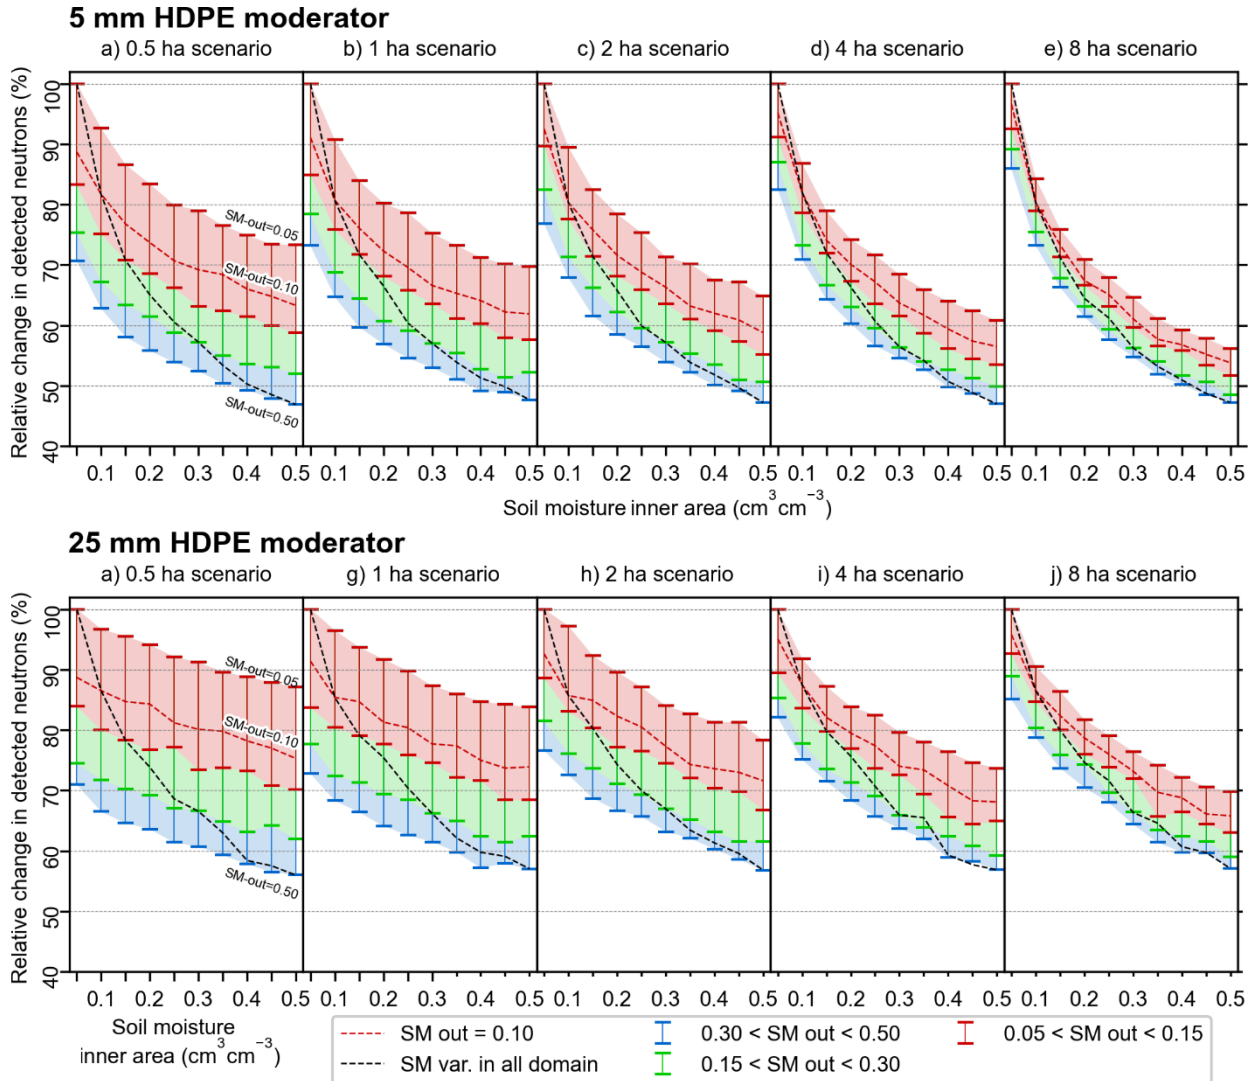

540

**Figure C 1:** Relative changes in detected neutrons due to SM variations in a) 0.5 ha, b) 1 ha, c) 2 ha, d) 4 ha, and e) 8 ha irrigated areas for a 5 mm HDPE moderator and in f) 0.5 ha, g) 1 ha, h) 2 ha, i) 4 ha, and l) 8 ha for a 25 mm HDPE moderator. The black dashed line shows SM variations that are homogeneous within the simulated domain. The red dashed lines and the error bars indicate SM variations that occur only within the irrigated area for a different SM in the outer area.

## 545 **Data availability**

Data are available upon contacting the authors. The URANOS model can be downloaded at the following address: <http://www.ufz.de/uranos> (last access: 29.06.2022).

## **Author contributions**

Conceptualization CB HRB MK, methodology CB HRB MK, investigation CB MK, methodology finalization CB HRB MK  
550 JAH HJHF OD, writing - original draft preparation CB, writing - review and editing CB HRB MK JAH HJHF OD. All authors have read and agreed to the published version of the manuscript.

## **Competing interests**

M. Köhli holds a CEO position at StyX Neutronica GmbH.

## **Acknowledgements**

555 This research received the support from the ATLAS project funded through the EU's Horizon 2020 research and innovation program under grant agreement No. 857125 and from the DFG 425 (German Research Foundation) via the project 357874777, research unit FOR 2694 Cosmic Sense.

## **References**

- 560 Abioye, E. A., Abidin, M. S. Z., Mahmud, M. S. A., Buyamin, S., Ishak, M. H. I., Abd Rahman, M. K. I., Otuoze, A. O., Onotu, P., and Ramli, M. S. A.: A review on monitoring and advanced control strategies for precision irrigation, *Computers and Electronics in Agriculture*, 173, 105441, 2020.
- Adeyemi, O., Grove, I., Peets, S., and Norton, T.: Advanced monitoring and management systems for improving sustainability in precision irrigation, *Sustainability*, 9, 353, 2017.
- 565 Andreasen, M., Jensen, K. H., Zreda, M., Desilets, D., Bogena, H., and Looms, M. C.: Modeling cosmic ray neutron field measurements, *Water Resources Research*, 52, 6451-6471, 2016.
- Baatz, R., Bogena, H., Hendricks Franssen, H. J., Huisman, J., Montzka, C., and Vereecken, H.: An empirical vegetation correction for soil water content quantification using cosmic ray probes, *Water Resources Research*, 51, 2030-2046, 2015.
- Baatz, R., Franssen, H.-J. H., Han, X., Hoar, T., Bogena, H., and Vereecken, H.: Evaluating the value of a network of cosmic-ray probes for improving land surface modeling, *Hydrol. Earth Syst. Sci*, 21, 2509-2530, 2017.
- 570 Badiee, A., Wallbank, J. R., Fentanes, J. P., Trill, E., Scarlet, P., Zhu, Y., Cielniak, G., Cooper, H., Blake, J. R., and Evans, J. G.: Using additional moderator to control the footprint of a COSMOS Rover for soil moisture measurement, *Water Resources Research*, 57, e2020WR028478, 2021.
- Baroni, G., Scheffele, L., Schrön, M., Ingwersen, J., and Oswald, S.: Uncertainty, sensitivity and improvements in soil moisture estimation with cosmic-ray neutron sensing, *Journal of Hydrology*, 564, 873-887, 2018.
- 575 Bogena, H., Herbst, M., Huisman, J., Rosenbaum, U., Weuthen, A., and Vereecken, H.: Potential of wireless sensor networks for measuring soil water content variability, *Vadose Zone Journal*, 9, 1002-1013, 2010.
- Bogena, H., Huisman, J., Baatz, R., Hendricks Franssen, H. J., and Vereecken, H.: Accuracy of the cosmic-ray soil water content probe in humid forest ecosystems: The worst case scenario, *Water Resources Research*, 49, 5778-5791, 2013.

- 580 Bogena, H., Huisman, J., Güntner, A., Hübner, C., Kusche, J., Jonard, F., Vey, S., and Vereecken, H.: Emerging methods for noninvasive sensing of soil moisture dynamics from field to catchment scale: A review, *Wiley Interdisciplinary Reviews: Water*, 2, 635-647, 2015.
- Bogena, H., Herrmann, F., Jakobi, J., Brogi, C., Ilias, A., Huisman, J., Panagopoulos, A., and Pinaras, V.: Monitoring of snowpack dynamics with cosmic-ray neutron probes: A comparison of four conversion methods, *Frontiers in water*, 2, 19, 2020.
- 585 Bogena, H., Schrön, M., Jakobi, J., Ney, P., Zacharias, S., Andreasen, M., Baatz, R., Boorman, D., Duygu, B., and Eguibar-Galán, M.: COSMOS-Europe: A European Network of Cosmic-Ray Neutron Soil Moisture Sensors, *Earth System Science Data Discussions*, 1-33, 2022.
- Chadwick, M. B., Herman, M., Obložinský, P., Dunn, M. E., Danon, Y., Kahler, A., Smith, D. L., Pritychenko, B., Arbanas, G., and Arcilla, R.: ENDF/B-VII. 1 nuclear data for science and technology: cross sections, covariances, fission product yields and decay data, *Nuclear data sheets*, 112, 2887-2996, 2011.
- 590 Chrisman, B. and Zreda, M.: Quantifying mesoscale soil moisture with the cosmic-ray rover, *Hydrology and Earth System Sciences*, 17, 5097-5108, 2013.
- Desilets, D., Zreda, M., and Ferré, T. P.: Nature's neutron probe: Land surface hydrology at an elusive scale with cosmic rays, *Water Resources Research*, 46, 2010.
- Desilets, D. and Zreda, M.: Footprint diameter for a cosmic-ray soil moisture probe: Theory and Monte Carlo simulations, *Water Resources Research*, 49, 3566-3575, 2013.
- 595 Dong, J., Ochsner, T. E., Zreda, M., Cosh, M. H., and Zou, C. B.: Calibration and validation of the COSMOS rover for surface soil moisture measurement, *Vadose Zone Journal*, 13, 2014.
- Elliott, J., Deryng, D., Müller, C., Frieler, K., Konzmann, M., Gerten, D., Glotter, M., Flörke, M., Wada, Y., Best, N., Eisner, S., Fekete, B. M., Folberth, C., Foster, I., Gosling, S. N., Haddeland, I., Khabarov, N., Ludwig, F., Masaki, Y., Olin, S., Rosenzweig, C., Ruane, A. C., Satoh, Y., Schmid, E., Stacke, T., Tang, Q., and Wisser, D.: Constraints and potentials of future irrigation water availability on agricultural production under climate change, *Proceedings of the National Academy of Sciences*, 111, 3239-3244, doi:10.1073/pnas.1222474110, 2014.
- 600 Finkenbinder, C. E., Franz, T. E., Gibson, J., Heeren, D. M., and Luck, J.: Integration of hydrogeophysical datasets and empirical orthogonal functions for improved irrigation water management, *Precision agriculture*, 20, 78-100, 2019.
- Francke, T., Heistermann, M., Köhli, M., Budach, C., Schrön, M., and Oswald, S. E.: Assessing the feasibility of a directional cosmic-ray neutron sensing sensor for estimating soil moisture, *Geoscientific Instrumentation, Methods and Data Systems*, 11, 75-92, 2022.
- 605 Franz, T. E., Zreda, M., Ferre, T., and Rosolem, R.: An assessment of the effect of horizontal soil moisture heterogeneity on the area-average measurement of cosmic-ray neutrons, *Water Resources Research*, 49, 6450-6458, 2013.
- Franz, T. E., Wahbi, A., Vreugdenhil, M., Weltin, G., Heng, L., Oismueller, M., Strauss, P., Dercon, G., and Desilets, D.: Using cosmic-ray neutron probes to monitor landscape scale soil water content in mixed land use agricultural systems, *Applied and Environmental Soil Science*, 2016, 2016.
- 610 Franz, T. E., Wahbi, A., Zhang, J., Vreugdenhil, M., Heng, L., Dercon, G., Strauss, P., Brocca, L., and Wagner, W.: Practical data products from cosmic-ray neutron sensing for hydrological applications, *Frontiers in Water*, 2, 9, 2020.
- Heistermann, M., Francke, T., Schrön, M., and Oswald, S. E.: Spatio-temporal soil moisture retrieval at the catchment scale using a dense network of cosmic-ray neutron sensors, *Hydrology and Earth System Sciences*, 25, 4807-4824, 2021.
- Iwema, J., Schrön, M., Koltermann Da Silva, J., Schweiser De Paiva Lopes, R., and Rosolem, R.: Accuracy and precision of the cosmic-ray neutron sensor for soil moisture estimation at humid environments, *Hydrological Processes*, 35, e14419, 2021.
- 615 Jakobi, J., Huisman, J. H., Schrön, M., Fiedler, J., Brogi, C., Vereecken, H., and Bogena, H. R.: Error estimation for soil moisture measurements with cosmic-ray neutron sensing and implications for rover surveys, *Frontiers in Water*, 10.3389/frwa.2020.00010, 2020.
- Jakobi, J., Huisman, J. A., Köhli, M., Rasche, D., Vereecken, H., and Bogena, H.: The footprint characteristics of cosmic ray thermal neutrons, *Geophysical Research Letters*, 48, e2021GL094281, 2021.
- 620 Jakobi, J. C., Huisman, J. A., Fuchs, H., Vereecken, H., and Bogena, H.: Potential of thermal neutrons to correct cosmic-ray neutron soil moisture content measurements for dynamic biomass effects, 2022.
- Kamali, B., Lorite, I. J., Webber, H. A., Rezaei, E. E., Gabaldon-Leal, C., Nendel, C., Siebert, S., Ramirez-Cuesta, J. M., Ewert, F., and Ojeda, J. J.: Uncertainty in climate change impact studies for irrigated maize cropping systems in southern Spain, *Scientific reports*, 12, 1-13, 2022.
- 625 Köhli, M., Schrön, M., Zreda, M., Schmidt, U., Dietrich, P., and Zacharias, S.: Footprint characteristics revised for field-scale soil moisture monitoring with cosmic-ray neutrons, *Water Resources Research*, 51, 5772-5790, 2015.
- Köhli, M., Schrön, M., and Schmidt, U.: Response functions for detectors in cosmic ray neutron sensing, *Nuclear instruments and methods in physics research section A: Accelerators, spectrometers, detectors and associated equipment*, 902, 184-189, 2018.
- Köhli, M., Weimar, J., Schrön, M., Baatz, R., and Schmidt, U.: Soil moisture and air humidity dependence of the above-ground cosmic-ray neutron intensity, *Frontiers in Water*, 2, 66, 2021.
- 630 Kukal, M. S. and Irmak, S.: Irrigation-limited yield gaps: trends and variability in the United States post-1950, *Environmental Research Communications*, 1, 061005, 2019.
- Li, D., Schrön, M., Köhli, M., Bogena, H., Weimar, J., Jiménez Bello, M. A., Han, X., Martínez-Gimeno, M. A., Zacharias, S., Vereecken, H., and Hendricks Franssen, H. J.: Can drip irrigation be scheduled with cosmic-ray neutron sensing?, *Vadose zone journal*, 18, 1-13, 2019.

- 635 Mohanty, B. P., Cosh, M. H., Lakshmi, V., and Montzka, C.: Soil moisture remote sensing: State-of-the-science, *Vadose Zone Journal*, 16, 1-9, 2017.
- Molden, D.: *Water for food water for life: A comprehensive assessment of water management in agriculture*, Routledge 2013.
- Montzka, C., Bogena, H. R., Zreda, M., Monerris, A., Morrison, R., Muddu, S., and Vereecken, H.: Validation of spaceborne and modelled surface soil moisture products with cosmic-ray neutron probes, *Remote sensing*, 9, 103, 2017.
- 640 Ney, P., Köhli, M., Bogena, H., and Goergen, K.: CRNS-based monitoring technologies for a weather and climate-resilient agriculture: realization by the ADAPTER project, 2021 IEEE International Workshop on Metrology for Agriculture and Forestry (MetroAgriFor), 203-208,
- Pisinaras, V., Paraskevas, C., and Panagopoulos, A.: Investigating the Effects of Agricultural Water Management in a Mediterranean Coastal Aquifer under Current and Projected Climate Conditions, *Water*, 13, 108, 2021.
- 645 Ragab, R., Evans, J., Battilani, A., and Solimando, D.: The cosmic-ray soil moisture observation system (Cosmos) for estimating the crop water requirement: new approach, *Irrigation and drainage*, 66, 456-468, 2017.
- Rasche, D., Köhli, M., Schrön, M., Blume, T., and Güntner, A.: Towards disentangling heterogeneous soil moisture patterns in cosmic-ray neutron sensor footprints, *Hydrology and Earth System Sciences*, 25, 6547-6566, 2021.
- Romano, P. K. and Forget, B.: The OpenMC monte carlo particle transport code, *Annals of Nuclear Energy*, 51, 274-281, 2013.
- 650 Rosolem, R., Shuttleworth, W. J., Zreda, M., Franz, T. E., Zeng, X., and Kurc, S.: The effect of atmospheric water vapor on neutron count in the cosmic-ray soil moisture observing system, *Journal of Hydrometeorology*, 14, 1659-1671, 2013.
- Rost, S., Gerten, D., Bondeau, A., Lucht, W., Rohwer, J., and Schaphoff, S.: Agricultural green and blue water consumption and its influence on the global water system, *Water Resources Research*, 44, 2008.
- Sato, T.: Analytical model for estimating terrestrial cosmic ray fluxes nearly anytime and anywhere in the world: Extension of PARMA/EXPACS, *PloS one*, 10, e0144679, 2015.
- 655 Schattan, P., Baroni, G., Oswald, S. E., Schöber, J., Fey, C., Kormann, C., Huttenlau, M., and Achleitner, S.: Continuous monitoring of snowpack dynamics in alpine terrain by aboveground neutron sensing, *Water Resources Research*, 53, 3615-3634, 2017.
- Schattan, P., Köhli, M., Schrön, M., Baroni, G., and Oswald, S. E.: Sensing area-average snow water equivalent with cosmic-ray neutrons: The influence of fractional snow cover, *Water Resources Research*, 55, 10796-10812, 2019.
- 660 Schrön, M., Köhli, M., Scheffele, L., Iwema, J., Bogena, H. R., Lv, L., Martini, E., Baroni, G., Rosolem, R., and Weimar, J.: Improving calibration and validation of cosmic-ray neutron sensors in the light of spatial sensitivity, *Hydrology and Earth System Sciences*, 21, 5009-5030, 2017.
- Schrön, M., Rosolem, R., Köhli, M., Piussi, L., Schröter, I., Iwema, J., Kögler, S., Oswald, S., Wollschläger, U., and Samaniego, L.: Cosmic-ray neutron rover surveys of field soil moisture and the influence of roads, *Water Resources Research*, 54, 6441-6459, 2018a.
- 665 Schrön, M., Zacharias, S., Womack, G., Köhli, M., Desilets, D., Oswald, S. E., Bumberger, J., Mollenhauer, H., Kögler, S., and Remmler, P.: Intercomparison of cosmic-ray neutron sensors and water balance monitoring in an urban environment, *Geoscientific Instrumentation, Methods and Data Systems*, 7, 83-99, 2018b.
- Schrön, M., Köhli, M., and Zacharias, S.: Signal contribution of distant areas to cosmic-ray neutron sensors - implications on footprint and sensitivity, *EGU sphere*, 2022, 1-25, 10.5194/egusphere-2022-219, 2022.
- 670 Shibata, K., Iwamoto, O., Nakagawa, T., Iwamoto, N., Ichihara, A., Kunieda, S., Chiba, S., Furutaka, K., Otuka, N., and Ohsawa, T.: JENDL-4.0: a new library for nuclear science and engineering, *Journal of Nuclear Science and Technology*, 48, 1-30, 2011.
- Shuttleworth, J., Rosolem, R., Zreda, M., and Franz, T.: The COsmic-ray Soil Moisture Interaction Code (COSMIC) for use in data assimilation, *Hydrology and Earth System Sciences*, 17, 3205-3217, 2013.
- Siebert, S., Webber, H., Zhao, G., and Ewert, F.: Heat stress is overestimated in climate impact studies for irrigated agriculture, *Environmental Research Letters*, 12, 054023, 10.1088/1748-9326/aa702f, 2017.
- 675 Tack, J., Barkley, A., and Hendricks, N.: Irrigation offsets wheat yield reductions from warming temperatures, *Environmental Research Letters*, 12, 114027, 10.1088/1748-9326/aa8d27, 2017.
- Troy, T. J., Kipgen, C., and Pal, I.: The impact of climate extremes and irrigation on US crop yields, *Environmental Research Letters*, 10, 054013, 10.1088/1748-9326/10/5/054013, 2015.
- 680 Vereecken, H., Huisman, J., Bogena, H., Vanderborght, J., Vrugt, J., and Hopmans, J.: On the value of soil moisture measurements in vadose zone hydrology: A review, *Water resources research*, 44, 2008.
- Wagner, W., Blöschl, G., Pampaloni, P., Calvet, J.-C., Bizzarri, B., Wigneron, J.-P., and Kerr, Y.: Operational readiness of microwave remote sensing of soil moisture for hydrologic applications, *Hydrology Research*, 38, 1-20, 2007.
- Walker, J. P., Houser, P. R., and Willgoose, G. R.: Active microwave remote sensing for soil moisture measurement: a field evaluation using ERS-2, *Hydrological processes*, 18, 1975-1997, 2004.
- 685 Webber, H., Ewert, F., Kimball, B., Siebert, S., White, J. W., Wall, G., Ottman, M. J., Trawally, D., and Gaiser, T.: Simulating canopy temperature for modelling heat stress in cereals, *Environmental Modelling & Software*, 77, 143-155, 2016.
- Weimar, J., Köhli, M., Budach, C., and Schmidt, U.: Large-Scale Boron-Lined Neutron Detection Systems as a  $^3\text{He}$  Alternative for Cosmic Ray Neutron Sensing, *Frontiers in Water*, 2, 10.3389/frwa.2020.00016, 2020.

- 690 Zaveri, E. and Lobell, D. B.: The role of irrigation in changing wheat yields and heat sensitivity in India, *Nature Communications*, 10, 4144, 10.1038/s41467-019-12183-9, 2019.
- Zreda, M., Desilets, D., Ferré, T., and Scott, R. L.: Measuring soil moisture content non-invasively at intermediate spatial scale using cosmic-ray neutrons, *Geophysical research letters*, 35, 2008.
- 695 Zreda, M., Shuttleworth, W., Zeng, X., Zweck, C., Desilets, D., Franz, T., and Rosolem, R.: COSMOS: The cosmic-ray soil moisture observing system, *Hydrology and Earth System Sciences*, 16, 4079-4099, 2012.